

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365477

Luminaire Tested: **FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365477
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-17)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR86
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.250", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1708.9 lumens
Efficiency: N/A
Efficacy: 63.3 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.83
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365477

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR86

Luminous Intensity Polar Plot

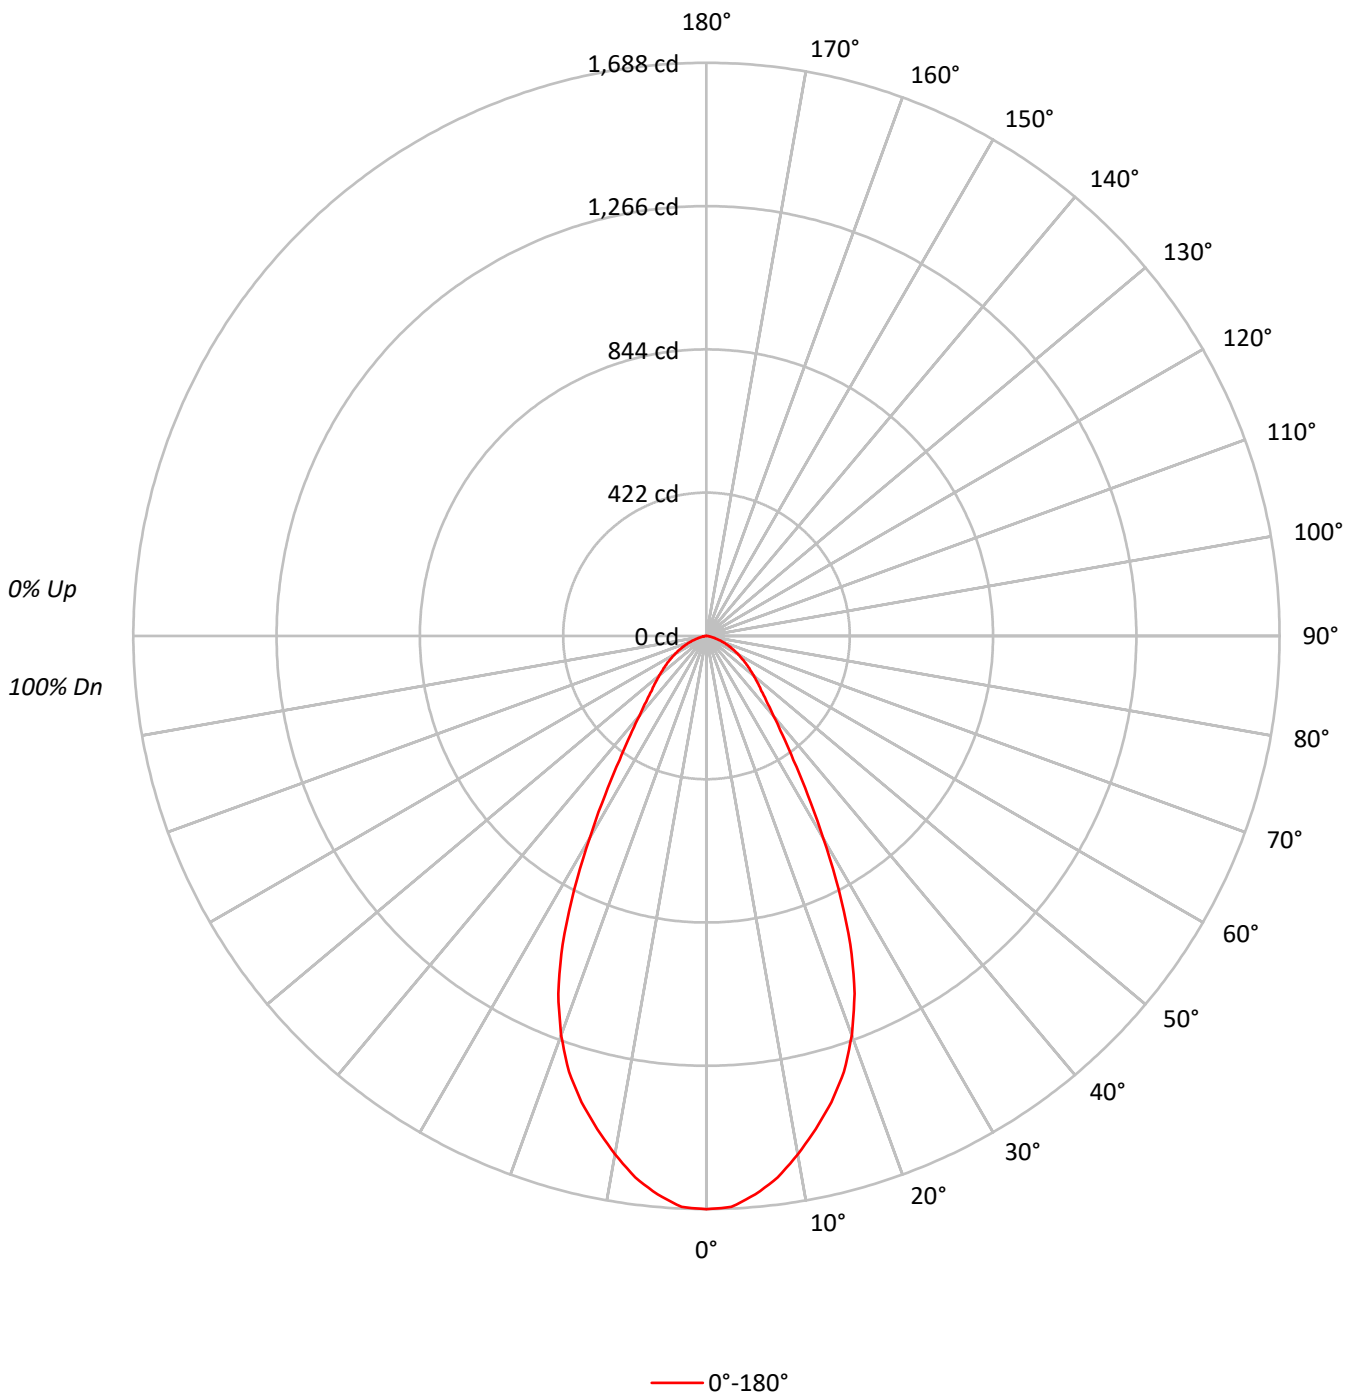



TEST NUMBER: P365477

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	98	93	89	94	91	87		91	88	85		88	86	84	82
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82	79	76	74
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	72	69	68
5	87	78	71	66	86	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67	62	59	57
7	78	67	60	56	76	66	60	55	65	59	55		64	59	55		63	58	54	53
8	74	63	56	51	72	62	56	51	61	55	51		60	55	51		59	54	51	49
9	70	59	52	48	69	59	52	48	58	52	48		57	51	48		56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45		53	48	45		53	48	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	120885
5°	118688
10°	112717
15°	105350
20°	95338
25°	79178
30°	56809
35°	38993
40°	28705
45°	23189
50°	20162
55°	17726
60°	15323
65°	13046
70°	10258
75°	7193
80°	4536
85°	4929



TEST NUMBER: P365477

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.5	9.0
10°-20°	396.6	23.2
20°-30°	449.8	26.3
30°-40°	288.3	16.9
40°-50°	180.7	10.6
50°-60°	127.4	7.5
60°-70°	76.6	4.5
70°-80°	29.2	1.7
80°-90°	5.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1000.9	58.6
0°-40°	1289.2	75.4
0°-60°	1597.3	93.5
0°-90°	1708.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1708.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1688	
5°	1651	154
15°	1421	397
25°	1002	450
35°	446	288
45°	229	181
55°	142	127
65°	77	77
75°	26	29
85°	6	6
90°	0	



TEST NUMBER: P365477

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR86

CANDELA DISTRIBUTION (FULL):

0°	
0°	1688.3
2.5°	1683.3
5°	1651.3
7.5°	1608.3
10°	1550.3
12.5°	1487.3
15°	1421.2
17.5°	1346.2
20°	1251.2
22.5°	1140.2
25°	1002.2
27.5°	843.1
30°	687.1
32.5°	555.1
35°	446.1
37.5°	367.1
40°	307.1
42.5°	263.0
45°	229.0
47.5°	204.0
50°	181.0
52.5°	161.0
55°	142.0
57.5°	124.0
60°	107.0
62.5°	92.0
65°	77.0
67.5°	63.0
70°	49.0
72.5°	37.0
75°	26.0
77.5°	18.0
80°	11.0
82.5°	7.0
85°	6.0
87.5°	3.0
90°	0.0

(END OF REPORT)