

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365479

Luminaire Tested: **FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR89BI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365479
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-13)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR89BI
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM ACRYLIC, CLEAR RFI 0.125", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1732.9 lumens
Efficiency: N/A
Efficacy: 64.2 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.84
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365479

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR89BI

Luminous Intensity Polar Plot

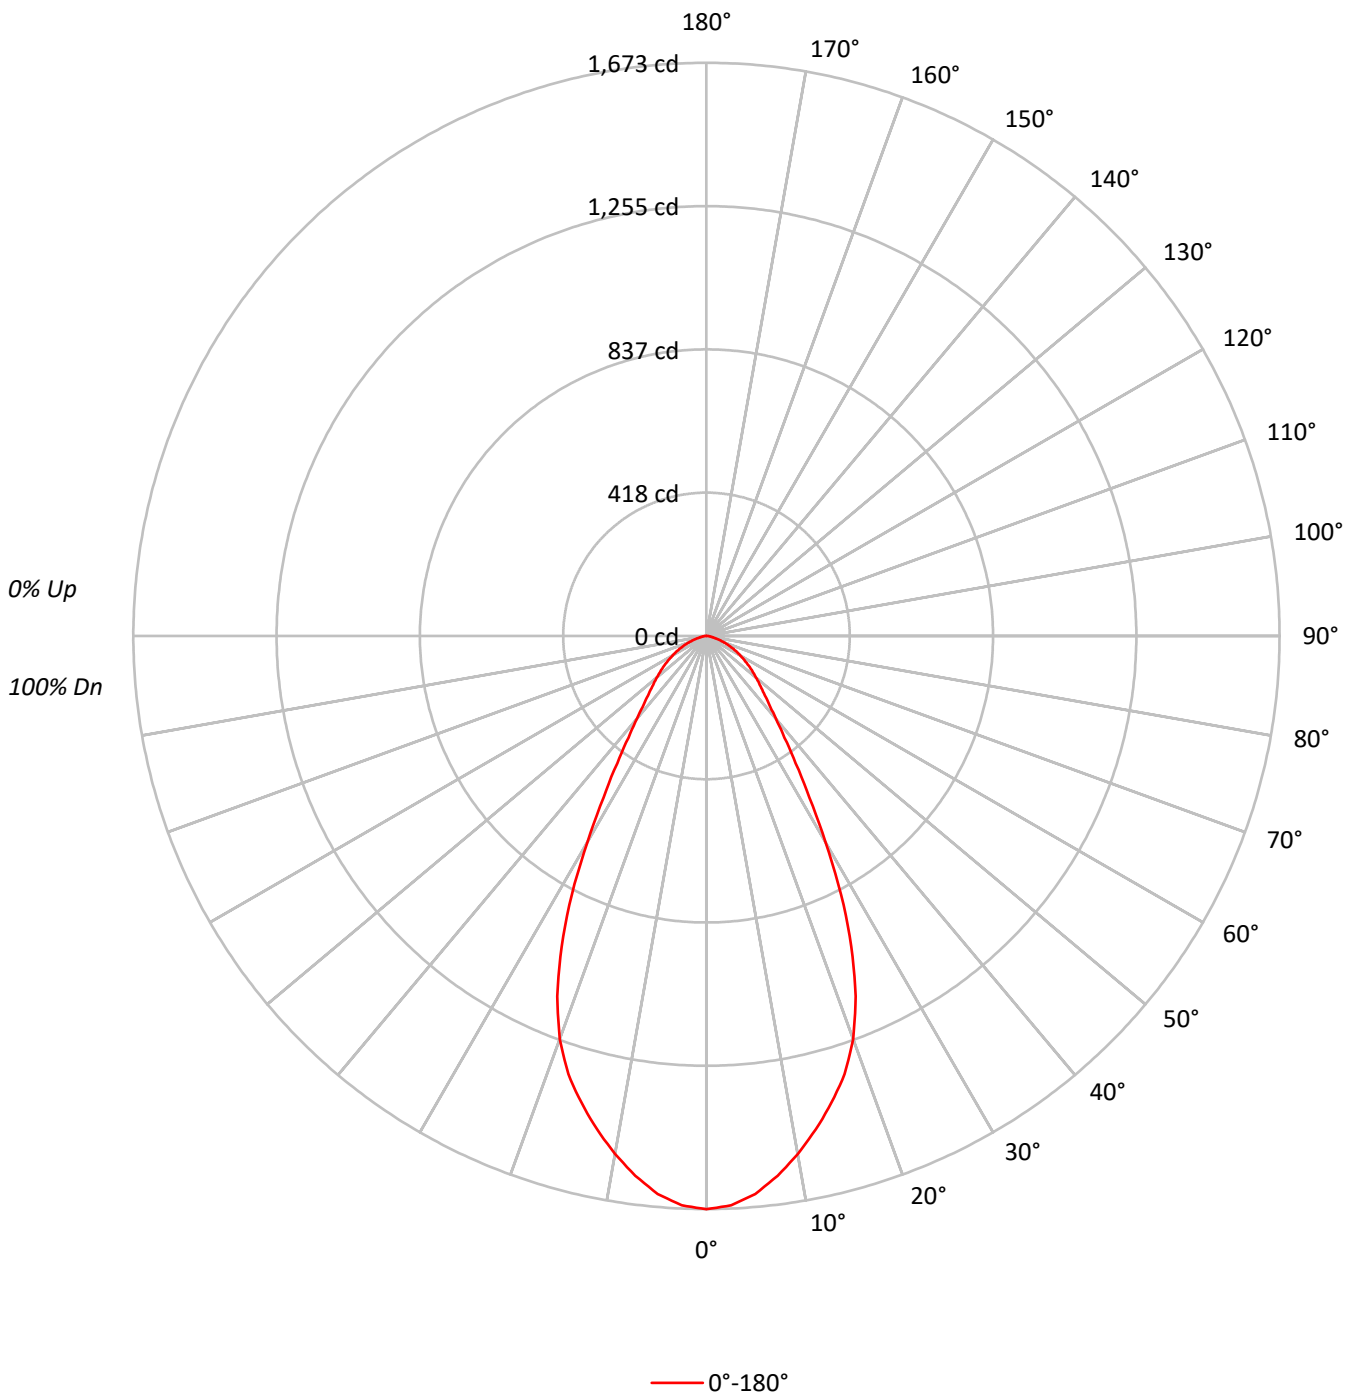



TEST NUMBER: P365479

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR89BI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	109	106	104	101	102	100	98		99	97	95		95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	85	83	81
3	98	91	85	80	96	89	84	79	86	82	78		84	80	77		82	78	75	74
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76	72	69	67
5	87	77	70	65	85	76	70	65	74	68	64		72	67	64		71	66	63	61
6	82	72	65	60	80	71	64	59	69	63	59		68	62	58		66	62	58	56
7	77	67	60	55	76	66	59	55	65	59	54		63	58	54		62	57	54	52
8	73	62	56	51	72	62	55	51	61	55	50		59	54	50		58	54	50	48
9	69	59	52	47	68	58	52	47	57	51	47		56	51	47		55	50	47	45
10	66	55	49	44	65	55	48	44	54	48	44		53	48	44		52	47	44	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	119804
5°	117531
10°	111619
15°	104535
20°	95414
25°	79091
30°	57387
35°	39693
40°	29349
45°	23999
50°	21053
55°	18725
60°	16325
65°	13893
70°	11096
75°	8023
80°	5773
85°	6572



TEST NUMBER: P365479

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR89BI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.8	8.8
10°-20°	394.3	22.8
20°-30°	451.0	26.0
30°-40°	292.4	16.9
40°-50°	186.4	10.8
50°-60°	134.3	7.7
60°-70°	81.6	4.7
70°-80°	32.5	1.9
80°-90°	7.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	998.1	57.6
0°-40°	1290.5	74.5
0°-60°	1611.2	93.0
0°-90°	1732.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1732.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1673	
5°	1635	153
15°	1410	394
25°	1001	451
35°	454	292
45°	237	186
55°	150	134
65°	82	82
75°	29	33
85°	8	8
90°	0	



TEST NUMBER: P365479

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-MW-BTR89BI

CANDELA DISTRIBUTION (FULL):

0°	
0°	1673.2
2.5°	1663.2
5°	1635.2
7.5°	1589.2
10°	1535.2
12.5°	1475.2
15°	1410.2
17.5°	1341.2
20°	1252.2
22.5°	1138.1
25°	1001.1
27.5°	851.1
30°	694.1
32.5°	559.1
35°	454.1
37.5°	374.0
40°	314.0
42.5°	270.0
45°	237.0
47.5°	211.0
50°	189.0
52.5°	169.0
55°	150.0
57.5°	131.0
60°	114.0
62.5°	98.0
65°	82.0
67.5°	67.0
70°	53.0
72.5°	41.0
75°	29.0
77.5°	20.0
80°	14.0
82.5°	9.0
85°	8.0
87.5°	4.0
90°	0.0

(END OF REPORT)