

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366185

Luminaire Tested: **FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL84**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P366185  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL84  
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.125", 3000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2621.0 lumens  
Efficiency: N/A  
Efficacy: 97.1 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
CIE Type: Direct


Input Watts (W): 27  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P366185

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL84

### Luminous Intensity Polar Plot

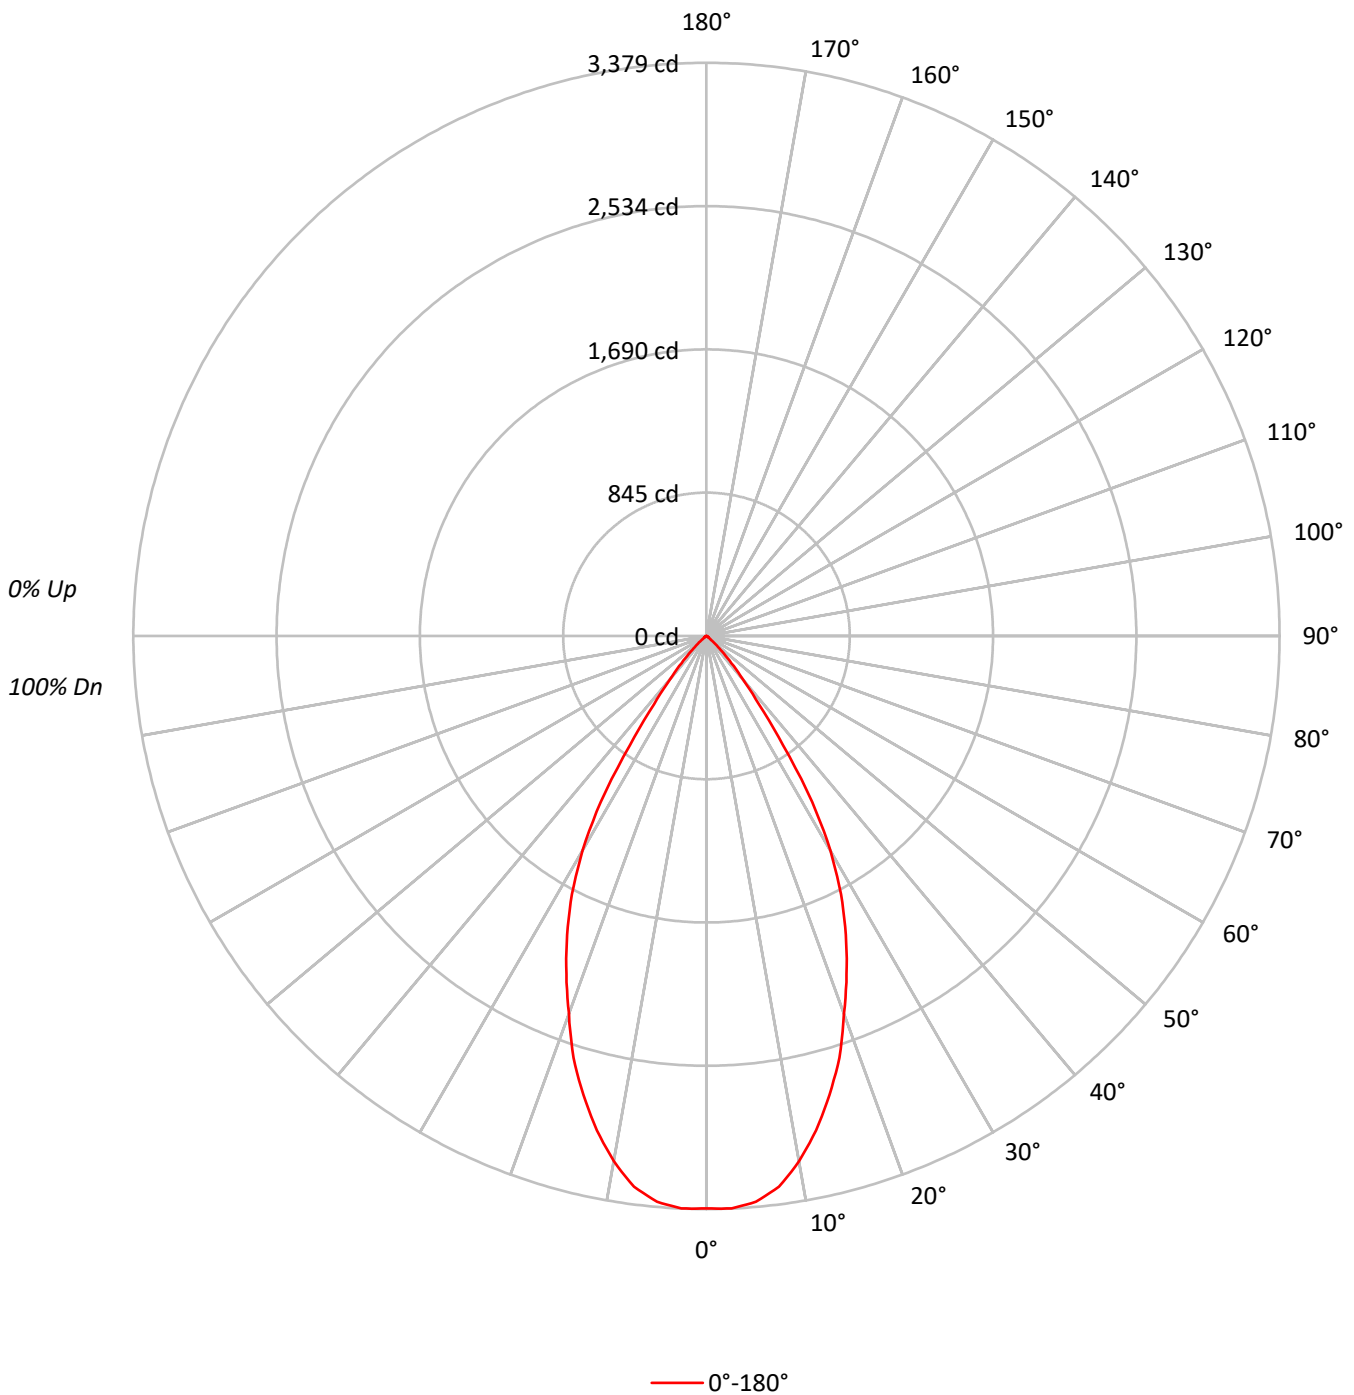



TEST NUMBER: P366185

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL84

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75		81	77	74		80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		76	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65		73	68	65		72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62		69	65	61		68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58		66	61	58		65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62	58	55	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	92205
5°	91817
10°	87221
15°	79229
20°	68941
25°	58614
30°	46107
35°	26306
40°	11838
45°	4983
50°	1572
55°	476
60°	328
65°	259
70°	240
75°	317
80°	157
85°	313



TEST NUMBER: P366185

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL84

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	313.2	12.0
10°-20°	779.3	29.7
20°-30°	883.1	33.7
30°-40°	512.0	19.5
40°-50°	113.5	4.3
50°-60°	12.4	0.5
60°-70°	4.1	0.2
70°-80°	2.6	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	1975.7	75.4
0°-40°	2487.6	94.9
0°-60°	2613.6	99.7
0°-90°	2621.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2621.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3376	
5°	3349	313
15°	2802	779
25°	1945	883
35°	789	512
45°	129	114
55°	10	12
65°	4	4
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P366185

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL84

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3375.6
2.5°	3378.6
5°	3348.6
7.5°	3275.6
10°	3144.6
12.5°	2985.6
15°	2801.7
17.5°	2607.7
20°	2371.7
22.5°	2158.7
25°	1944.8
27.5°	1716.8
30°	1461.8
32.5°	1160.9
35°	788.9
37.5°	506.9
40°	332.0
42.5°	217.0
45°	129.0
47.5°	72.0
50°	37.0
52.5°	17.0
55°	10.0
57.5°	8.0
60°	6.0
62.5°	5.0
65°	4.0
67.5°	3.0
70°	3.0
72.5°	3.0
75°	3.0
77.5°	2.0
80°	1.0
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)