

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366187

Luminaire Tested: **FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366187
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL86
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.250", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2579.0 lumens
Efficiency: N/A
Efficacy: 95.5 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366187

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL86

Luminous Intensity Polar Plot

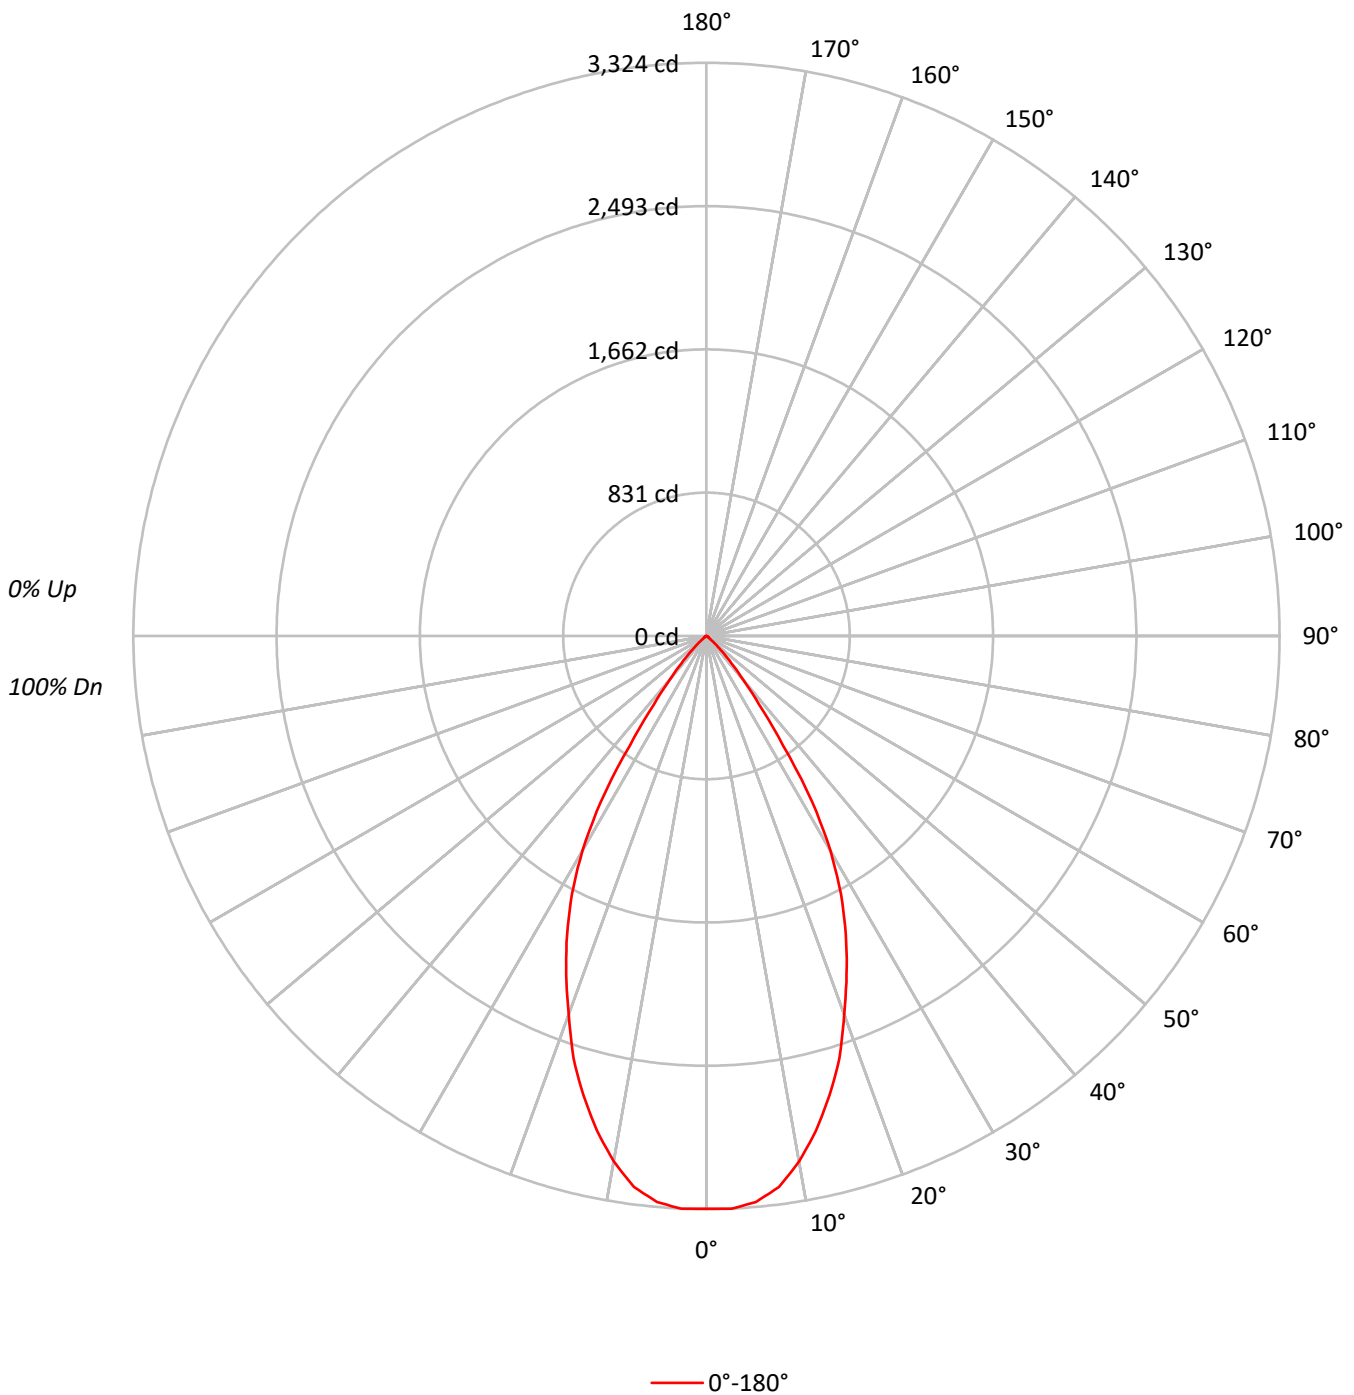



TEST NUMBER: P366187

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75		81	77	74		80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		76	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65		73	68	65		72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62		69	65	61		68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58		66	61	58		65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	90728
5°	90345
10°	85823
15°	77959
20°	67837
25°	57674
30°	45369
35°	25886
40°	11646
45°	4902
50°	1547
55°	467
60°	322
65°	252
70°	240
75°	317
80°	157
85°	313



TEST NUMBER: P366187

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	308.2	11.9
10°-20°	766.8	29.7
20°-30°	869.0	33.7
30°-40°	503.8	19.5
40°-50°	111.7	4.3
50°-60°	12.2	0.5
60°-70°	4.0	0.2
70°-80°	2.6	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1944.0	75.4
0°-40°	2447.8	94.9
0°-60°	2571.7	99.7
0°-90°	2579.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2579.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3322	
5°	3295	308
15°	2757	767
25°	1914	869
35°	776	504
45°	127	112
55°	10	12
65°	4	4
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P366187

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8035-F6LBXVM1-WMH-BL86

CANDELA DISTRIBUTION (FULL):

	0°
0°	3321.5
2.5°	3324.4
5°	3294.9
7.5°	3223.1
10°	3094.2
12.5°	2937.8
15°	2756.8
17.5°	2565.9
20°	2333.7
22.5°	2124.1
25°	1913.6
27.5°	1689.3
30°	1438.4
32.5°	1142.3
35°	776.3
37.5°	498.8
40°	326.6
42.5°	213.5
45°	126.9
47.5°	70.8
50°	36.4
52.5°	16.7
55°	9.8
57.5°	7.9
60°	5.9
62.5°	4.9
65°	3.9
67.5°	3.0
70°	3.0
72.5°	3.0
75°	3.0
77.5°	2.0
80°	1.0
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0

(END OF REPORT)