

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364773

Luminaire Tested: **FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR84**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P364773  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR84  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 3000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2286.0 lumens  
Efficiency: N/A  
Efficacy: 84.7 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 27  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P364773

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR84

### Luminous Intensity Polar Plot

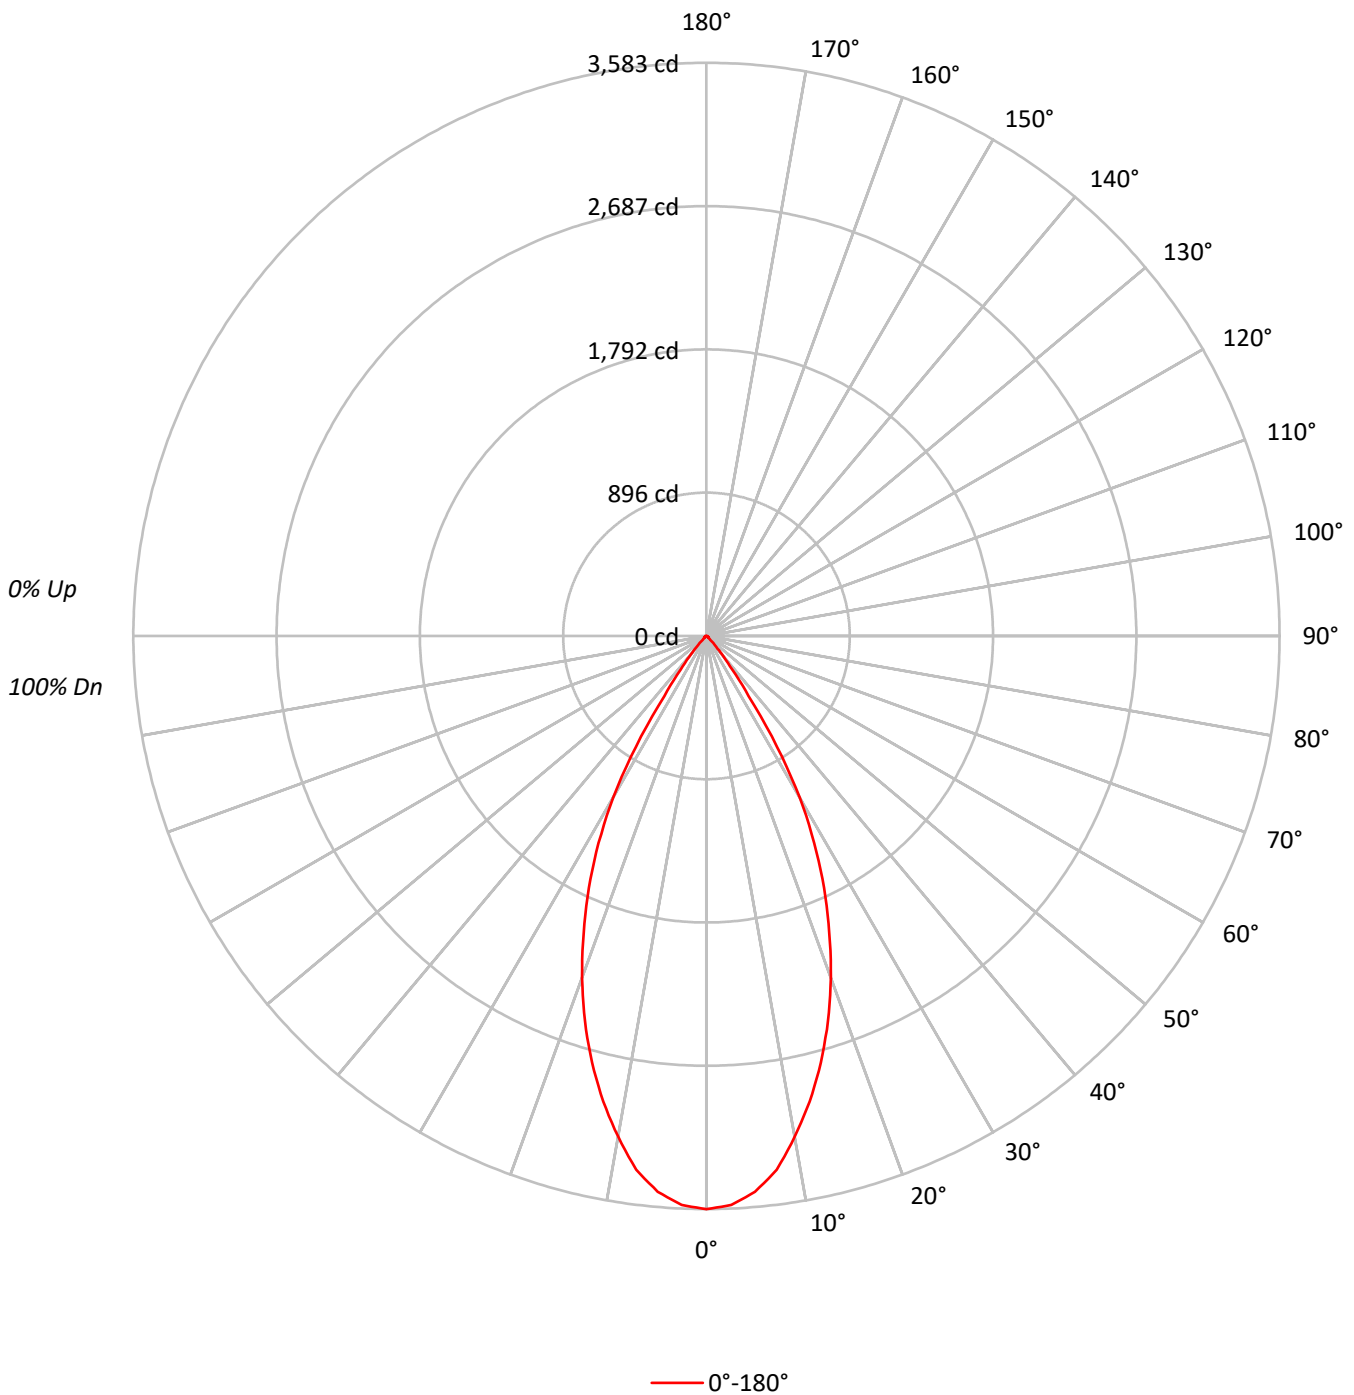



TEST NUMBER: P364773

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR84

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68	75	71	68	74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65	72	67	64	71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61	68	64	61	68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	256578
5°	250730
10°	231141
15°	204726
20°	173326
25°	137317
30°	96503
35°	40191
40°	13787
45°	3686
50°	2027
55°	1897
60°	1733
65°	1711
70°	1696
75°	1964
80°	2515
85°	4190



TEST NUMBER: P364773

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR84

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	323.3	14.1
10°-20°	766.2	33.5
20°-30°	786.5	34.4
30°-40°	333.1	14.6
40°-50°	40.9	1.8
50°-60°	13.6	0.6
60°-70°	10.0	0.4
70°-80°	7.8	0.3
80°-90°	4.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1876.0	82.1
0°-40°	2209.1	96.6
0°-60°	2263.6	99.0
0°-90°	2286.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2286.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3583	
5°	3488	323
15°	2762	766
25°	1738	787
35°	460	333
45°	36	41
55°	15	14
65°	10	10
75°	7	8
85°	5	5
90°	0	



TEST NUMBER: P364773

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR84

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3583.4
2.5°	3560.1
5°	3488.4
7.5°	3365.1
10°	3179.1
12.5°	2981.1
15°	2761.8
17.5°	2526.3
20°	2274.7
22.5°	2006.9
25°	1738.1
27.5°	1460.2
30°	1167.2
32.5°	822.6
35°	459.8
37.5°	263.7
40°	147.5
42.5°	77.8
45°	36.4
47.5°	21.2
50°	18.2
52.5°	16.2
55°	15.2
57.5°	14.1
60°	12.1
62.5°	11.1
65°	10.1
67.5°	9.1
70°	8.1
72.5°	8.1
75°	7.1
77.5°	7.1
80°	6.1
82.5°	6.1
85°	5.1
87.5°	3.0
90°	0.0

(END OF REPORT)