

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364779

Luminaire Tested: **FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR94**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364779
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-27)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR94
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM GLASS, TEMPERED CLEAR 0.187", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2335.0 lumens
Efficiency: N/A
Efficacy: 86.5 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364779

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR94

Luminous Intensity Polar Plot

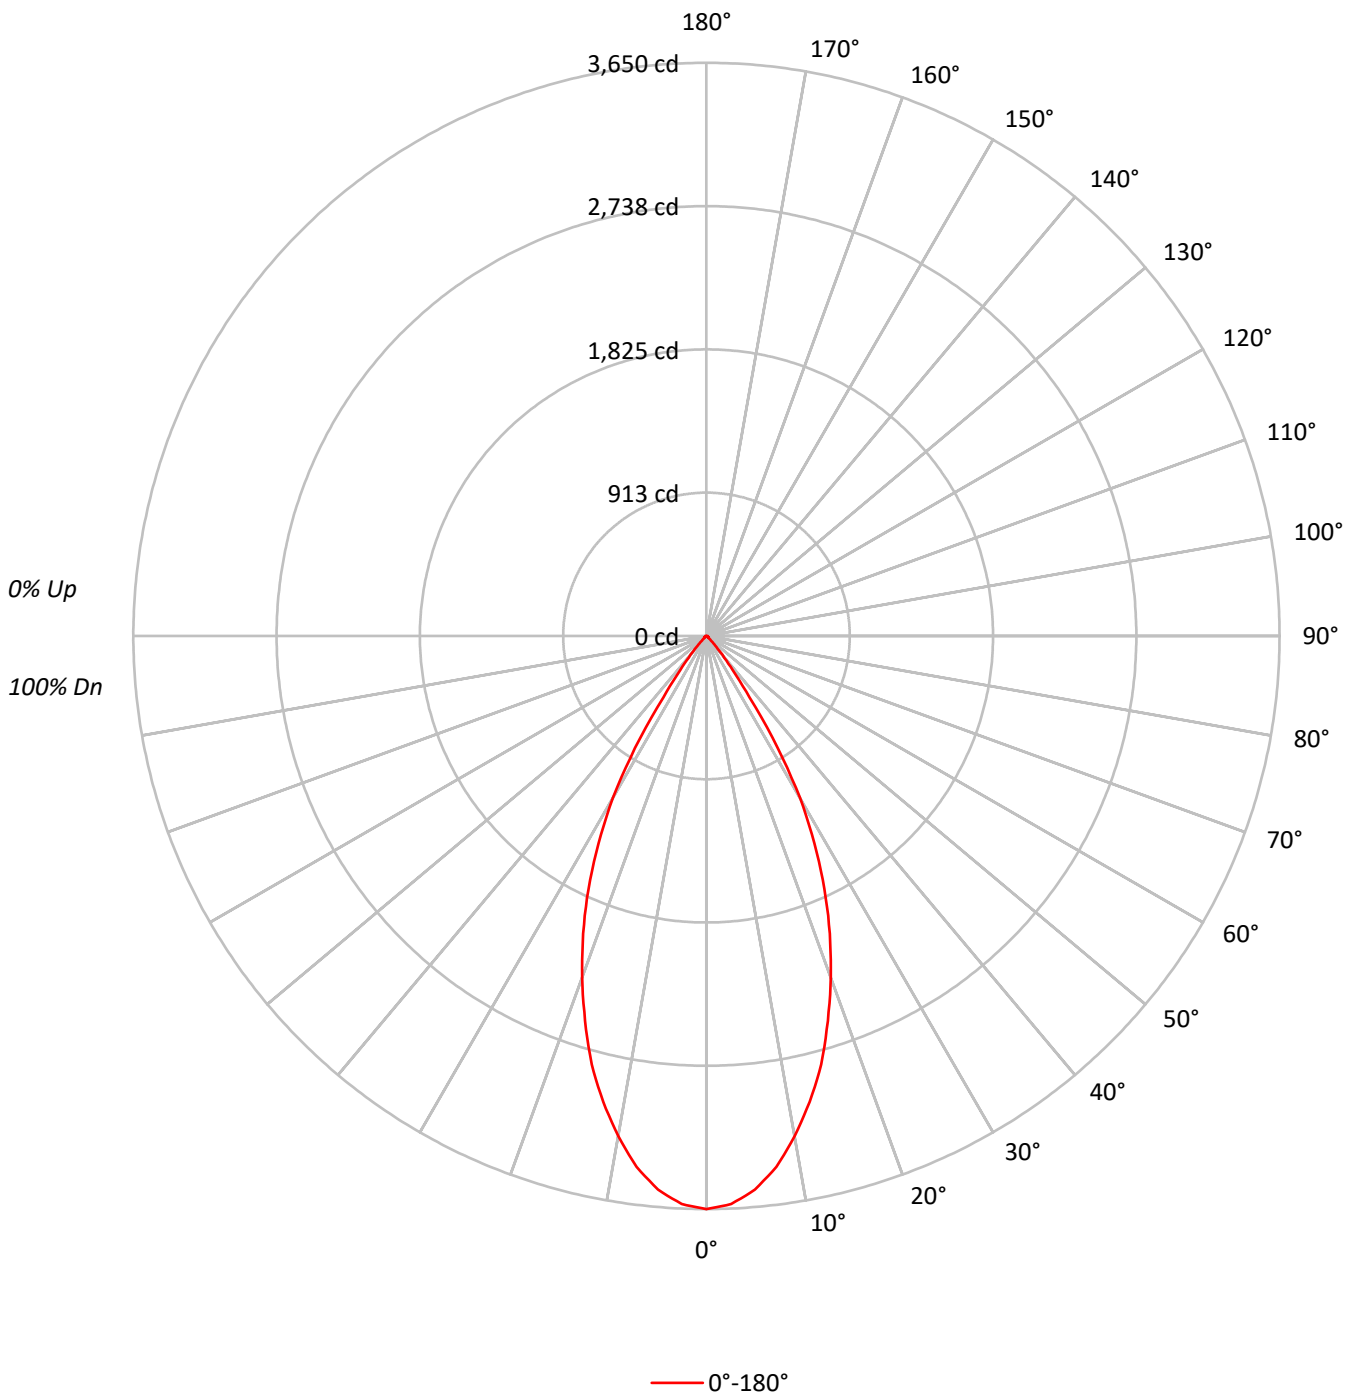



TEST NUMBER: P364779

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR94

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	88
3	104	98	93	90	102	96	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		77	74	71	70
7	87	78	73	69	85	77	72	68	76	72	68		75	71	68		74	70	67	66
8	83	74	69	65	82	74	68	65	73	68	64		72	67	64		71	67	64	63
9	79	71	65	61	78	70	65	61	69	64	61		68	64	61		67	64	61	59
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	261361
5°	254439
10°	235191
15°	209374
20°	176335
25°	140516
30°	98421
35°	41694
40°	14544
45°	3990
50°	2027
55°	1897
60°	1876
65°	1711
70°	1696
75°	2241
80°	2928
85°	4190



TEST NUMBER: P364779

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR94

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	328.2	14.1
10°-20°	780.9	33.4
20°-30°	803.3	34.4
30°-40°	343.1	14.7
40°-50°	42.8	1.8
50°-60°	13.7	0.6
60°-70°	10.1	0.4
70°-80°	8.2	0.3
80°-90°	4.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1912.3	81.9
0°-40°	2255.4	96.6
0°-60°	2311.9	99.0
0°-90°	2335.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2335.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3650	
5°	3540	328
15°	2824	781
25°	1779	803
35°	477	343
45°	39	43
55°	15	14
65°	10	10
75°	8	8
85°	5	5
90°	0	



TEST NUMBER: P364779

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-LI-BTR94

CANDELA DISTRIBUTION (FULL):

0°	
0°	3650.2
2.5°	3620.9
5°	3540.0
7.5°	3410.7
10°	3234.8
12.5°	3038.8
15°	2824.5
17.5°	2569.9
20°	2314.2
22.5°	2051.5
25°	1778.6
27.5°	1490.6
30°	1190.4
32.5°	845.8
35°	477.0
37.5°	272.9
40°	155.6
42.5°	80.8
45°	39.4
47.5°	21.2
50°	18.2
52.5°	16.2
55°	15.2
57.5°	14.1
60°	13.1
62.5°	11.1
65°	10.1
67.5°	9.1
70°	8.1
72.5°	8.1
75°	8.1
77.5°	7.1
80°	7.1
82.5°	6.1
85°	5.1
87.5°	3.0
90°	0.0

(END OF REPORT)