

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365488

Luminaire Tested: **FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365488  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-34)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV  
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS ACRYLIC, CLEAR 0.125", 3000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2449.0 lumens  
Efficiency: N/A  
Efficacy: 90.7 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.95  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
CIE Type: Direct


Input Watts (W): 27  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365488

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV

### Luminous Intensity Polar Plot

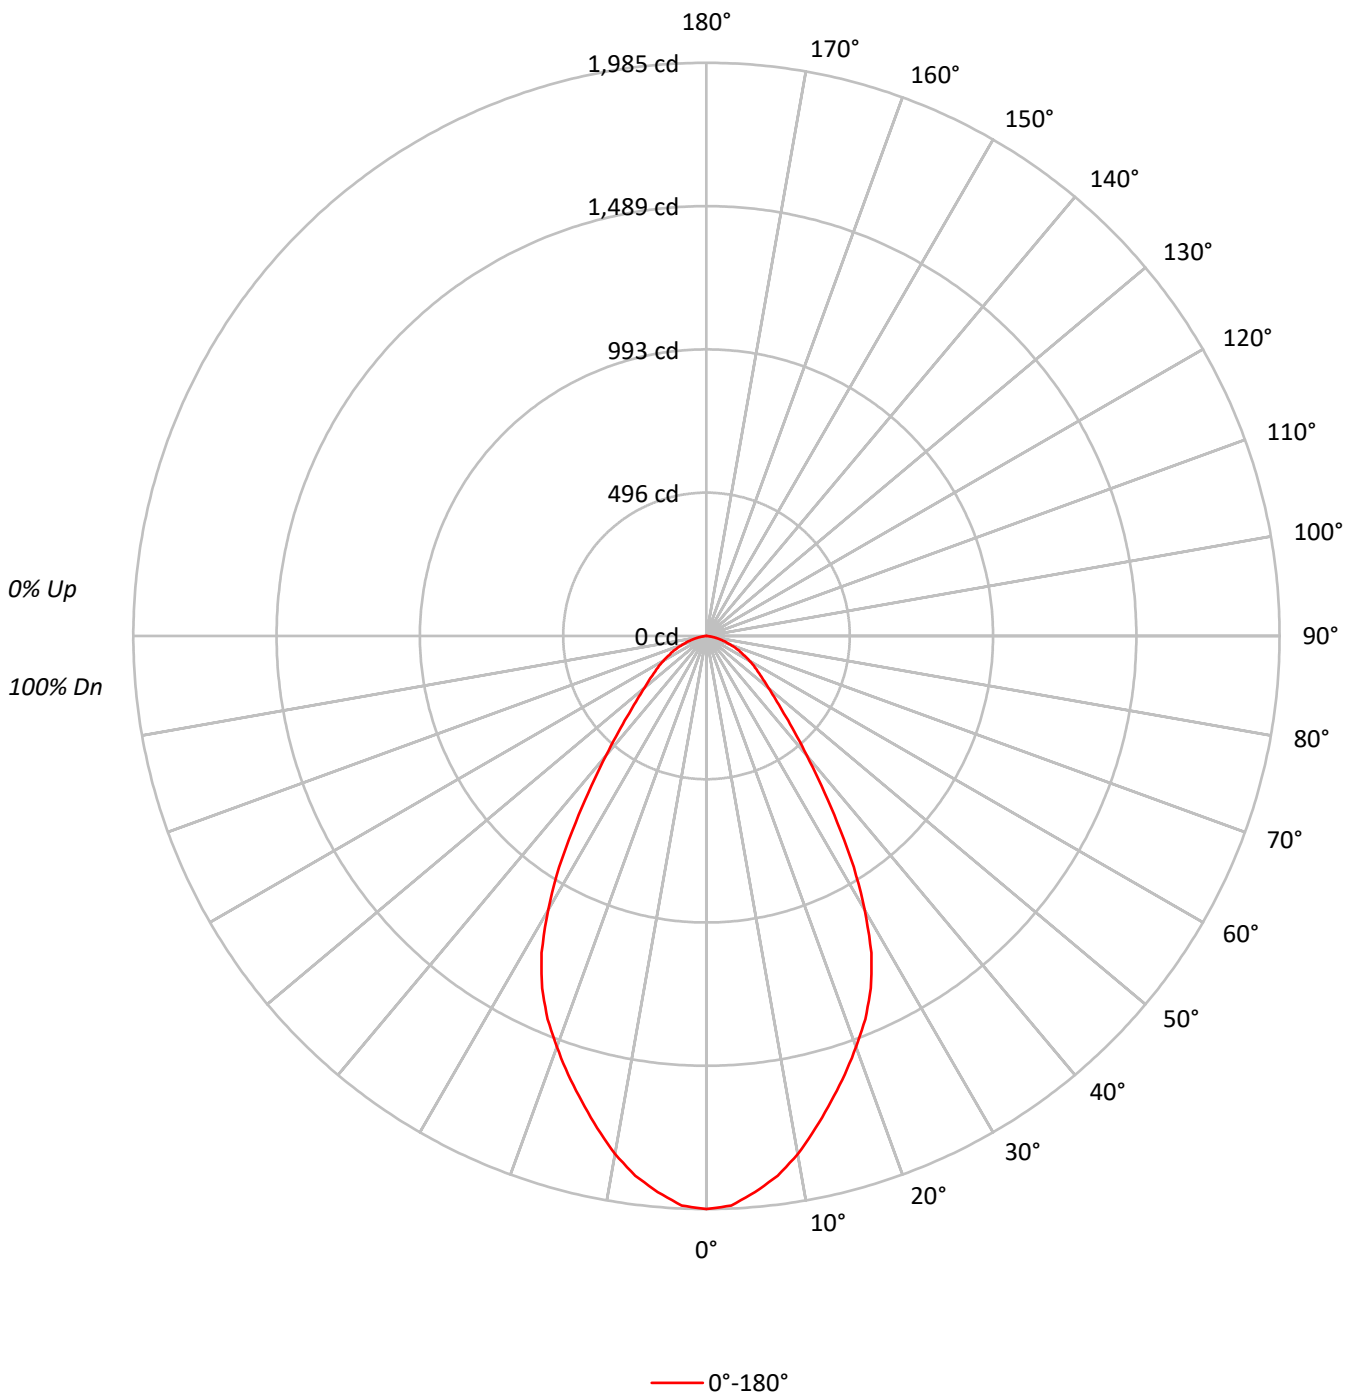



TEST NUMBER: P365488

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86	90	87	84	87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	77	74	72
4	91	82	75	70	89	80	74	69	78	73	68	76	71	67	74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62	70	65	61	69	64	61	59
6	80	69	62	57	78	68	62	57	67	61	56	65	60	56	64	59	55	54
7	75	64	57	52	74	64	57	52	62	56	52	61	55	51	60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	47	57	51	47	56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42
10	64	52	46	41	62	52	45	41	51	45	41	50	45	41	49	44	41	39

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	54213
5°	53005
10°	50533
15°	47175
20°	44024
25°	40588
30°	34569
35°	26296
40°	19252
45°	14644
50°	11903
55°	10448
60°	9391
65°	8299
70°	7028
75°	5551
80°	3822
85°	1598



TEST NUMBER: P365488

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	181.2	7.4
10°-20°	468.6	19.1
20°-30°	610.6	24.9
30°-40°	497.2	20.3
40°-50°	299.8	12.2
50°-60°	198.7	8.1
60°-70°	127.6	5.2
70°-80°	56.9	2.3
80°-90°	8.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1260.4	51.5
0°-40°	1757.5	71.8
0°-60°	2256.1	92.1
0°-90°	2449.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2449.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1985	
5°	1933	181
15°	1668	469
25°	1347	611
35°	789	497
45°	379	300
55°	219	199
65°	128	128
75°	53	57
85°	5	9
90°	0	



TEST NUMBER: P365488

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BL89BV

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1984.7
2.5°	1974.5
5°	1933.1
7.5°	1885.6
10°	1821.9
12.5°	1746.1
15°	1668.2
17.5°	1592.4
20°	1514.5
22.5°	1436.7
25°	1346.7
27.5°	1236.5
30°	1096.0
32.5°	949.4
35°	788.6
37.5°	654.1
40°	539.9
42.5°	449.9
45°	379.1
47.5°	323.5
50°	280.1
52.5°	248.7
55°	219.4
57.5°	196.1
60°	171.9
62.5°	149.6
65°	128.4
67.5°	108.2
70°	88.0
72.5°	69.8
75°	52.6
77.5°	37.4
80°	24.3
82.5°	13.1
85°	5.1
87.5°	1.0
90°	0.0

(END OF REPORT)