

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365491

Luminaire Tested: **FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR81**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365491  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR81  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 3000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1591.0 lumens  
Efficiency: N/A  
Efficacy: 58.9 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.19  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 27  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365491

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR81

### Luminous Intensity Polar Plot

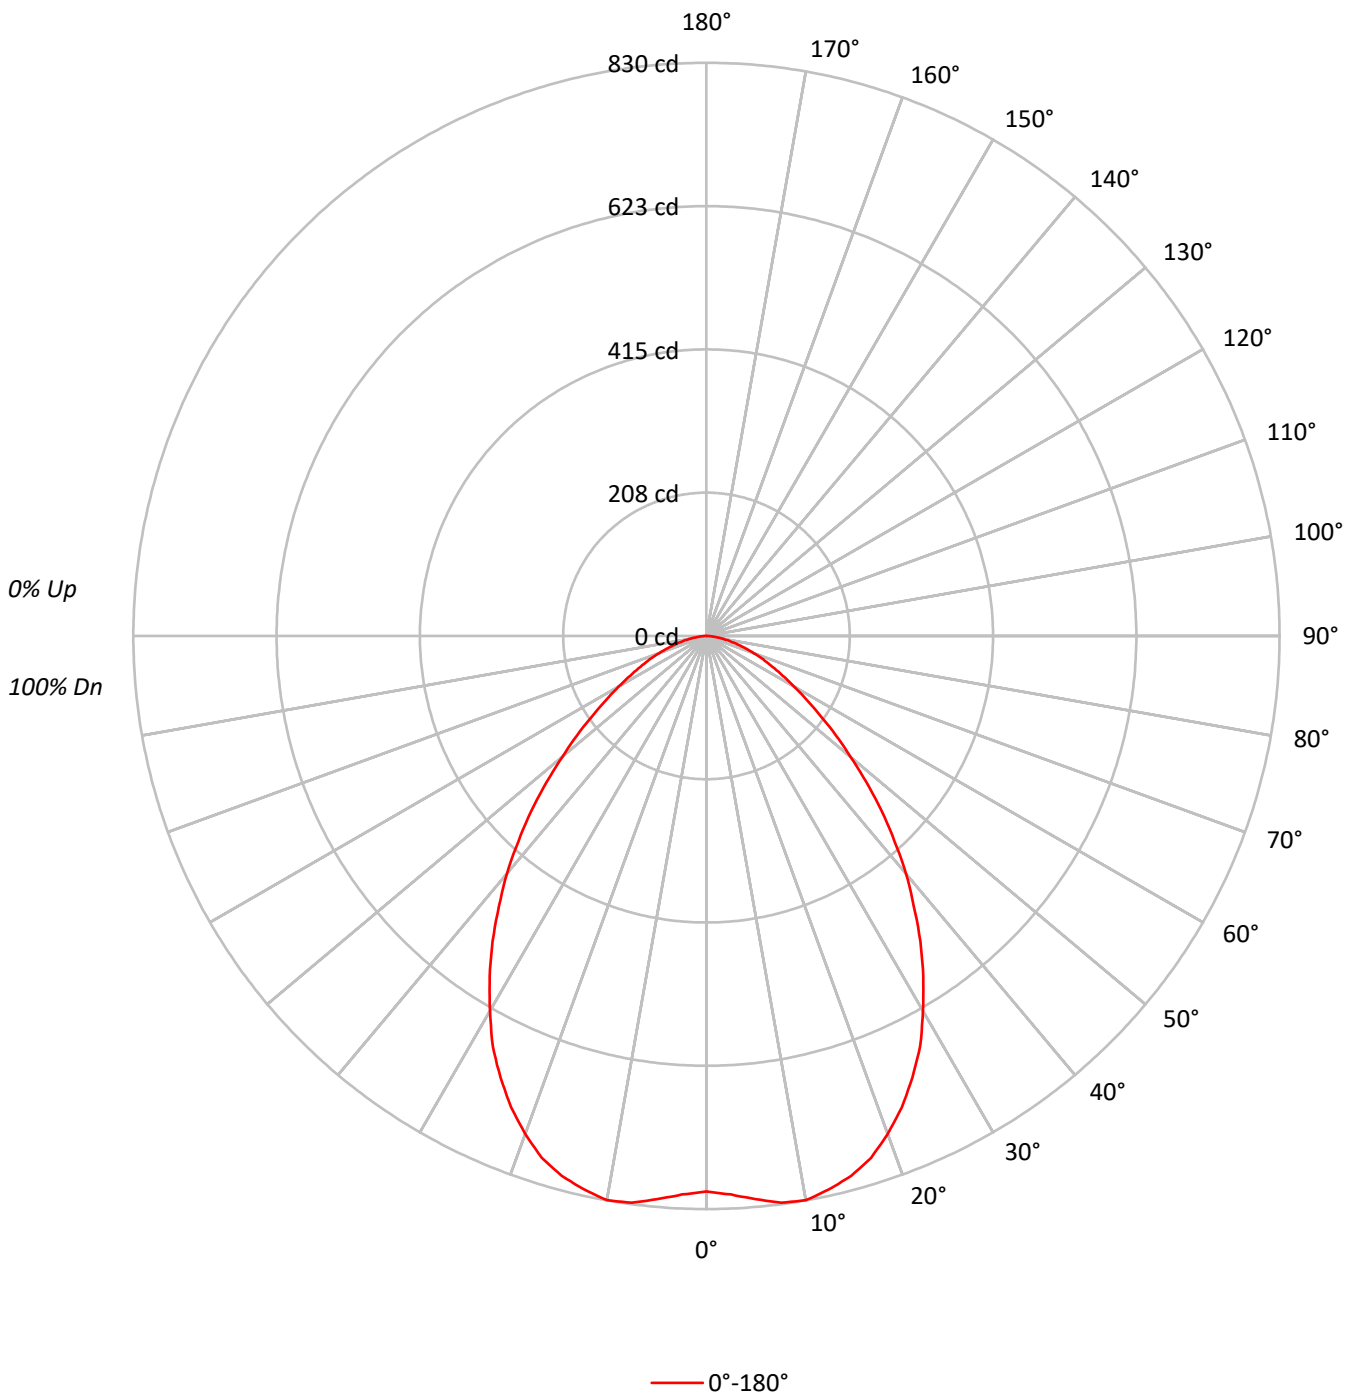



TEST NUMBER: P365491

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR81

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	103	100	108	105	101	99	101	98	96		97	95	93		93	91	90	88
2	103	96	90	85	100	94	89	84	90	86	82		87	84	80		84	81	79	77
3	95	86	79	73	93	84	78	73	81	76	71		79	74	70		76	72	69	67
4	88	77	70	64	86	76	69	64	74	68	63		72	66	62		70	65	61	59
5	82	70	62	57	80	69	62	56	67	61	56		65	60	55		64	59	55	53
6	76	64	56	51	74	63	56	50	62	55	50		60	54	49		58	53	49	47
7	71	59	51	45	69	58	51	45	57	50	45		55	49	45		54	49	44	43
8	66	54	46	41	65	54	46	41	52	46	41		51	45	41		50	45	40	39
9	62	50	43	38	61	50	42	37	48	42	37		47	41	37		46	41	37	35
10	59	47	39	34	58	46	39	34	45	39	34		44	38	34		43	38	34	32

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	57611
5°	58844
10°	60332
15°	60014
20°	58458
25°	55737
30°	51815
35°	47184
40°	42043
45°	36332
50°	30288
55°	25104
60°	20994
65°	17807
70°	15241
75°	12587
80°	10020
85°	7476



TEST NUMBER: P365491

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR81

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	78.6	4.9
10°-20°	227.4	14.3
20°-30°	323.4	20.3
30°-40°	336.3	21.1
40°-50°	276.4	17.4
50°-60°	182.5	11.5
60°-70°	105.8	6.6
70°-80°	49.3	3.1
80°-90°	11.3	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	629.4	39.6
0°-40°	965.7	60.7
0°-60°	1424.7	89.5
0°-90°	1591.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1591.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	805	
5°	819	79
15°	810	227
25°	706	323
35°	540	336
45°	359	276
55°	201	183
65°	105	106
75°	46	49
85°	9	11
90°	0	



TEST NUMBER: P365491

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR81

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	804.6
2.5°	809.6
5°	818.7
7.5°	827.8
10°	829.8
12.5°	820.7
15°	809.6
17.5°	792.4
20°	767.2
22.5°	738.9
25°	705.5
27.5°	670.1
30°	626.7
32.5°	584.2
35°	539.8
37.5°	493.3
40°	449.8
42.5°	403.3
45°	358.8
47.5°	314.4
50°	271.9
52.5°	236.5
55°	201.1
57.5°	171.8
60°	146.6
62.5°	124.3
65°	105.1
67.5°	88.9
70°	72.8
72.5°	58.6
75°	45.5
77.5°	34.4
80°	24.3
82.5°	16.2
85°	9.1
87.5°	4.0
90°	0.0

(END OF REPORT)