

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365492

Luminaire Tested: **FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365492
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-20)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 3000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1631.0 lumens
Efficiency: N/A
Efficacy: 60.4 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.09
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 27
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365492

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR82

Luminous Intensity Polar Plot

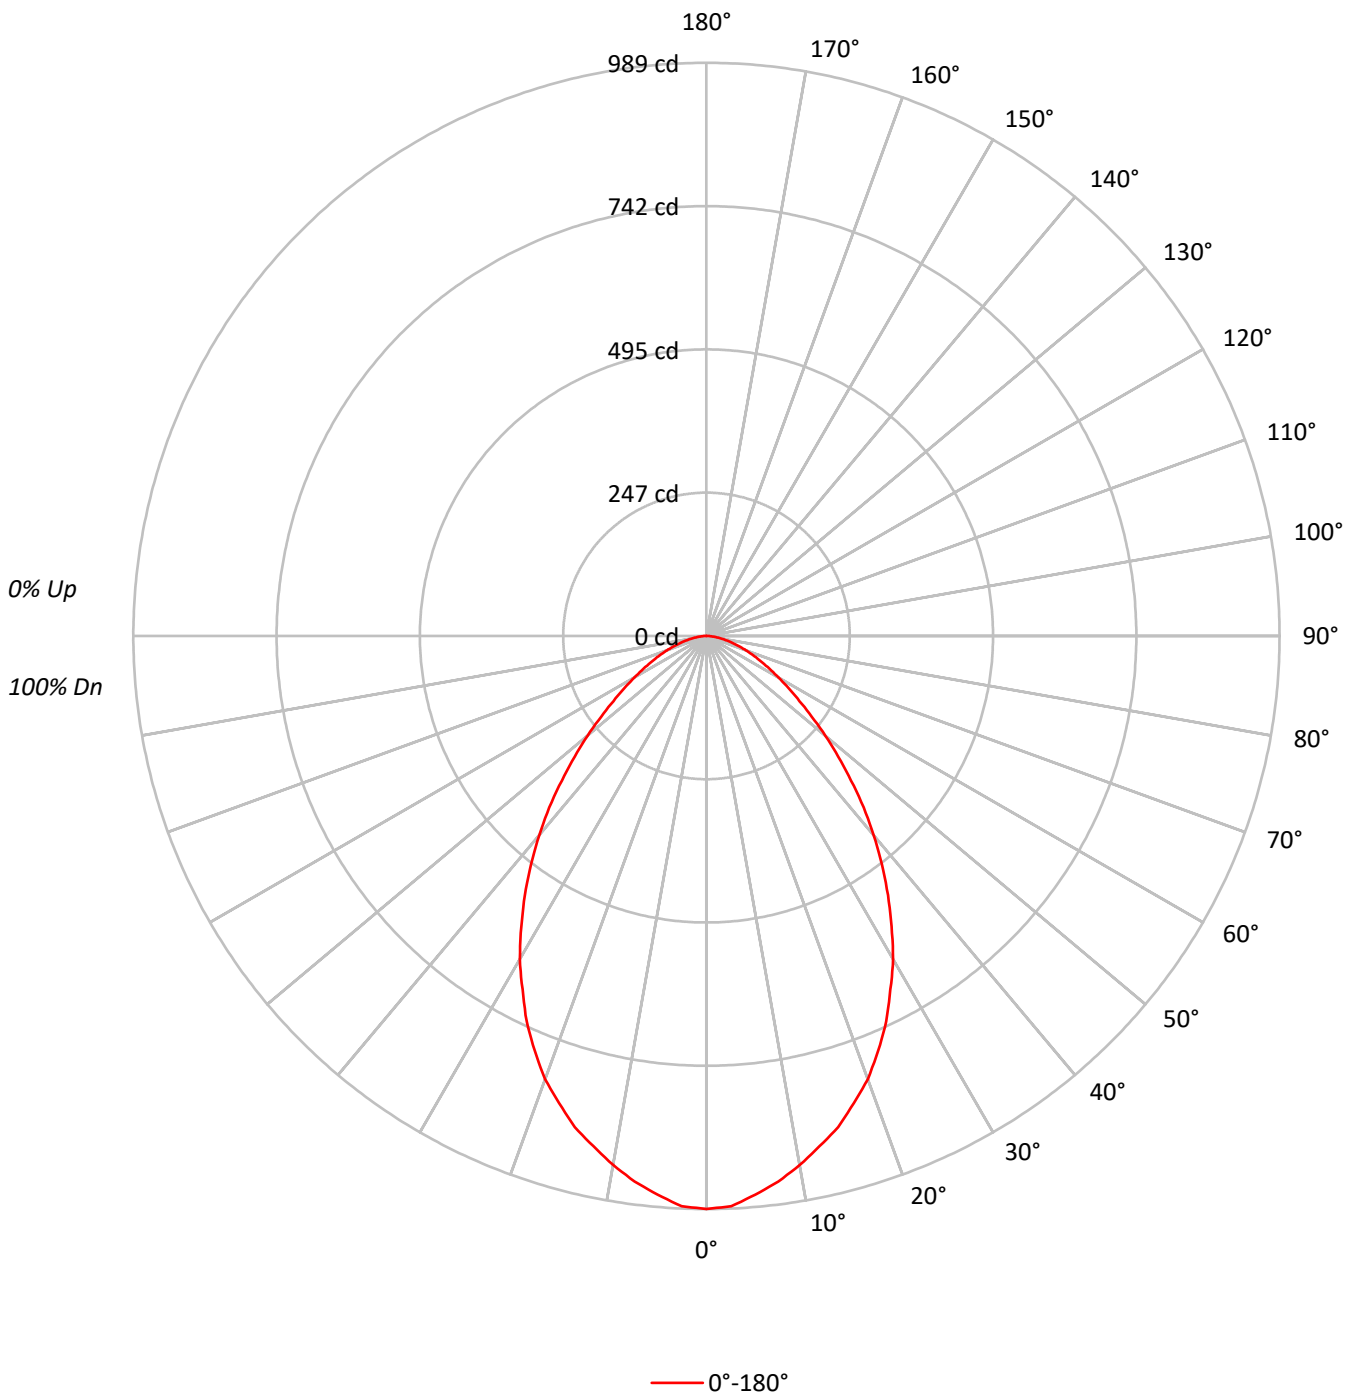



TEST NUMBER: P365492

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	104	100	108	105	102	99	101	98	96		97	95	93		93	92	90	88
2	103	96	90	86	100	94	89	85	91	86	83		88	84	81		85	82	79	77
3	95	86	79	74	93	85	78	73	82	77	72		79	75	71		77	73	70	68
4	88	78	71	65	86	77	70	64	74	68	64		72	67	63		70	66	62	60
5	82	71	63	58	80	70	63	57	68	62	57		66	61	56		64	59	56	54
6	77	65	57	52	75	64	57	51	62	56	51		61	55	50		59	54	50	48
7	72	60	52	46	70	59	52	46	57	51	46		56	50	46		55	50	45	44
8	67	55	47	42	66	54	47	42	53	47	42		52	46	42		51	46	41	40
9	63	51	44	39	62	51	43	39	49	43	38		48	42	38		47	42	38	36
10	60	48	40	36	58	47	40	36	46	40	35		45	39	35		44	39	35	34

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	70800
5°	69547
10°	67406
15°	65054
20°	62017
25°	57989
30°	53245
35°	47726
40°	41958
45°	35735
50°	29842
55°	24480
60°	20564
65°	17468
70°	15241
75°	12864
80°	10432
85°	8298



TEST NUMBER: P365492

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.1	5.6
10°-20°	246.1	15.1
20°-30°	336.1	20.6
30°-40°	340.7	20.9
40°-50°	273.2	16.8
50°-60°	178.0	10.9
60°-70°	103.9	6.4
70°-80°	49.9	3.1
80°-90°	12.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	673.3	41.3
0°-40°	1014.0	62.2
0°-60°	1465.2	89.8
0°-90°	1631.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1631.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	989	
5°	968	91
15°	878	246
25°	734	336
35°	546	341
45°	353	273
55°	196	178
65°	103	104
75°	46	50
85°	10	12
90°	0	



TEST NUMBER: P365492

CATALOG NUMBER: FLD6BX30D010-FEU6B35-8040-F6LBXVM1-MW-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	988.8
2.5°	984.7
5°	967.6
7.5°	949.4
10°	927.1
12.5°	901.8
15°	877.6
17.5°	845.2
20°	813.9
22.5°	774.5
25°	734.0
27.5°	687.5
30°	644.0
32.5°	594.5
35°	546.0
37.5°	497.4
40°	448.9
42.5°	401.4
45°	352.9
47.5°	308.4
50°	267.9
52.5°	228.5
55°	196.1
57.5°	167.8
60°	143.6
62.5°	122.3
65°	103.1
67.5°	86.9
70°	72.8
72.5°	58.6
75°	46.5
77.5°	35.4
80°	25.3
82.5°	17.2
85°	10.1
87.5°	4.0
90°	0.0

(END OF REPORT)