

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364812

Luminaire Tested: **FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364812
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-24)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR87
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, CLEAR 0.375", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2917.0 lumens
Efficiency: N/A
Efficacy: 71.8 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364812

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR87

Luminous Intensity Polar Plot

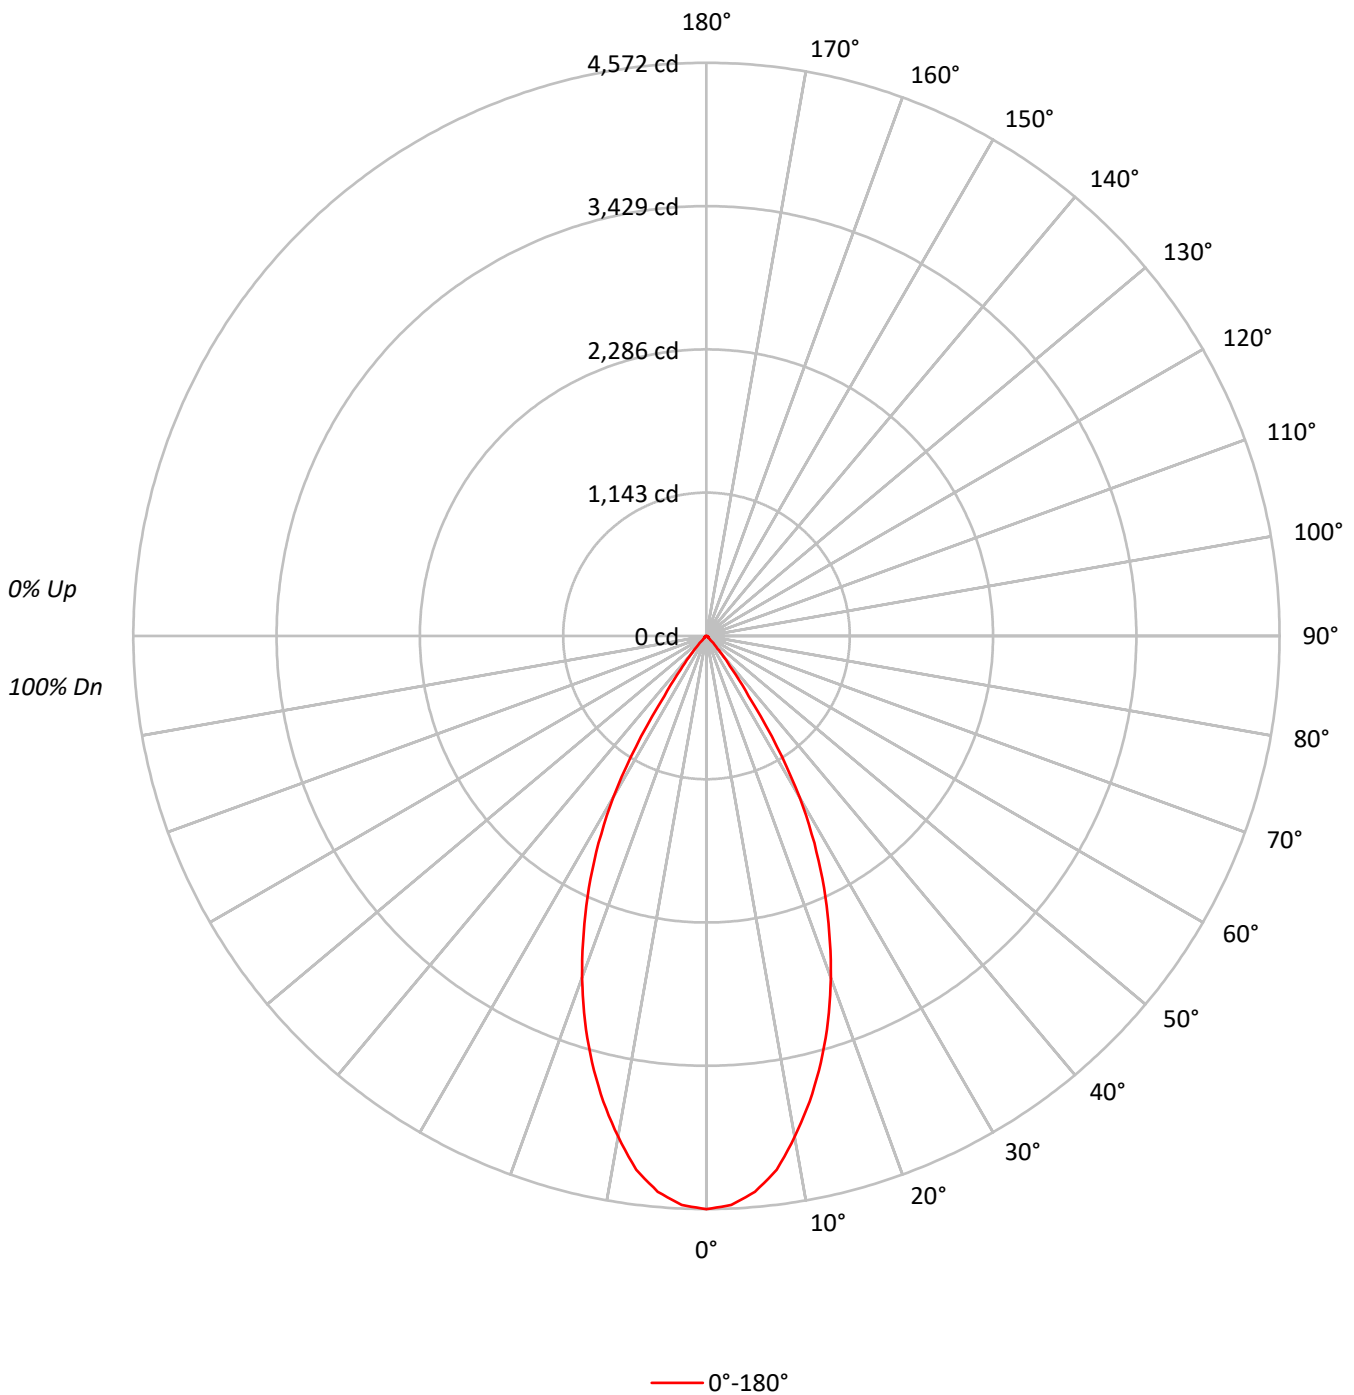



TEST NUMBER: P364812

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	327399
5°	319939
10°	294948
15°	261233
20°	221170
25°	175223
30°	123133
35°	51283
40°	17600
45°	4698
50°	2584
55°	2409
60°	2220
65°	2186
70°	2156
75°	2490
80°	3175
85°	5258



TEST NUMBER: P364812

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	412.5	14.1
10°-20°	977.7	33.5
20°-30°	1003.7	34.4
30°-40°	425.0	14.6
40°-50°	52.3	1.8
50°-60°	17.3	0.6
60°-70°	12.8	0.4
70°-80°	9.9	0.3
80°-90°	6.0	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2393.8	82.1
0°-40°	2818.8	96.6
0°-60°	2888.4	99.0
0°-90°	2917.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2917.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4572	
5°	4451	412
15°	3524	978
25°	2218	1004
35°	587	425
45°	46	52
55°	19	17
65°	13	13
75°	9	10
85°	6	6
90°	0	



TEST NUMBER: P364812

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR87

CANDELA DISTRIBUTION (FULL):

	0°
0°	4572.5
2.5°	4542.8
5°	4451.3
7.5°	4293.9
10°	4056.7
12.5°	3803.9
15°	3524.1
17.5°	3223.7
20°	2902.6
22.5°	2560.9
25°	2217.9
27.5°	1863.3
30°	1489.3
32.5°	1049.6
35°	586.7
37.5°	336.6
40°	188.3
42.5°	99.3
45°	46.4
47.5°	27.1
50°	23.2
52.5°	20.6
55°	19.3
57.5°	18.1
60°	15.5
62.5°	14.2
65°	12.9
67.5°	11.6
70°	10.3
72.5°	10.3
75°	9.0
77.5°	9.0
80°	7.7
82.5°	7.7
85°	6.4
87.5°	3.9
90°	0.0

(END OF REPORT)