

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364814

Luminaire Tested: **FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364814
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-22)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, CLEAR 0.125", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3123.0 lumens
Efficiency: N/A
Efficacy: 76.9 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364814

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BV

Luminous Intensity Polar Plot

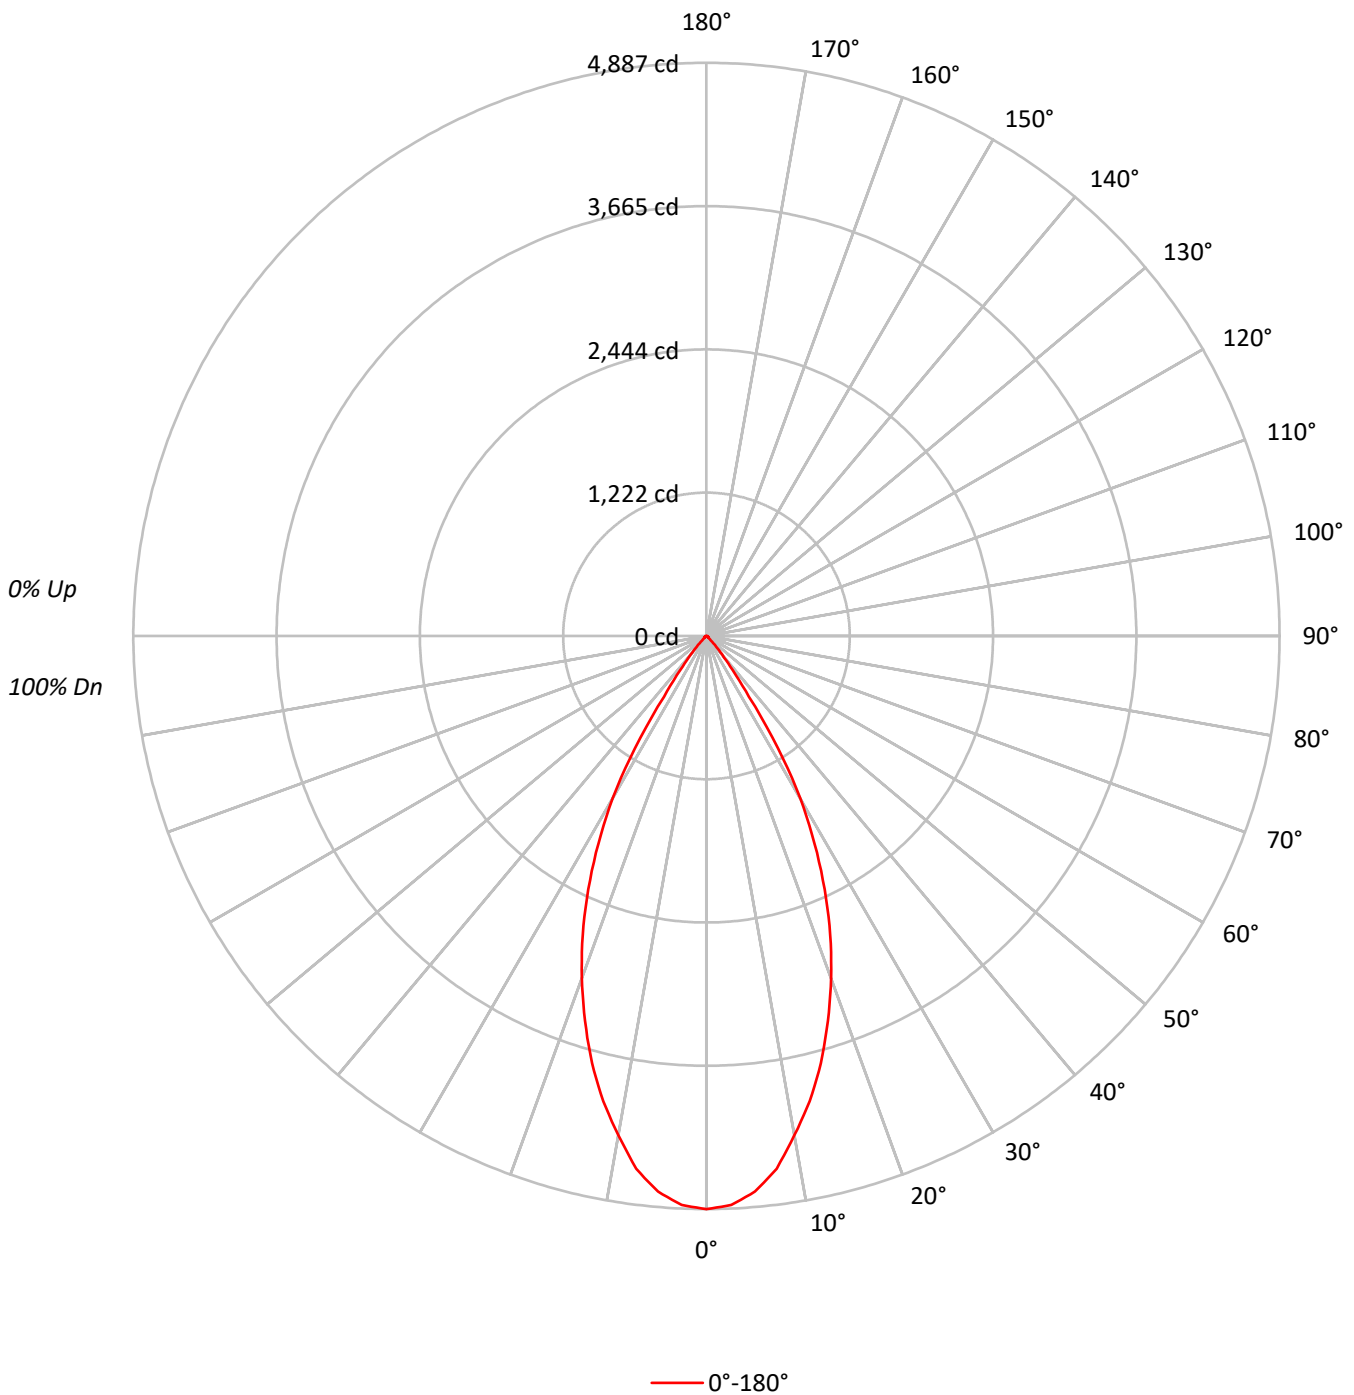



TEST NUMBER: P364814

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	79
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	349933
5°	341810
10°	314164
15°	279595
20°	236821
25°	188322
30°	132402
35°	55252
40°	19077
45°	4931
50°	2495
55°	2297
60°	2263
65°	2236
70°	2198
75°	2905
80°	3257
85°	5422



TEST NUMBER: P364814

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	440.3	14.1
10°-20°	1044.8	33.5
20°-30°	1078.1	34.5
30°-40°	458.6	14.7
40°-50°	55.0	1.8
50°-60°	16.6	0.5
60°-70°	13.1	0.4
70°-80°	10.4	0.3
80°-90°	6.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2563.2	82.1
0°-40°	3021.7	96.8
0°-60°	3093.4	99.1
0°-90°	3123.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3123.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4887	
5°	4756	440
15°	3772	1045
25°	2384	1078
35°	632	459
45°	49	55
55°	18	17
65°	13	13
75°	10	10
85°	7	6
90°	0	



TEST NUMBER: P364814

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-LI-BTR89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	4887.2
2.5°	4855.6
5°	4755.6
7.5°	4581.7
10°	4321.0
12.5°	4064.1
15°	3771.8
17.5°	3442.5
20°	3108.0
22.5°	2759.0
25°	2383.7
27.5°	1996.5
30°	1601.4
32.5°	1135.2
35°	632.1
37.5°	363.5
40°	204.1
42.5°	105.4
45°	48.7
47.5°	26.3
50°	22.4
52.5°	19.8
55°	18.4
57.5°	17.1
60°	15.8
62.5°	14.5
65°	13.2
67.5°	11.9
70°	10.5
72.5°	10.5
75°	10.5
77.5°	9.2
80°	7.9
82.5°	7.9
85°	6.6
87.5°	4.0
90°	0.0

(END OF REPORT)