

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365523

Luminaire Tested: **FLD6BX40D010-FEU6B35-8027-F6LBXVM1-MW-BL89AM**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365523
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-40)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-MW-BL89AM
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, OPAL SMOOTH 0.125", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1337.0 lumens
Efficiency: N/A
Efficacy: 32.9 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.37
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365523

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-MW-BL89AM

Luminous Intensity Polar Plot

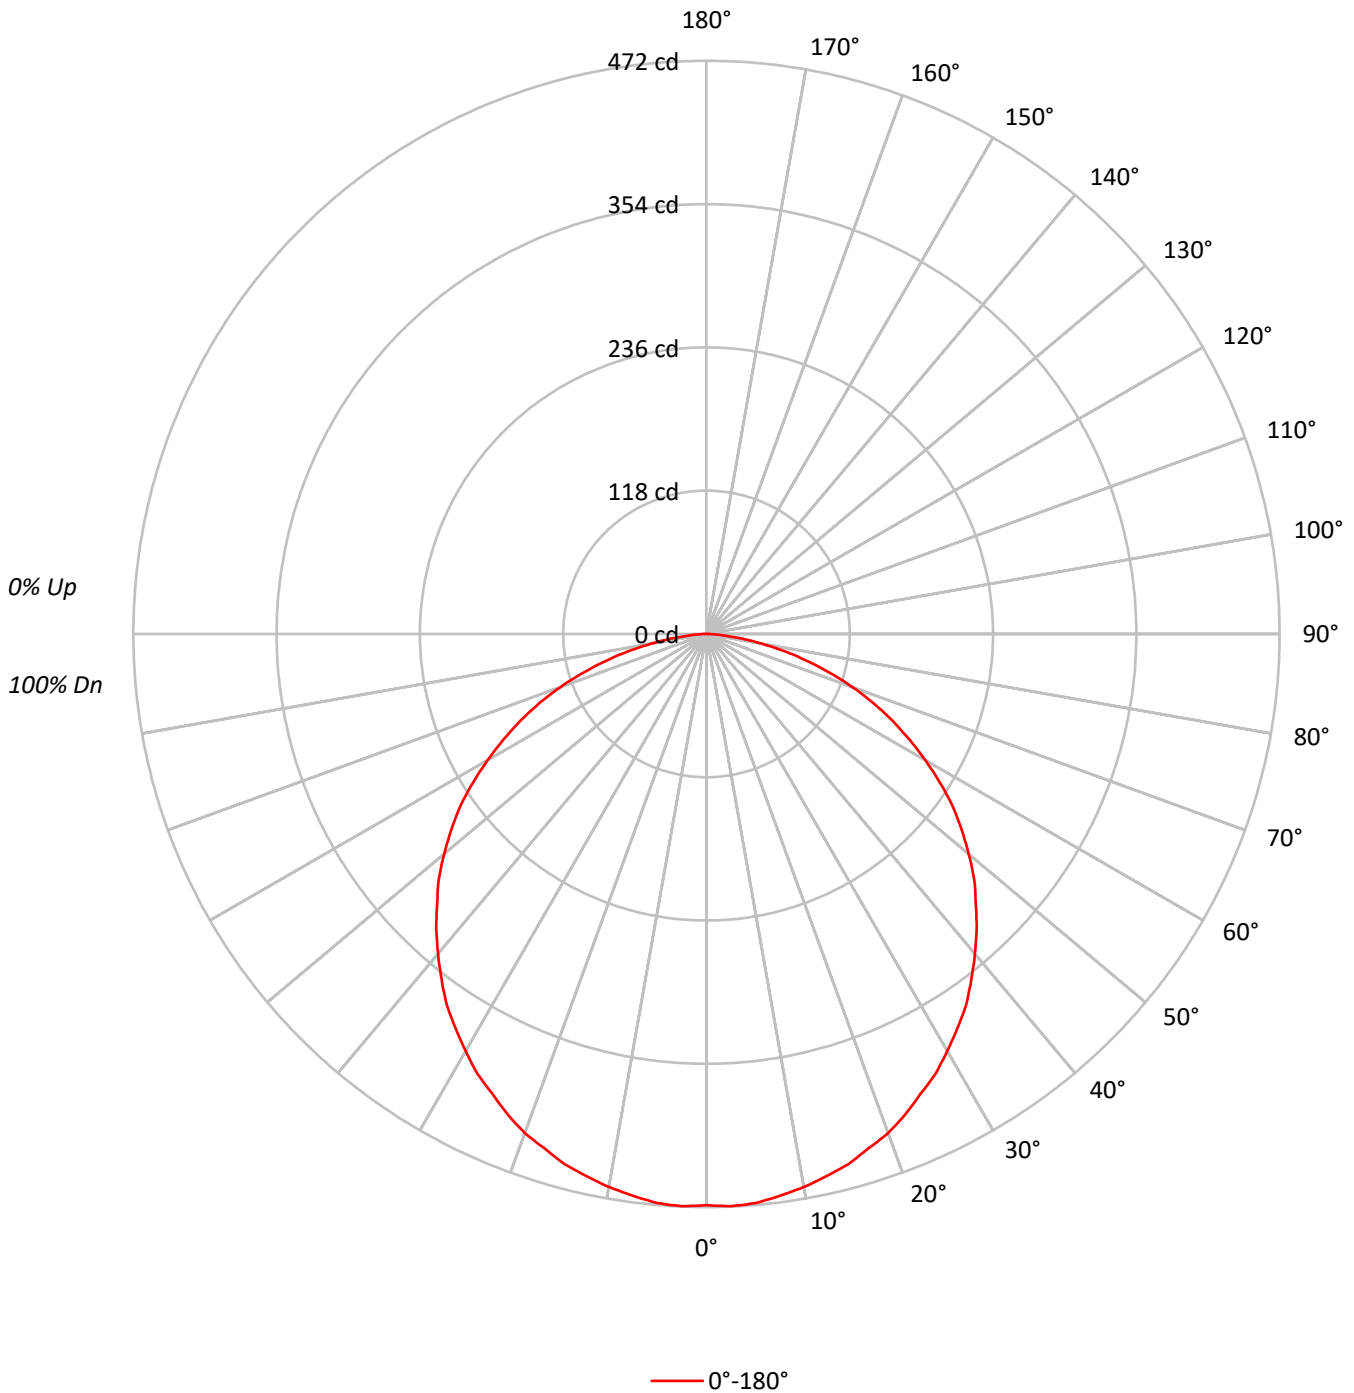



TEST NUMBER: P365523

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-MW-BL89AM

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	109	104	100	96	106	102	98	95	98	94	92		94	91	89		90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	75		82	78	74		79	75	72	70
3	90	80	71	65	88	78	70	64	75	69	63		72	67	62		70	65	61	59
4	82	70	62	55	80	69	61	55	67	59	54		64	58	53		62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46		58	51	46		56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41		52	45	40		51	45	40	38
7	65	51	42	36	63	50	42	36	49	41	36		47	41	36		46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32		43	37	32		42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29		40	33	29		39	33	29	27
10	53	40	32	26	52	39	31	26	38	31	26		37	31	26		36	30	26	24

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	12849
5°	12898
10°	12828
15°	12782
20°	12717
25°	12589
30°	12509
35°	12435
40°	12263
45°	12114
50°	11984
55°	11796
60°	11374
65°	10904
70°	10207
75°	9034
80°	7252
85°	4137



TEST NUMBER: P365523

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-MW-BL89AM

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.6	3.3
10°-20°	127.4	9.5
20°-30°	192.9	14.4
30°-40°	232.8	17.4
40°-50°	242.3	18.1
50°-60°	220.4	16.5
60°-70°	166.8	12.5
70°-80°	91.0	6.8
80°-90°	18.8	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	364.9	27.3
0°-40°	597.7	44.7
0°-60°	1060.5	79.3
0°-90°	1337.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1337.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	470	
5°	470	45
15°	452	127
25°	418	193
35°	373	233
45°	314	242
55°	248	220
65°	169	167
75°	86	91
85°	13	19
90°	0	



TEST NUMBER: P365523

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-MW-BL89AM

CANDELA DISTRIBUTION (FULL):

0°	
0°	470.4
2.5°	471.7
5°	470.4
7.5°	466.5
10°	462.5
12.5°	457.2
15°	452.0
17.5°	444.1
20°	437.5
22.5°	428.2
25°	417.7
27.5°	408.5
30°	396.6
32.5°	384.8
35°	372.9
37.5°	358.4
40°	343.9
42.5°	329.4
45°	313.6
47.5°	299.1
50°	282.0
52.5°	264.8
55°	247.7
57.5°	228.0
60°	208.2
62.5°	188.4
65°	168.7
67.5°	148.9
70°	127.8
72.5°	106.7
75°	85.6
77.5°	65.9
80°	46.1
82.5°	29.0
85°	13.2
87.5°	4.0
90°	0.0

(END OF REPORT)