

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366256

Luminaire Tested: **FLD6BX40D010-FEU6B35-8027-F6LBXVM1-WMH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366256
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-11)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-WMH
Description: VANDAL RESISTANT OPEN, WARM HAZE REFLECTOR, 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3767.0 lumens
Efficiency: N/A
Efficacy: 92.8 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.84
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366256

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-WMH

Luminous Intensity Polar Plot

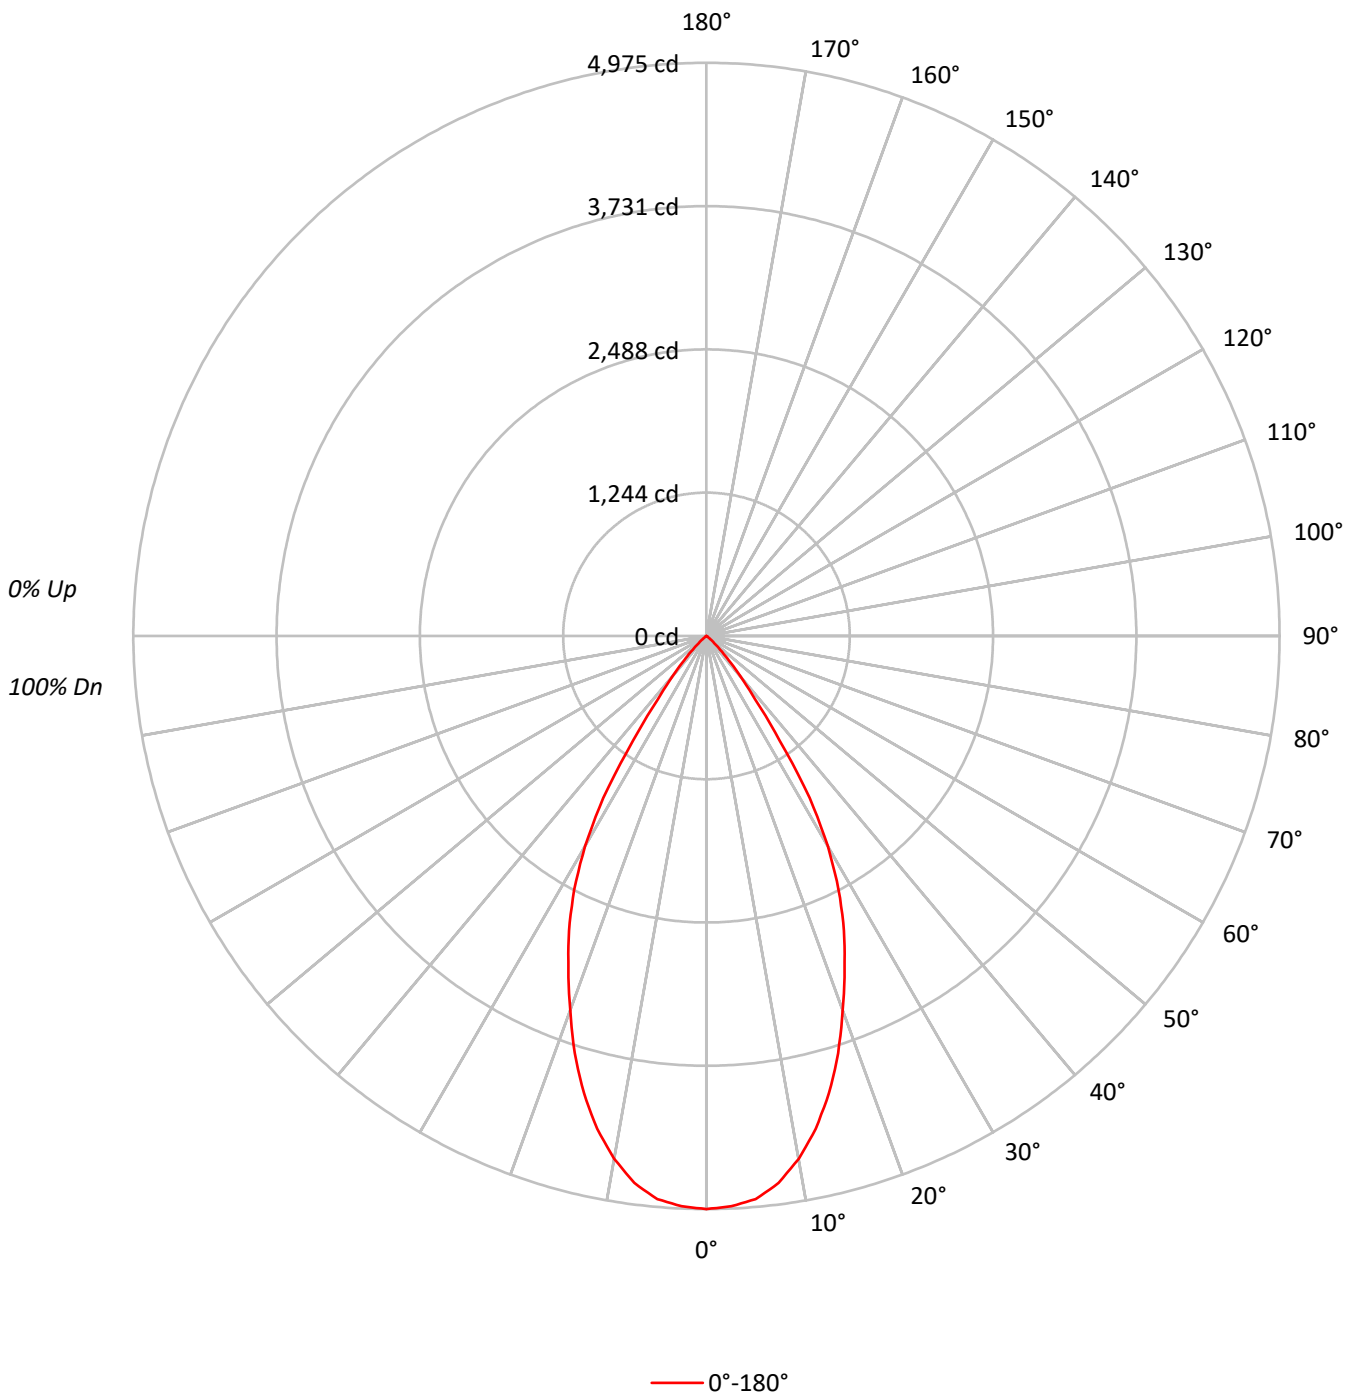



TEST NUMBER: P366256

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87	91	88	85	89	86	84	82
4	98	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77
5	94	86	80	76	92	85	80	76	83	79	75	82	78	75	80	77	74	72
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68
7	85	76	71	67	84	76	70	66	74	70	66	73	69	66	72	68	65	64
8	81	72	66	63	80	72	66	62	71	66	62	70	65	62	69	65	62	60
9	78	68	63	59	77	68	62	59	67	62	59	66	62	58	65	61	58	57
10	74	65	59	56	73	64	59	56	64	59	55	63	58	55	62	58	55	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	135899
5°	134540
10°	127802
15°	116181
20°	100509
25°	85116
30°	66432
35°	36984
40°	16203
45°	6513
50°	1793
55°	314
60°	219
65°	168
70°	104
75°	137
80°	0
85°	0



TEST NUMBER: P366256

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	458.7	12.2
10°-20°	1139.9	30.3
20°-30°	1280.5	34.0
30°-40°	724.5	19.2
40°-50°	149.4	4.0
50°-60°	10.8	0.3
60°-70°	2.3	0.1
70°-80°	0.9	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2879.2	76.4
0°-40°	3603.7	95.7
0°-60°	3763.9	99.9
0°-90°	3767.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3767.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4975	
5°	4907	459
15°	4108	1140
25°	2824	1281
35°	1109	725
45°	169	149
55°	7	11
65°	3	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P366256

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8027-F6LBXVM1-WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	4975.2
2.5°	4954.1
5°	4906.7
7.5°	4789.4
10°	4607.7
12.5°	4381.1
15°	4108.4
17.5°	3798.9
20°	3457.7
22.5°	3131.0
25°	2824.1
27.5°	2484.3
30°	2106.2
32.5°	1666.3
35°	1109.1
37.5°	695.5
40°	454.4
42.5°	287.2
45°	168.6
47.5°	89.6
50°	42.2
52.5°	14.5
55°	6.6
57.5°	5.3
60°	4.0
62.5°	2.6
65°	2.6
67.5°	1.3
70°	1.3
72.5°	1.3
75°	1.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)