

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365541

Luminaire Tested: **FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BL89AM**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365541
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-40)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BL89AM
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, OPAL SMOOTH 0.125", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1396.9 lumens
Efficiency: N/A
Efficacy: 34.4 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.37
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365541

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BL89AM

Luminous Intensity Polar Plot

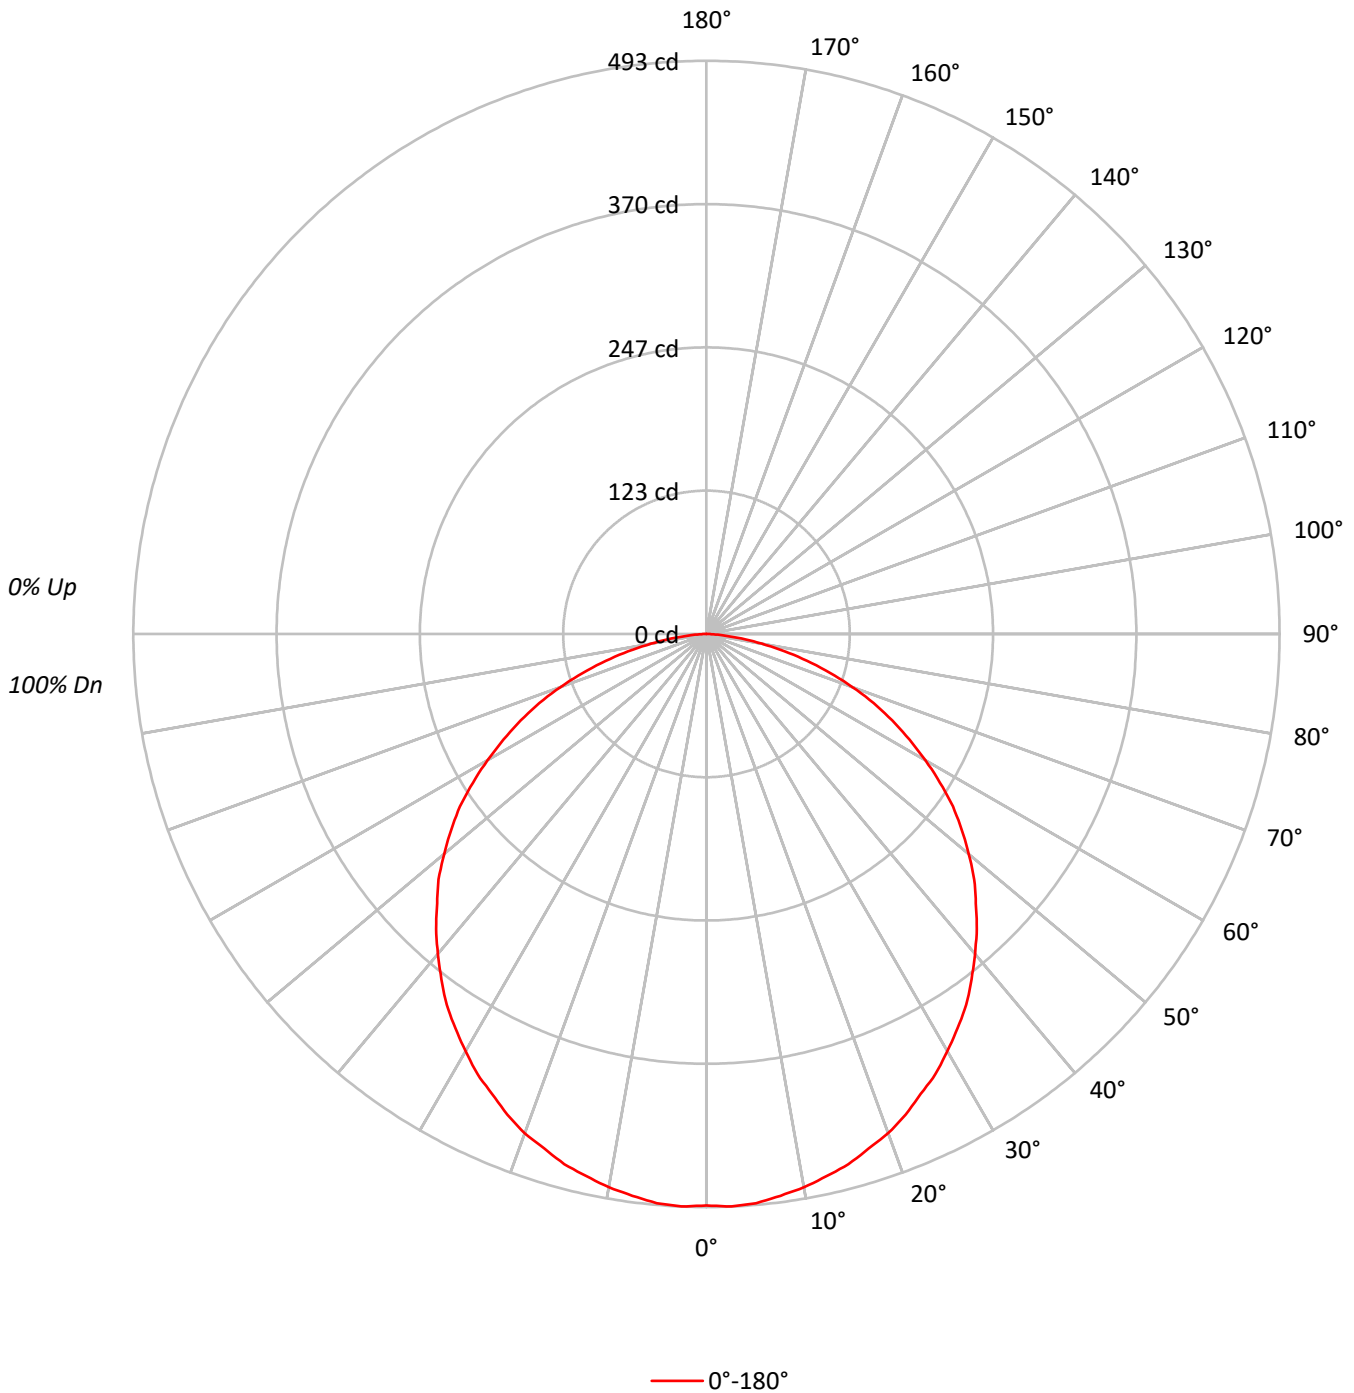



TEST NUMBER: P365541

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BL89AM

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	109	104	100	96	106	102	98	95	98	94	92		94	91	89		90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	75		82	78	74		79	75	72	70
3	90	80	71	65	88	78	70	64	75	69	63		72	67	62		70	65	61	59
4	82	70	62	55	80	69	61	55	67	59	54		64	58	53		62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46		58	51	46		56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41		52	45	40		51	45	40	38
7	65	51	42	36	63	50	42	36	49	41	36		47	41	36		46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32		43	37	32		42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29		40	33	29		39	33	29	27
10	53	40	32	26	52	39	31	26	38	31	26		37	31	26		36	30	26	24

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	13425
5°	13477
10°	13405
15°	13353
20°	13287
25°	13153
30°	13071
35°	12992
40°	12812
45°	12659
50°	12519
55°	12325
60°	11882
65°	11388
70°	10662
75°	9446
80°	7582
85°	4325



TEST NUMBER: P365541

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BL89AM

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.6	3.3
10°-20°	133.1	9.5
20°-30°	201.5	14.4
30°-40°	243.2	17.4
40°-50°	253.2	18.1
50°-60°	230.3	16.5
60°-70°	174.2	12.5
70°-80°	95.1	6.8
80°-90°	19.7	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	381.3	27.3
0°-40°	624.5	44.7
0°-60°	1108.0	79.3
0°-90°	1396.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1396.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	492	
5°	492	47
15°	472	133
25°	436	202
35°	390	243
45°	328	253
55°	259	230
65°	176	174
75°	90	95
85°	14	20
90°	0	



TEST NUMBER: P365541

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BL89AM

CANDELA DISTRIBUTION (FULL):

0°	
0°	491.5
2.5°	492.9
5°	491.5
7.5°	487.4
10°	483.3
12.5°	477.7
15°	472.2
17.5°	464.0
20°	457.1
22.5°	447.5
25°	436.4
27.5°	426.8
30°	414.4
32.5°	402.0
35°	389.6
37.5°	374.5
40°	359.3
42.5°	344.2
45°	327.7
47.5°	312.5
50°	294.6
52.5°	276.7
55°	258.8
57.5°	238.2
60°	217.5
62.5°	196.9
65°	176.2
67.5°	155.6
70°	133.5
72.5°	111.5
75°	89.5
77.5°	68.8
80°	48.2
82.5°	30.3
85°	13.8
87.5°	4.1
90°	0.0

(END OF REPORT)