

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365549

Luminaire Tested: **FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BTR86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365549
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-17)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BTR86
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.250", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2353.0 lumens
Efficiency: N/A
Efficacy: 58.0 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.83
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365549

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BTR86

Luminous Intensity Polar Plot

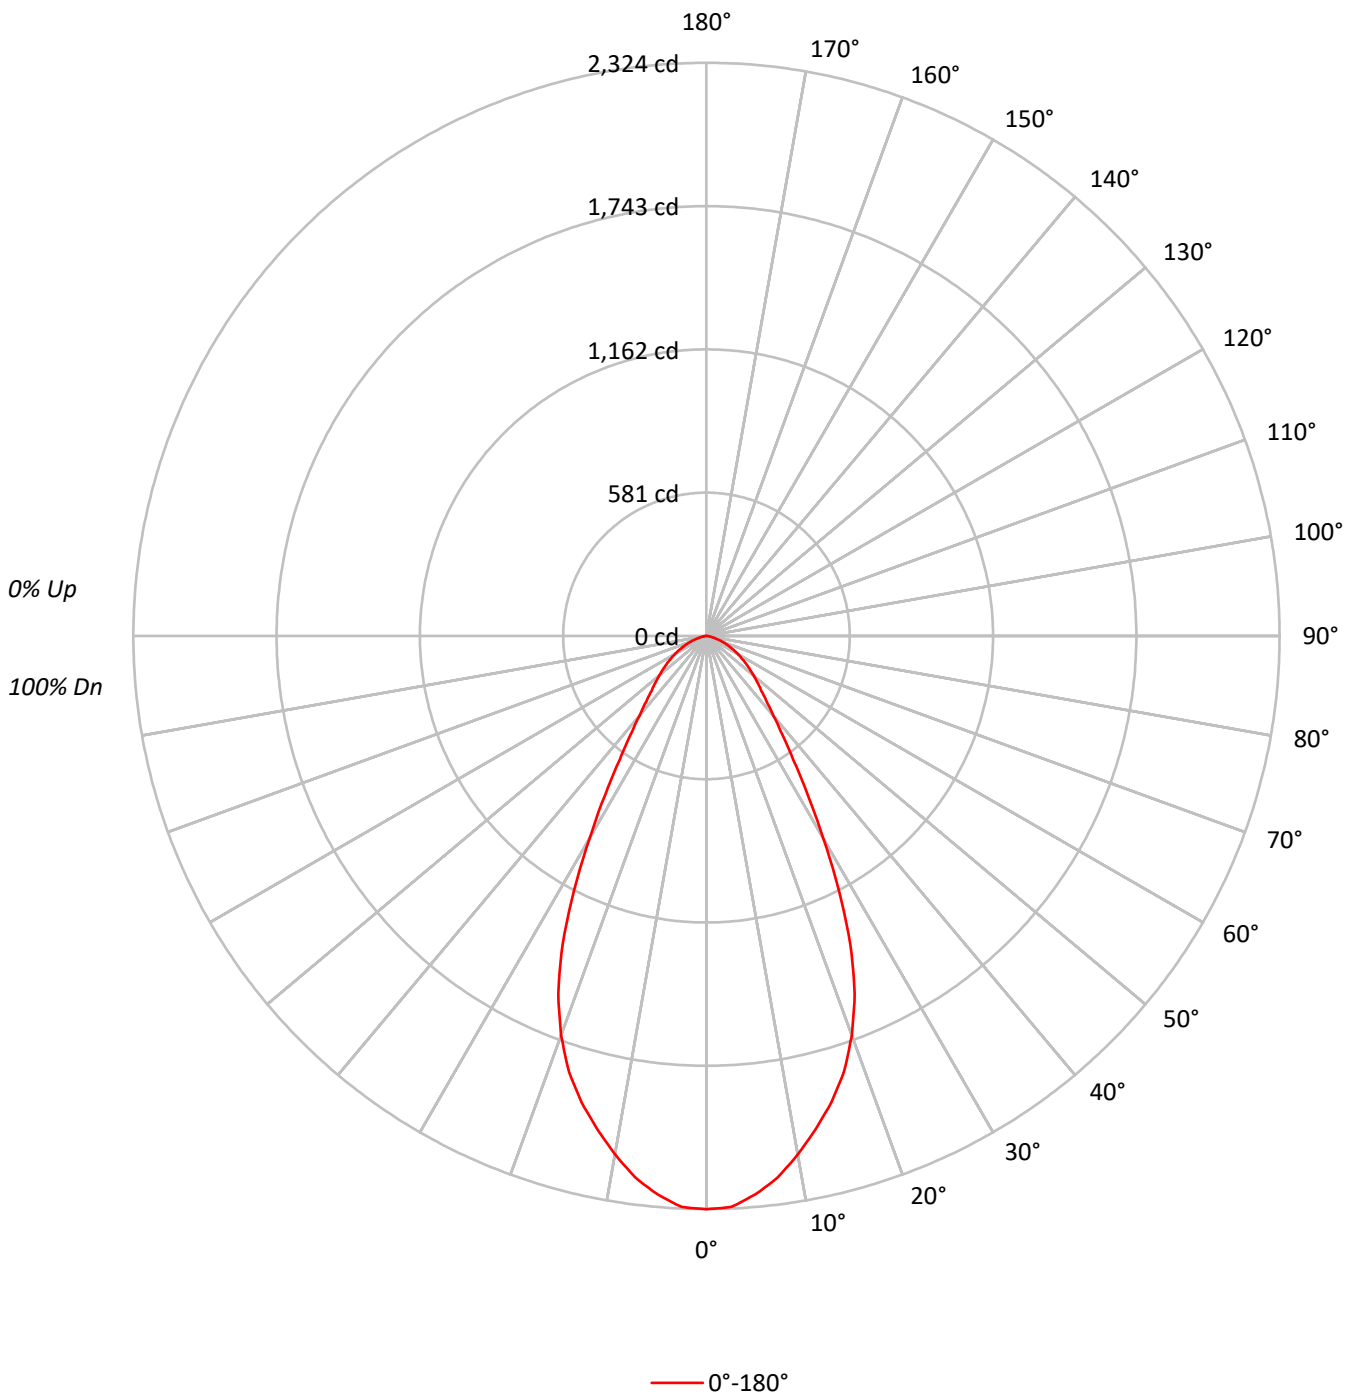



TEST NUMBER: P365549

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BTR86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	98	93	89	94	91	87		91	88	85		88	86	84	82
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82	79	76	74
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	72	69	68
5	87	78	71	66	86	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67	62	59	57
7	78	67	60	56	76	66	60	55	65	59	55		64	59	55		63	58	54	53
8	74	63	56	51	72	62	56	51	61	55	51		60	55	51		59	54	51	49
9	70	59	52	48	69	59	52	48	58	52	48		57	51	48		56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45		53	48	45		53	48	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	166439
5°	163409
10°	155192
15°	145053
20°	131265
25°	109010
30°	78214
35°	53687
40°	39519
45°	31927
50°	27759
55°	24405
60°	21094
65°	17959
70°	14131
75°	9904
80°	6226
85°	6819



TEST NUMBER: P365549

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BTR86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	212.7	9.0
10°-20°	546.0	23.2
20°-30°	619.3	26.3
30°-40°	397.0	16.9
40°-50°	248.8	10.6
50°-60°	175.5	7.5
60°-70°	105.4	4.5
70°-80°	40.2	1.7
80°-90°	8.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1378.0	58.6
0°-40°	1775.0	75.4
0°-60°	2199.3	93.5
0°-90°	2353.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2353.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2324	
5°	2274	213
15°	1957	546
25°	1380	619
35°	614	397
45°	315	249
55°	196	175
65°	106	105
75°	36	40
85°	8	8
90°	0	



TEST NUMBER: P365549

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8030-F6LBXVM1-MW-BTR86

CANDELA DISTRIBUTION (FULL):

0°	
0°	2324.5
2.5°	2317.6
5°	2273.5
7.5°	2214.3
10°	2134.5
12.5°	2047.7
15°	1956.8
17.5°	1853.5
20°	1722.7
22.5°	1569.9
25°	1379.8
27.5°	1160.9
30°	946.0
32.5°	764.3
35°	614.2
37.5°	505.4
40°	422.8
42.5°	362.2
45°	315.3
47.5°	280.9
50°	249.2
52.5°	221.7
55°	195.5
57.5°	170.8
60°	147.3
62.5°	126.7
65°	106.0
67.5°	86.8
70°	67.5
72.5°	51.0
75°	35.8
77.5°	24.8
80°	15.1
82.5°	9.6
85°	8.3
87.5°	4.1
90°	0.0

(END OF REPORT)