

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364843

Luminaire Tested: **FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI-BTR81**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364843
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-25)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI-BTR81
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3097.0 lumens
Efficiency: N/A
Efficacy: 76.3 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.19
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364843

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI-BTR81

Luminous Intensity Polar Plot

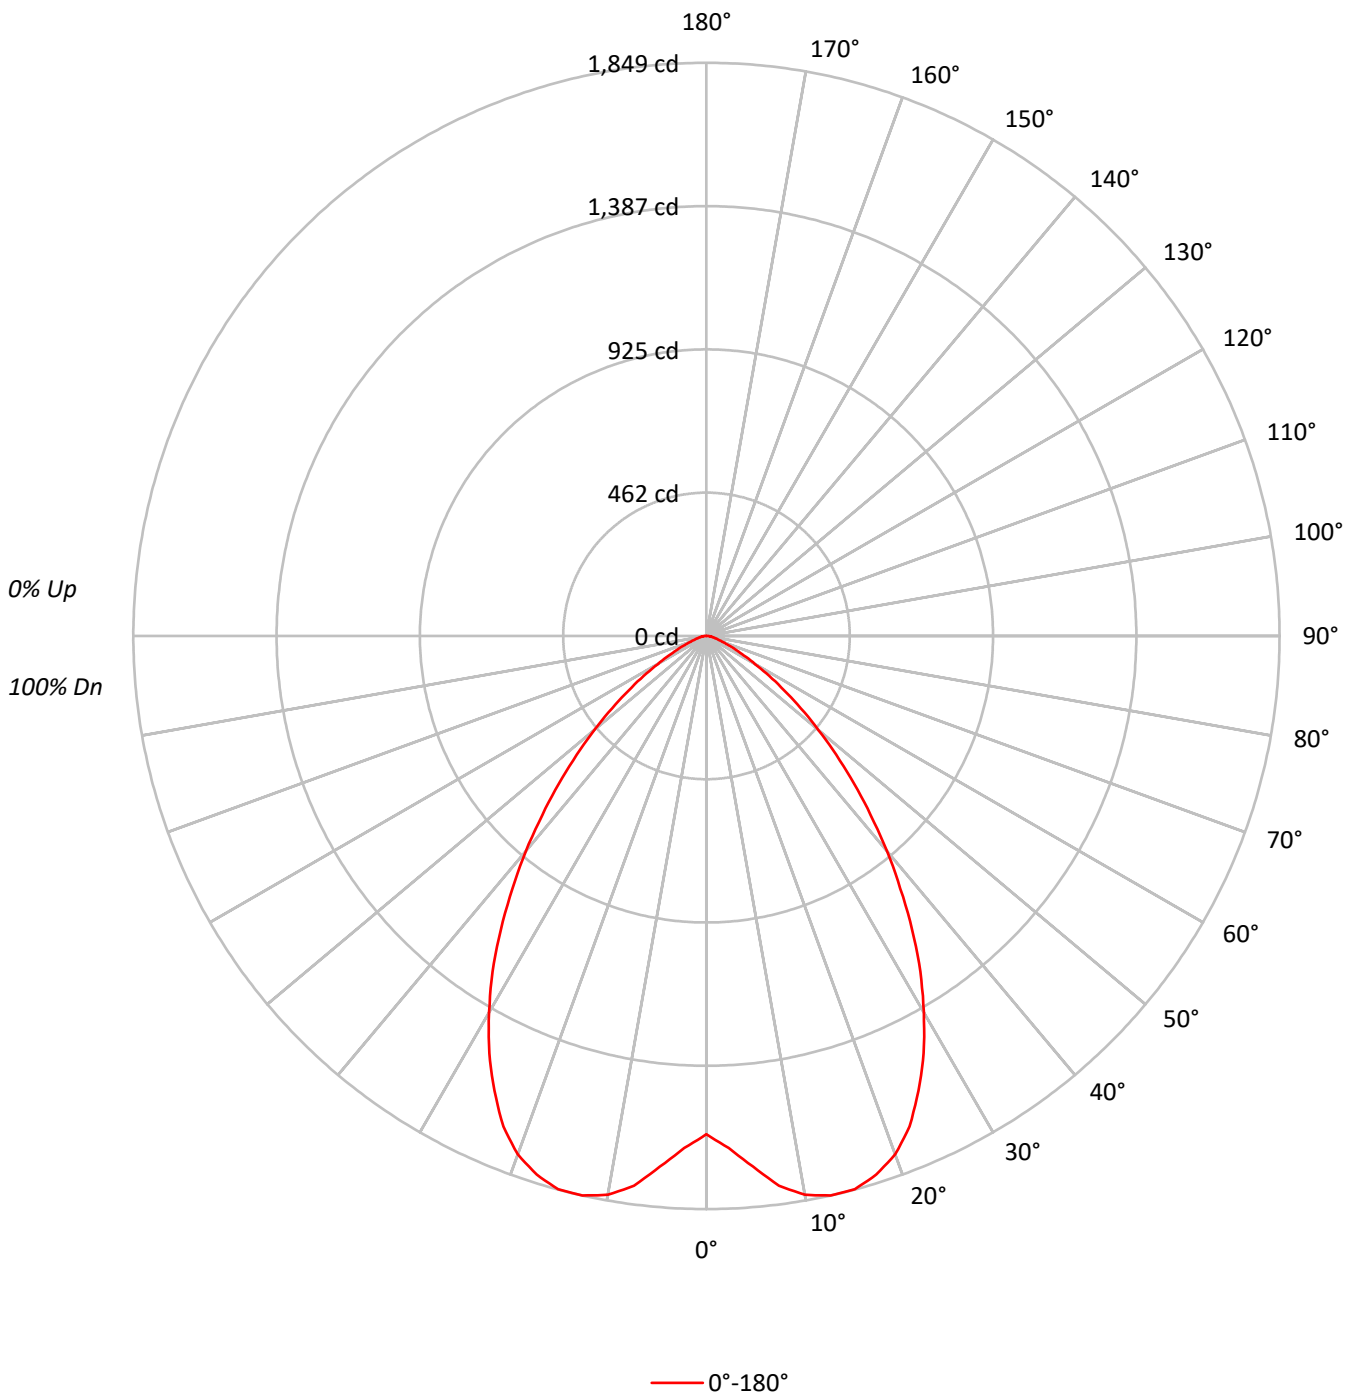



TEST NUMBER: P364843

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI-BTR81

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		82	78	75		80	76	73	72
4	91	81	74	69	89	80	73	68	78	72	68		75	71	67		73	69	66	64
5	85	74	67	61	83	73	66	61	71	65	61		69	64	60		68	63	59	58
6	79	68	61	55	77	67	60	55	66	59	55		64	59	54		63	58	54	52
7	74	63	55	50	73	62	55	50	61	54	50		59	54	49		58	53	49	47
8	70	58	51	46	68	57	50	46	56	50	45		55	49	45		54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	42		51	46	41		50	45	41	40
10	62	50	43	39	61	50	43	38	49	43	38		48	42	38		47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	115100
5°	123511
10°	133104
15°	136958
20°	135646
25°	127884
30°	115957
35°	101116
40°	84768
45°	68239
50°	52544
55°	38212
60°	25934
65°	17129
70°	11158
75°	8548
80°	7546
85°	9201



TEST NUMBER: P364843

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI-BTR81

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.8	5.4
10°-20°	518.3	16.7
20°-30°	740.1	23.9
30°-40°	720.0	23.2
40°-50°	520.8	16.8
50°-60°	279.2	9.0
60°-70°	105.3	3.4
70°-80°	34.6	1.1
80°-90°	10.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1426.2	46.1
0°-40°	2146.2	69.3
0°-60°	2946.2	95.1
0°-90°	3097.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3097.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1608	
5°	1718	168
15°	1848	518
25°	1619	740
35°	1157	720
45°	674	521
55°	306	279
65°	101	105
75°	31	35
85°	11	11
90°	0	



TEST NUMBER: P364843

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI-BTR81

CANDELA DISTRIBUTION (FULL):

0°	
0°	1607.5
2.5°	1653.8
5°	1718.4
7.5°	1788.6
10°	1830.7
12.5°	1849.0
15°	1847.6
17.5°	1822.3
20°	1780.2
22.5°	1712.8
25°	1618.7
27.5°	1517.7
30°	1402.5
32.5°	1284.6
35°	1156.8
37.5°	1027.7
40°	906.9
42.5°	783.4
45°	673.9
47.5°	567.2
50°	471.7
52.5°	383.3
55°	306.1
57.5°	240.1
60°	181.1
62.5°	136.2
65°	101.1
67.5°	73.0
70°	53.3
72.5°	40.7
75°	30.9
77.5°	23.9
80°	18.3
82.5°	14.0
85°	11.2
87.5°	5.6
90°	0.0

(END OF REPORT)