

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364852

Luminaire Tested: **FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P364852  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI  
Description: VANDAL RESISTANT OPEN, SPECULAR CLEAR REFLECTOR, 4000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4117.0 lumens  
Efficiency: N/A  
Efficacy: 101.4 lumens/watt  
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.81  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
CIE Type: Direct


Input Watts (W): 40.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P364852

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI

### Luminous Intensity Polar Plot

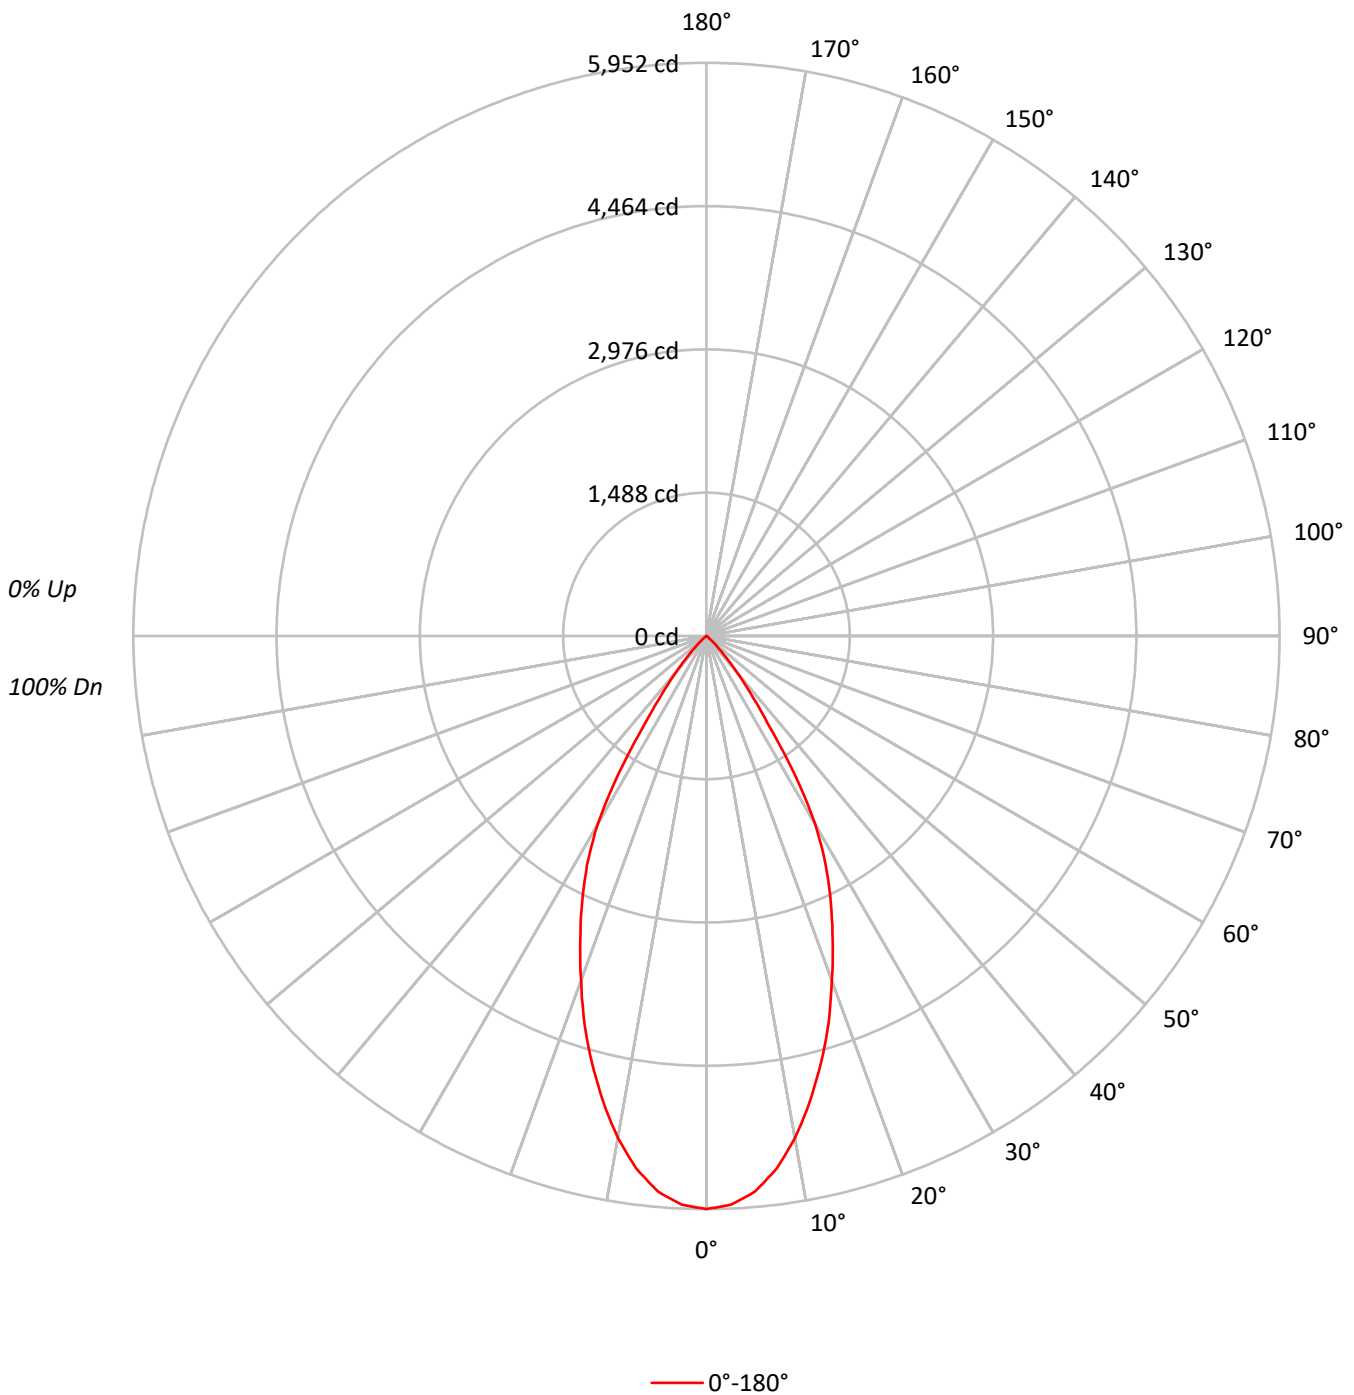



TEST NUMBER: P364852

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	88	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	88	84	81	87	83	80	85	82	79	78
5	94	86	81	77	93	85	80	76	84	79	76	82	78	75	81	77	75	73
6	90	81	76	72	88	81	75	72	79	75	71	78	74	71	77	73	70	69
7	86	77	71	67	84	76	71	67	75	70	67	74	70	66	73	69	66	65
8	82	73	67	63	81	72	67	63	71	66	63	70	66	63	69	65	62	61
9	78	69	64	60	77	69	63	60	68	63	60	67	62	59	66	62	59	58
10	75	66	60	57	74	65	60	56	64	60	56	64	59	56	63	59	56	55

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	162567
5°	158836
10°	146841
15°	129851
20°	110692
25°	92078
30°	71418
35°	37097
40°	17230
45°	6513
50°	1432
55°	200
60°	76
65°	90
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P364852

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	536.8	13.0
10°-20°	1276.4	31.0
20°-30°	1391.2	33.8
30°-40°	752.2	18.3
40°-50°	152.0	3.7
50°-60°	7.2	0.2
60°-70°	1.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3204.4	77.8
0°-40°	3956.6	96.1
0°-60°	4115.8	100.0
0°-90°	4117.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4117.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5952	
5°	5793	537
15°	4592	1276
25°	3055	1391
35°	1112	752
45°	169	152
55°	4	7
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P364852

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5951.5
2.5°	5912.2
5°	5792.8
7.5°	5577.9
10°	5294.1
12.5°	4955.6
15°	4591.8
17.5°	4215.4
20°	3808.0
22.5°	3424.5
25°	3055.1
27.5°	2684.3
30°	2264.3
32.5°	1703.8
35°	1112.5
37.5°	743.1
40°	483.2
42.5°	297.8
45°	168.6
47.5°	84.3
50°	33.7
52.5°	8.4
55°	4.2
57.5°	2.8
60°	1.4
62.5°	1.4
65°	1.4
67.5°	1.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)