

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365564

Luminaire Tested: **FLD6BX40D010-FEU6B35-8035-F6LBXVM1-MW-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365564
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-20)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-MW-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2267.0 lumens
Efficiency: N/A
Efficacy: 55.8 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.09
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365564

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-MW-BTR82

Luminous Intensity Polar Plot

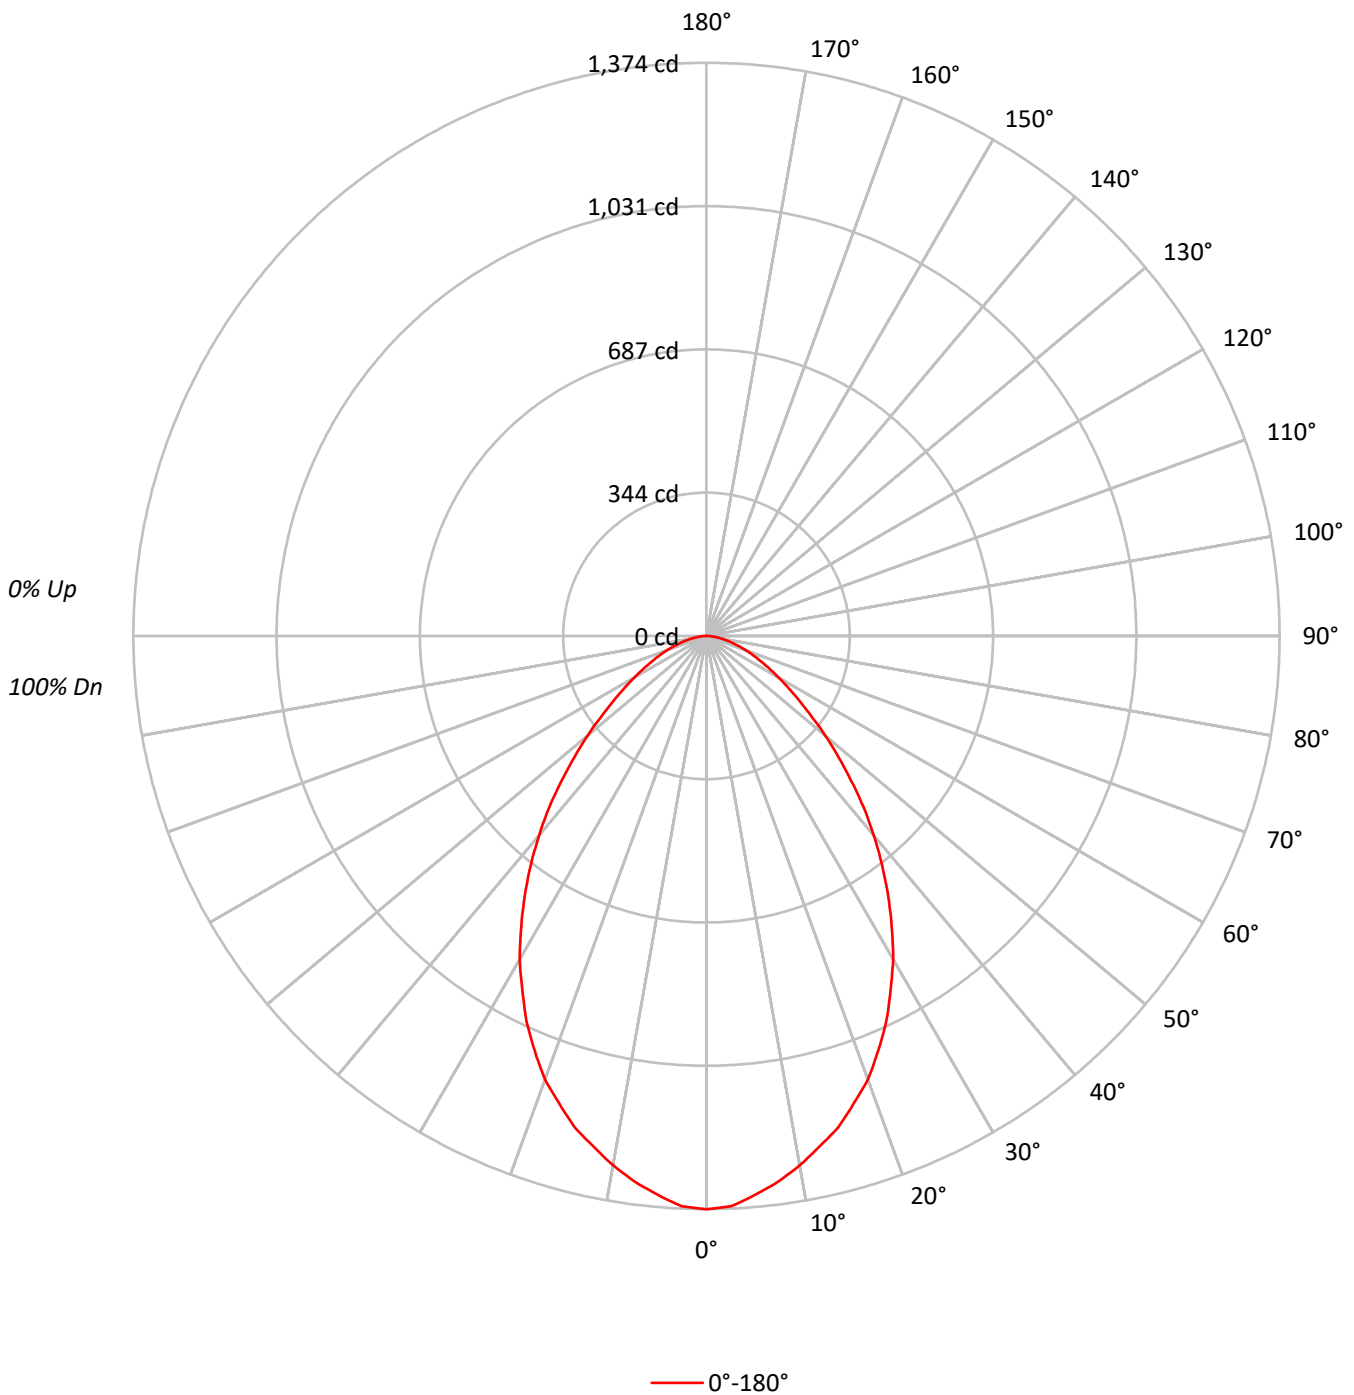



TEST NUMBER: P365564

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-MW-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	111	107	104	100	108	105	102	99	101	98	96		97	95	93		93	92	90	88
2	103	96	90	86	100	94	89	85	91	86	83		88	84	81		85	82	79	77
3	95	86	79	74	93	85	78	73	82	77	72		79	75	71		77	73	70	68
4	88	78	71	65	86	77	70	64	74	68	64		72	67	63		70	66	62	60
5	82	71	63	58	80	70	63	57	68	62	57		66	61	56		64	59	56	54
6	77	65	57	52	75	64	57	51	62	56	51		61	55	50		59	54	50	48
7	72	60	52	46	70	59	52	46	57	51	46		56	50	46		55	50	45	44
8	67	55	47	42	66	54	47	42	53	47	42		52	46	42		51	46	41	40
9	63	51	44	39	62	51	43	39	49	43	38		48	42	38		47	42	38	36
10	60	48	40	36	58	47	40	36	46	40	35		45	39	35		44	39	35	34

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	98410
5°	96665
10°	93690
15°	90421
20°	86202
25°	80600
30°	74014
35°	66335
40°	58316
45°	49658
50°	41483
55°	34030
60°	28583
65°	24279
70°	21186
75°	17871
80°	14473
85°	11584



TEST NUMBER: P365564

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-MW-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.7	5.6
10°-20°	342.0	15.1
20°-30°	467.2	20.6
30°-40°	473.5	20.9
40°-50°	379.7	16.7
50°-60°	247.4	10.9
60°-70°	144.4	6.4
70°-80°	69.4	3.1
80°-90°	16.6	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	935.9	41.3
0°-40°	1409.4	62.2
0°-60°	2036.5	89.8
0°-90°	2267.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2267.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1374	
5°	1345	127
15°	1220	342
25°	1020	467
35°	759	474
45°	490	380
55°	273	247
65°	143	144
75°	65	69
85°	14	17
90°	0	



TEST NUMBER: P365564

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8035-F6LBXVM1-MW-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	1374.4
2.5°	1368.7
5°	1344.9
7.5°	1319.6
10°	1288.6
12.5°	1253.5
15°	1219.8
17.5°	1174.8
20°	1131.3
22.5°	1076.4
25°	1020.2
27.5°	955.6
30°	895.2
32.5°	826.3
35°	758.9
37.5°	691.4
40°	623.9
42.5°	557.9
45°	490.4
47.5°	428.6
50°	372.4
52.5°	317.6
55°	272.6
57.5°	233.3
60°	199.6
62.5°	170.0
65°	143.3
67.5°	120.9
70°	101.2
72.5°	81.5
75°	64.6
77.5°	49.2
80°	35.1
82.5°	23.9
85°	14.1
87.5°	5.6
90°	0.0

(END OF REPORT)