

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364862

Luminaire Tested: **FLD6BX40D010-FEU6B35-8040-F6LBXVM1-LI-BTR82**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P364862  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-26)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-LI-BTR82  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 4000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3100.0 lumens  
Efficiency: N/A  
Efficacy: 76.4 lumens/watt  
Spacing Criteria (0/90/45): 1.07 / 1.07 / 1.07  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 40.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P364862

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-LI-BTR82

### Luminous Intensity Polar Plot

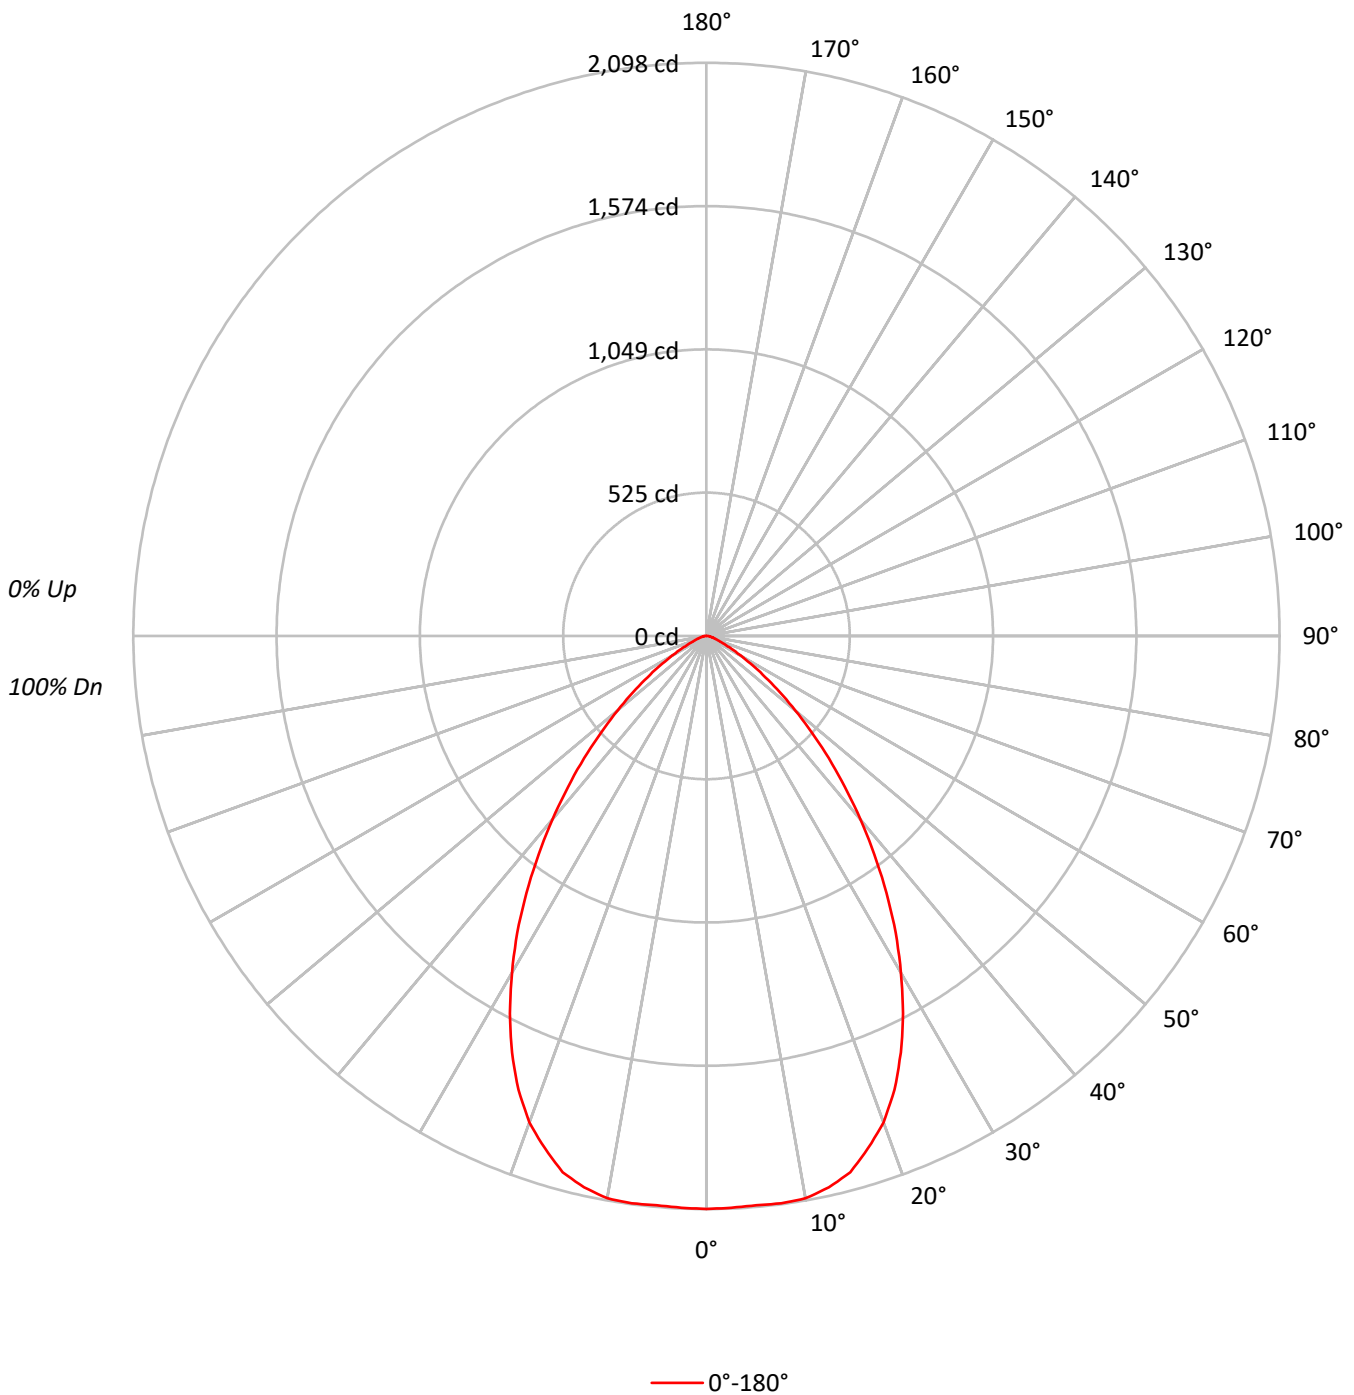



TEST NUMBER: P364862

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-LI-BTR82

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73
4	92	83	76	71	90	81	75	70	79	74	69	77	72	69	75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	69	65	61	60
6	81	70	63	57	79	69	62	57	67	61	57	66	60	56	64	60	56	54
7	76	65	57	52	74	64	57	52	62	56	52	61	56	52	60	55	51	50
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	46
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	43	42
10	63	52	45	41	62	52	45	41	51	45	41	50	44	40	49	44	40	39

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	150192
5°	150356
10°	151993
15°	150650
20°	144371
25°	132979
30°	117693
35°	100355
40°	81982
45°	64098
50°	47264
55°	32781
60°	20936
65°	12741
70°	8625
75°	6667
80°	5855
85°	8133



TEST NUMBER: P364862

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-LI-BTR82

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	199.8	6.4
10°-20°	568.3	18.3
20°-30°	768.7	24.8
30°-40°	715.1	23.1
40°-50°	489.9	15.8
50°-60°	241.4	7.8
60°-70°	80.7	2.6
70°-80°	26.7	0.9
80°-90°	9.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1536.8	49.6
0°-40°	2251.9	72.6
0°-60°	2983.3	96.2
0°-90°	3100.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3100.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2098	
5°	2092	200
15°	2032	568
25°	1683	769
35°	1148	715
45°	633	490
55°	263	241
65°	75	81
75°	24	27
85°	10	9
90°	0	



TEST NUMBER: P364862

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-LI-BTR82

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2097.6
2.5°	2094.8
5°	2091.9
7.5°	2094.8
10°	2090.5
12.5°	2067.8
15°	2032.3
17.5°	1967.0
20°	1894.7
22.5°	1798.1
25°	1683.2
27.5°	1558.3
30°	1423.5
32.5°	1288.6
35°	1148.1
37.5°	1009.1
40°	877.1
42.5°	749.3
45°	633.0
47.5°	522.3
50°	424.3
52.5°	339.2
55°	262.6
57.5°	200.1
60°	146.2
62.5°	105.0
65°	75.2
67.5°	53.9
70°	41.2
72.5°	31.2
75°	24.1
77.5°	18.4
80°	14.2
82.5°	11.4
85°	9.9
87.5°	5.7
90°	0.0

(END OF REPORT)