

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366302

Luminaire Tested: **FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366302
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-32)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3049.0 lumens
Efficiency: N/A
Efficacy: 75.1 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.07
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366302

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR82

Luminous Intensity Polar Plot

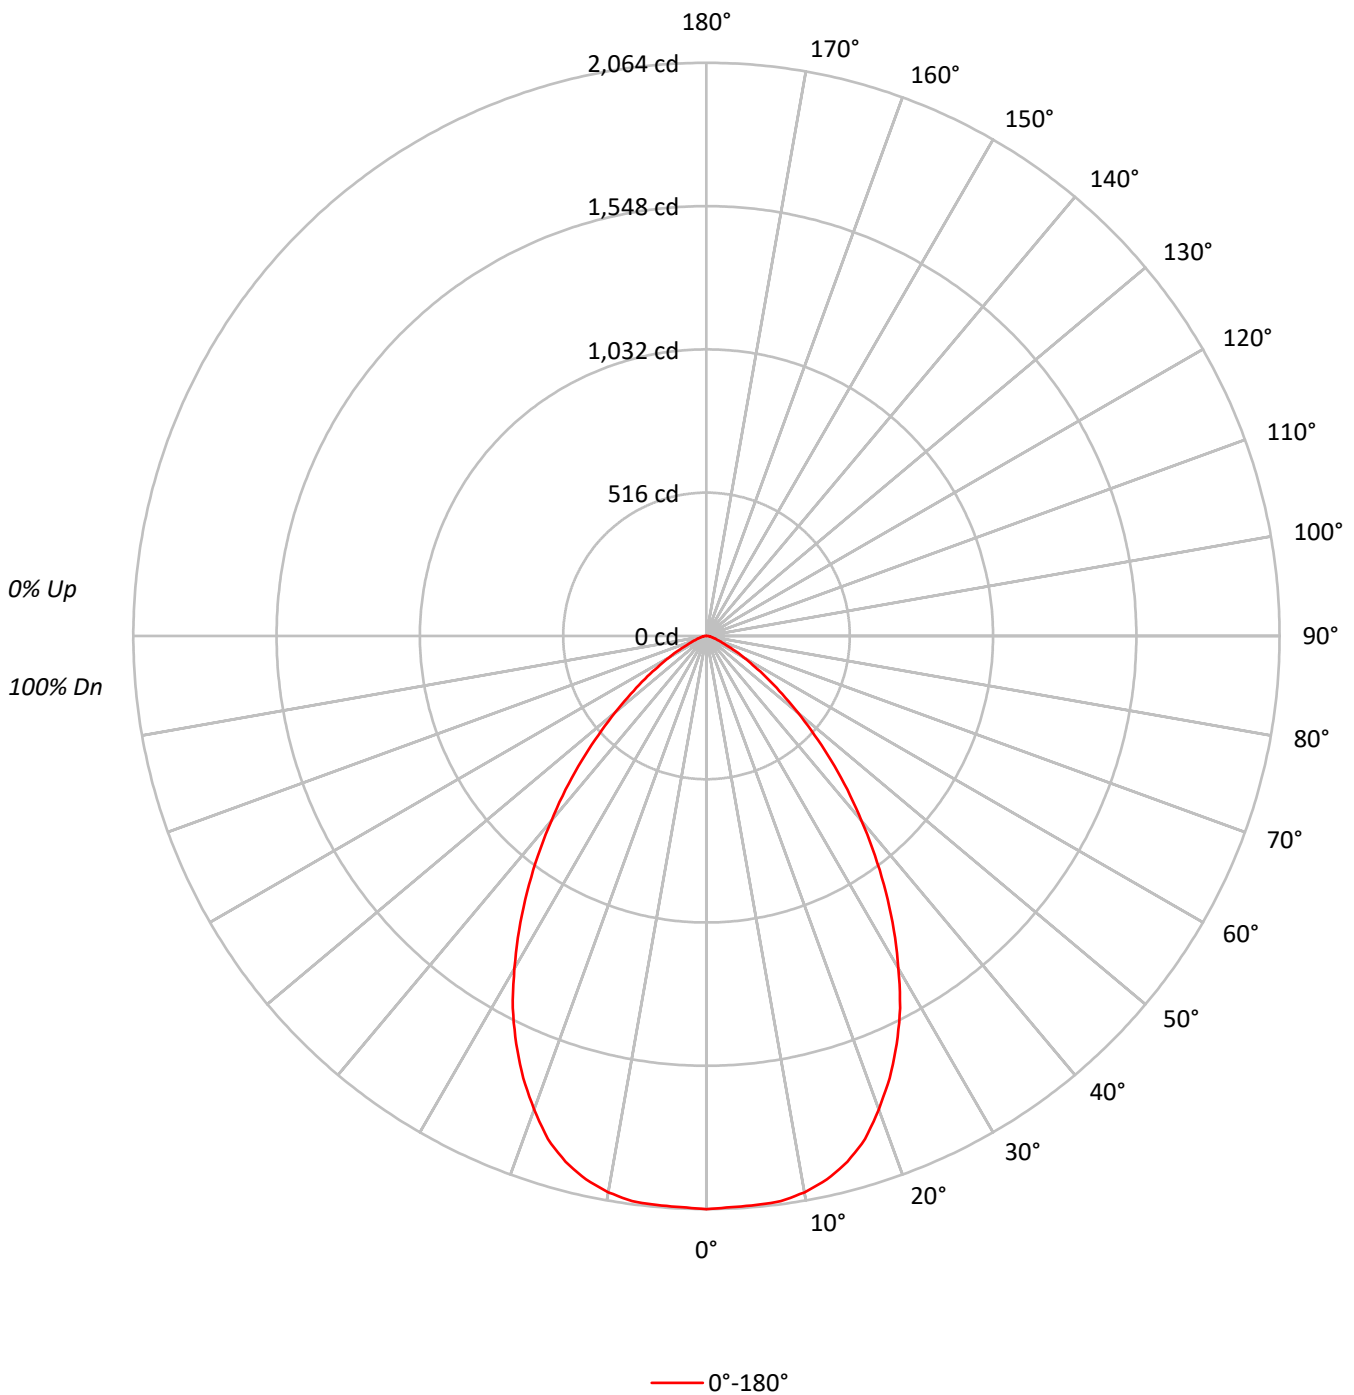



TEST NUMBER: P366302

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	106	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	60	52	47	69	59	52	47	58	52	47	57	51	47	55	50	47	45
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	147815
5°	147869
10°	147928
15°	145350
20°	138260
25°	128097
30°	114336
35°	98415
40°	81216
45°	64270
50°	47765
55°	33680
60°	22368
65°	13706
70°	8918
75°	6667
80°	5855
85°	6983



TEST NUMBER: P366302

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.8	6.4
10°-20°	548.9	18.0
20°-30°	741.1	24.3
30°-40°	701.2	23.0
40°-50°	491.5	16.1
50°-60°	247.3	8.1
60°-70°	87.4	2.9
70°-80°	27.3	0.9
80°-90°	8.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1485.8	48.7
0°-40°	2187.0	71.7
0°-60°	2925.8	96.0
0°-90°	3049.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3049.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2064	
5°	2057	196
15°	1961	549
25°	1621	741
35°	1126	701
45°	635	492
55°	270	247
65°	81	87
75°	24	27
85°	8	9
90°	0	



TEST NUMBER: P366302

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR82

CANDELA DISTRIBUTION (FULL):

0°	
0°	2064.4
2.5°	2058.7
5°	2057.3
7.5°	2053.1
10°	2034.6
12.5°	2004.8
15°	1960.8
17.5°	1899.7
20°	1814.5
22.5°	1723.7
25°	1621.4
27.5°	1510.7
30°	1382.9
32.5°	1256.5
35°	1125.9
37.5°	996.7
40°	868.9
42.5°	751.1
45°	634.7
47.5°	528.2
50°	428.8
52.5°	343.6
55°	269.8
57.5°	207.3
60°	156.2
62.5°	115.0
65°	80.9
67.5°	59.6
70°	42.6
72.5°	32.7
75°	24.1
77.5°	18.5
80°	14.2
82.5°	11.4
85°	8.5
87.5°	4.3
90°	0.0

(END OF REPORT)