

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366307

Luminaire Tested: **FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR89BI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366307
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-28)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR89BI
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM ACRYLIC, CLEAR RFI 0.125", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3052.0 lumens
Efficiency: N/A
Efficacy: 75.2 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366307

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR89BI

Luminous Intensity Polar Plot

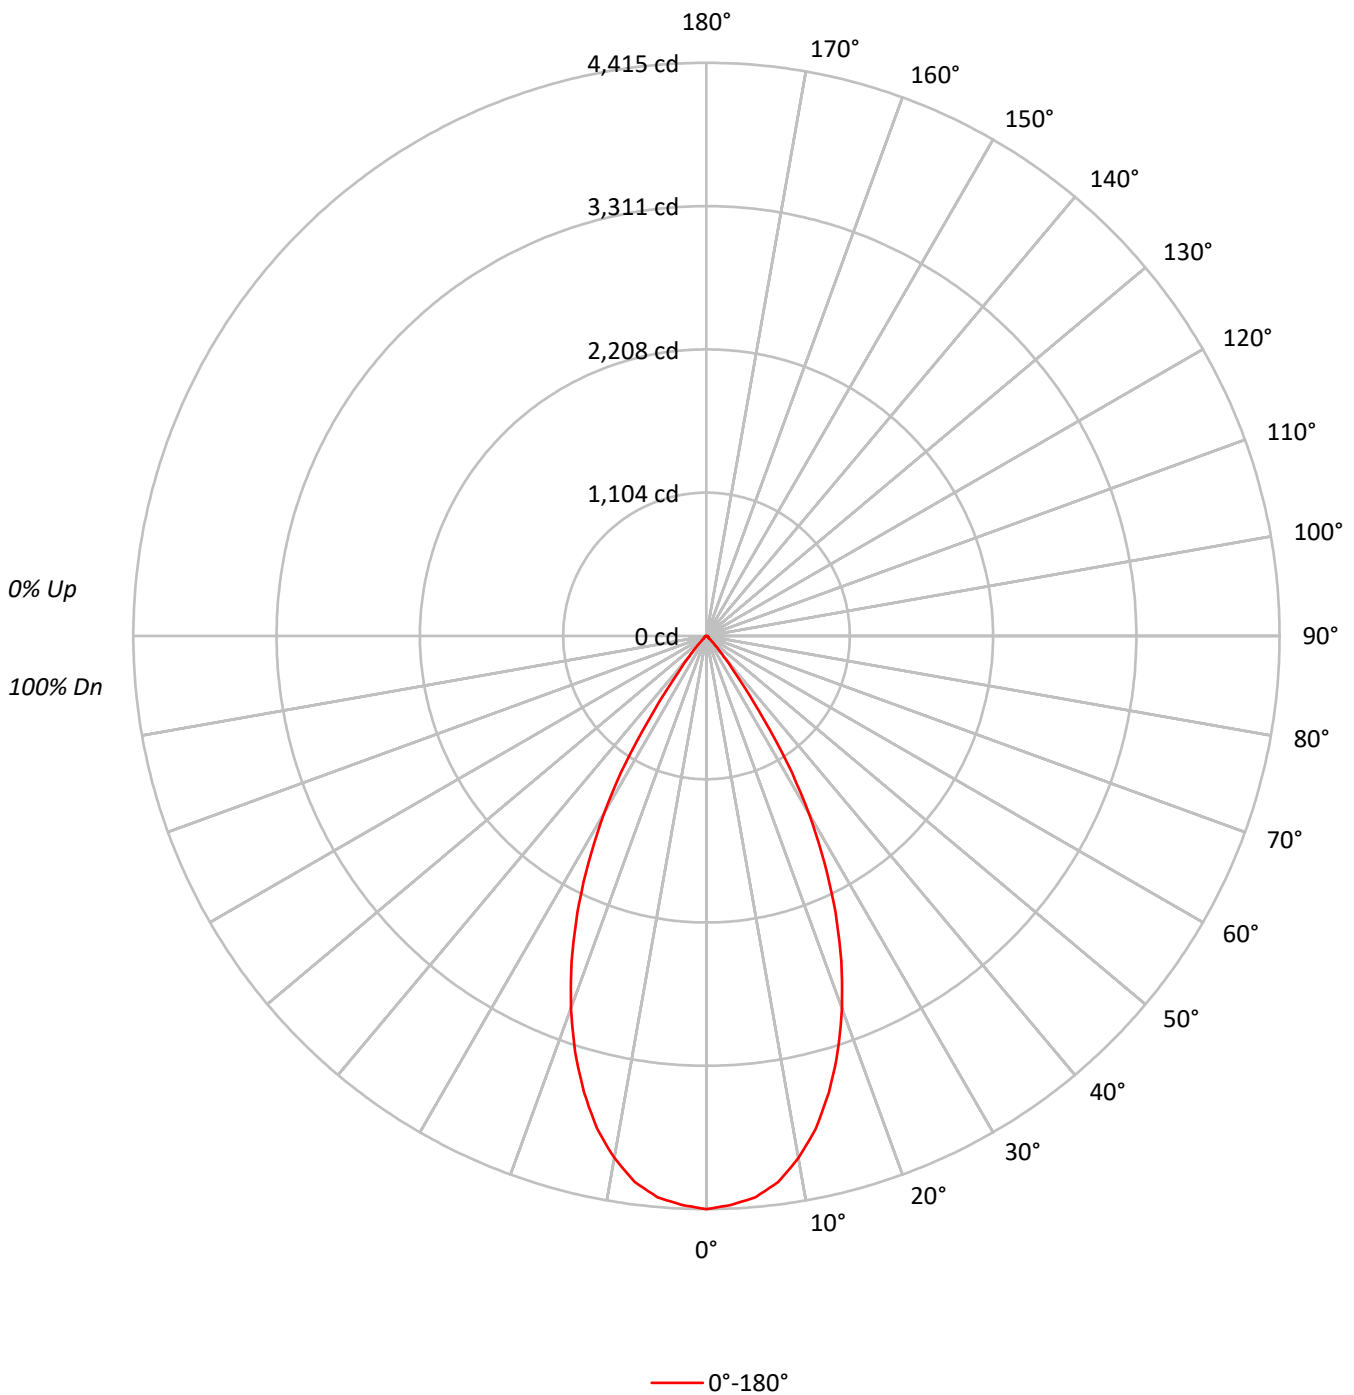



TEST NUMBER: P366307

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR89BI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	74	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	316137
5°	311874
10°	296860
15°	269869
20°	232386
25°	185770
30°	130260
35°	60592
40°	19143
45°	5984
50°	2629
55°	2459
60°	2263
65°	1999
70°	2198
75°	2545
80°	3257
85°	5422



TEST NUMBER: P366307

CATALOG NUMBER: FLD6BX40D010-FEUGB35-8040-F6LBXVM1-WMH-BTR89BI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	406.2	13.3
10°-20°	1009.5	33.1
20°-30°	1061.3	34.8
30°-40°	470.8	15.4
40°-50°	58.9	1.9
50°-60°	17.6	0.6
60°-70°	12.3	0.4
70°-80°	9.7	0.3
80°-90°	5.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2476.9	81.2
0°-40°	2947.7	96.6
0°-60°	3024.2	99.1
0°-90°	3052.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3052.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4415	
5°	4339	406
15°	3641	1009
25°	2351	1061
35°	693	471
45°	59	59
55°	20	18
65°	12	12
75°	9	10
85°	7	6
90°	0	



TEST NUMBER: P366307

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8040-F6LBXVM1-WMH-BTR89BI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4415.2
2.5°	4386.3
5°	4339.1
7.5°	4241.9
10°	4083.0
12.5°	3888.7
15°	3640.6
17.5°	3361.0
20°	3049.8
22.5°	2712.4
25°	2351.4
27.5°	1968.0
30°	1575.5
32.5°	1159.3
35°	693.2
37.5°	368.9
40°	204.8
42.5°	111.6
45°	59.1
47.5°	28.9
50°	23.6
52.5°	21.0
55°	19.7
57.5°	18.4
60°	15.8
62.5°	14.4
65°	11.8
67.5°	10.5
70°	10.5
72.5°	9.2
75°	9.2
77.5°	9.2
80°	7.9
82.5°	6.6
85°	6.6
87.5°	3.9
90°	0.0

(END OF REPORT)