

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364886

Luminaire Tested: **FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR89BV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P364886  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-22)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR89BV  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, CLEAR 0.125", 4000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3447.0 lumens  
Efficiency: N/A  
Efficacy: 84.9 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 40.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P364886

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR89BV

### Luminous Intensity Polar Plot

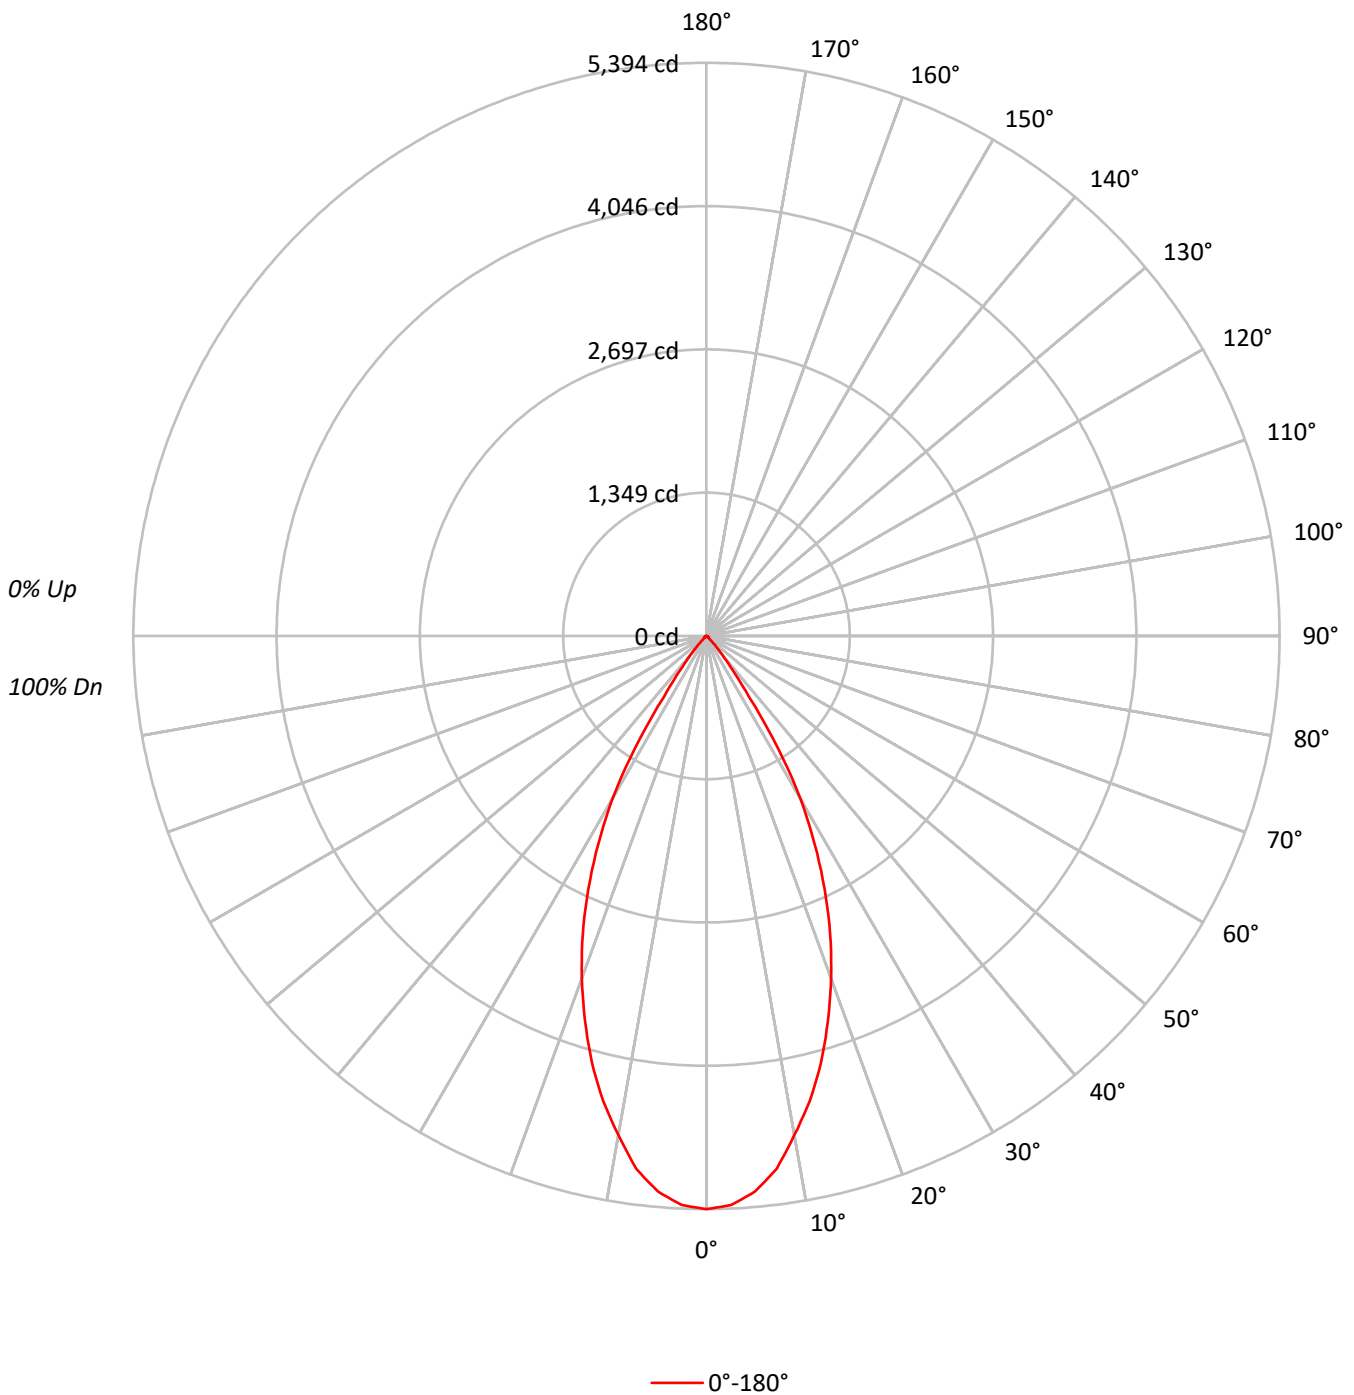



TEST NUMBER: P364886

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR89BV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	79
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68	75	71	68	74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65	72	67	64	71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61	68	64	61	68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	386242
5°	377267
10°	346751
15°	308601
20°	261394
25°	207859
30°	146143
35°	60986
40°	21059
45°	5448
50°	2751
55°	2547
60°	2492
65°	2457
70°	2428
75°	3209
80°	3587
85°	5997



TEST NUMBER: P364886

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR89BV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	485.9	14.1
10°-20°	1153.2	33.5
20°-30°	1190.0	34.5
30°-40°	506.1	14.7
40°-50°	60.7	1.8
50°-60°	18.4	0.5
60°-70°	14.4	0.4
70°-80°	11.5	0.3
80°-90°	6.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2829.1	82.1
0°-40°	3335.3	96.8
0°-60°	3414.4	99.1
0°-90°	3447.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3447.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5394	
5°	5249	486
15°	4163	1153
25°	2631	1190
35°	698	506
45°	54	61
55°	20	18
65°	14	14
75°	12	12
85°	7	7
90°	0	



TEST NUMBER: P364886

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR89BV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5394.3
2.5°	5359.4
5°	5248.9
7.5°	5057.1
10°	4769.2
12.5°	4485.8
15°	4163.1
17.5°	3799.7
20°	3430.5
22.5°	3045.3
25°	2631.0
27.5°	2203.6
30°	1767.6
32.5°	1253.0
35°	697.7
37.5°	401.2
40°	225.3
42.5°	116.3
45°	53.8
47.5°	29.1
50°	24.7
52.5°	21.8
55°	20.4
57.5°	18.9
60°	17.4
62.5°	16.0
65°	14.5
67.5°	13.1
70°	11.6
72.5°	11.6
75°	11.6
77.5°	10.2
80°	8.7
82.5°	8.7
85°	7.3
87.5°	4.4
90°	0.0

(END OF REPORT)