

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364887

Luminaire Tested: **FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR94**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364887
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-27)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR94
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM GLASS, TEMPERED CLEAR 0.187", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3360.0 lumens
Efficiency: N/A
Efficacy: 82.8 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364887

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR94

Luminous Intensity Polar Plot

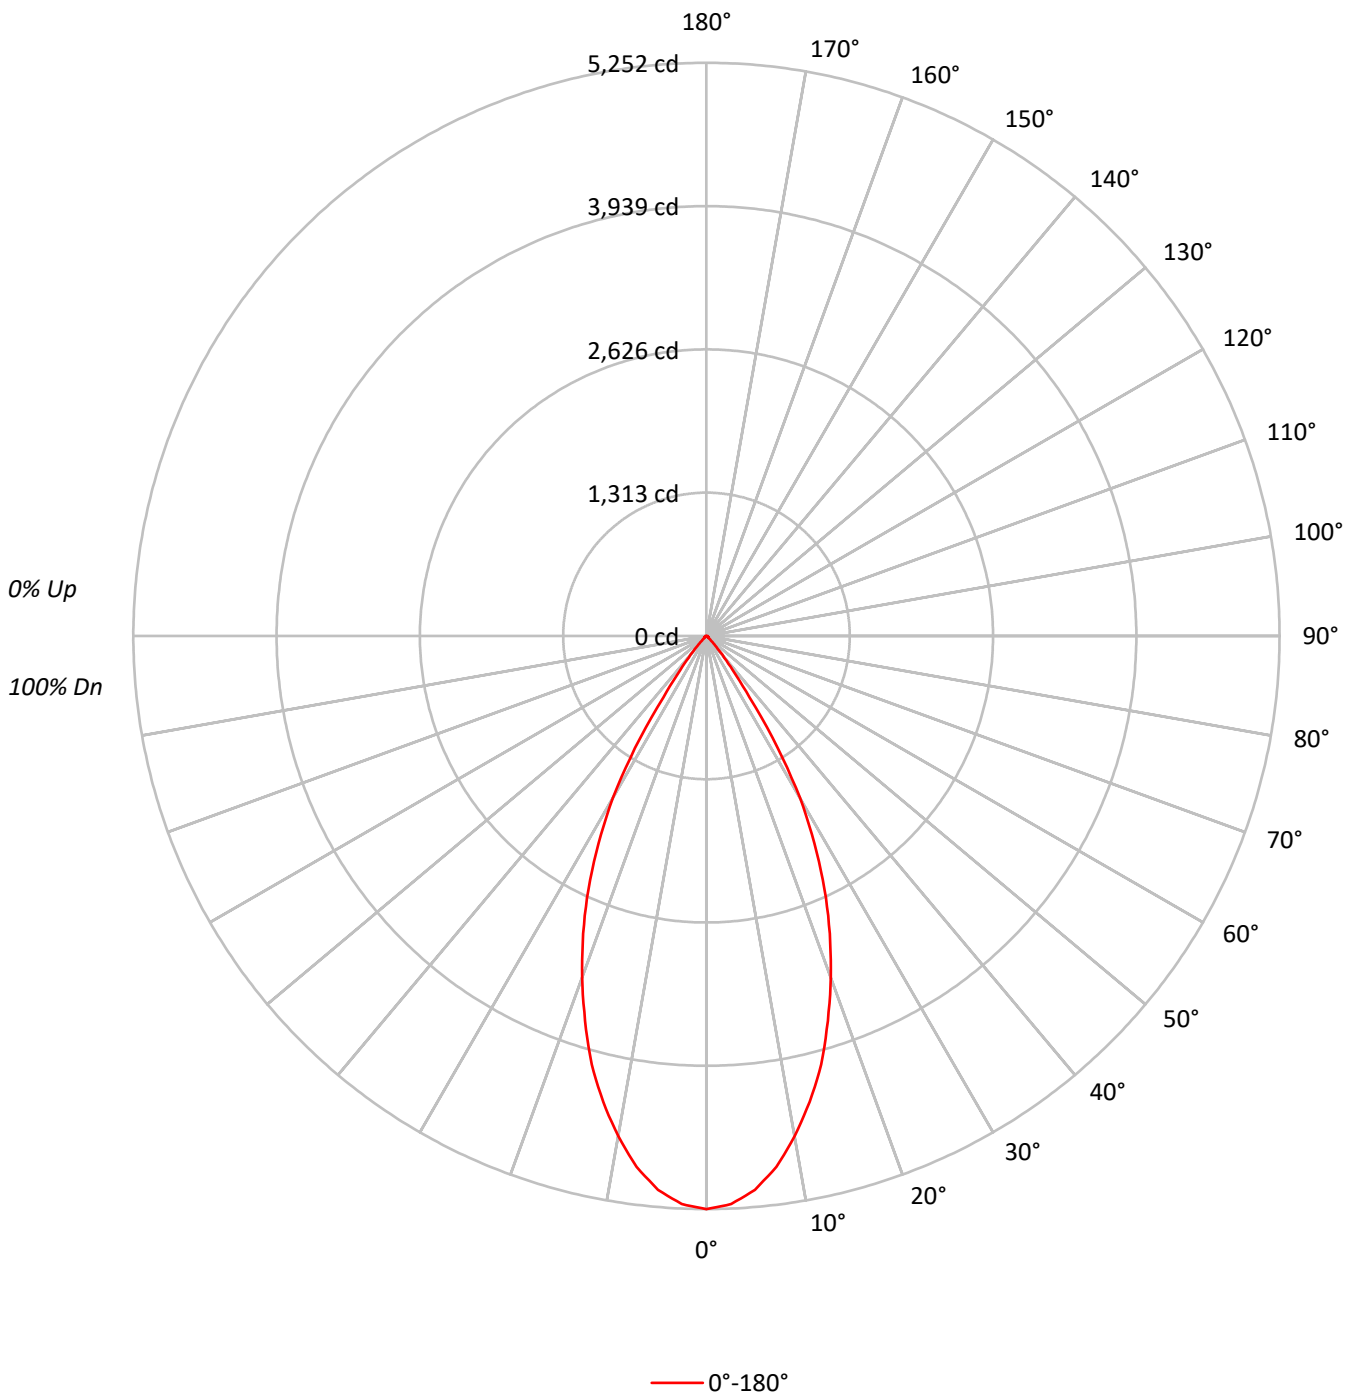



TEST NUMBER: P364887

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR94

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	88
3	104	98	93	90	102	96	92	89	94	90	87	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	77	74	71	70
7	87	78	73	69	85	77	72	68	76	72	68	75	71	68	74	70	67	66
8	83	74	69	65	82	74	68	65	73	68	64	72	67	64	71	67	64	63
9	79	71	65	61	78	70	65	61	69	64	61	68	64	61	67	64	61	59
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	376089
5°	366133
10°	338434
15°	301285
20°	253744
25°	202203
30°	141629
35°	59998
40°	20928
45°	5741
50°	2918
55°	2721
60°	2707
65°	2457
70°	2428
75°	3209
80°	4206
85°	5997



TEST NUMBER: P364887

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR94

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	472.3	14.1
10°-20°	1123.6	33.4
20°-30°	1155.9	34.4
30°-40°	493.6	14.7
40°-50°	61.6	1.8
50°-60°	19.7	0.6
60°-70°	14.6	0.4
70°-80°	11.7	0.3
80°-90°	6.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2751.8	81.9
0°-40°	3245.5	96.6
0°-60°	3326.8	99.0
0°-90°	3360.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3360.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5252	
5°	5094	472
15°	4064	1124
25°	2559	1156
35°	686	494
45°	57	62
55°	22	20
65°	14	15
75°	12	12
85°	7	7
90°	0	



TEST NUMBER: P364887

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-LI-BTR94

CANDELA DISTRIBUTION (FULL):

	0°
0°	5252.5
2.5°	5210.3
5°	5094.0
7.5°	4907.9
10°	4654.8
12.5°	4372.7
15°	4064.4
17.5°	3698.0
20°	3330.1
22.5°	2952.0
25°	2559.4
27.5°	2144.9
30°	1713.0
32.5°	1217.1
35°	686.4
37.5°	392.6
40°	223.9
42.5°	116.3
45°	56.7
47.5°	30.5
50°	26.2
52.5°	23.3
55°	21.8
57.5°	20.4
60°	18.9
62.5°	16.0
65°	14.5
67.5°	13.1
70°	11.6
72.5°	11.6
75°	11.6
77.5°	10.2
80°	10.2
82.5°	8.7
85°	7.3
87.5°	4.4
90°	0.0

(END OF REPORT)