

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365601

Luminaire Tested: **FLD6BX40D010-FEU6B35-8050-F6LBXVM1-MW-BTR84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365601
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-15)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-MW-BTR84
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 4000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2583.0 lumens
Efficiency: N/A
Efficacy: 63.6 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.84
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 40.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365601

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-MW-BTR84

Luminous Intensity Polar Plot

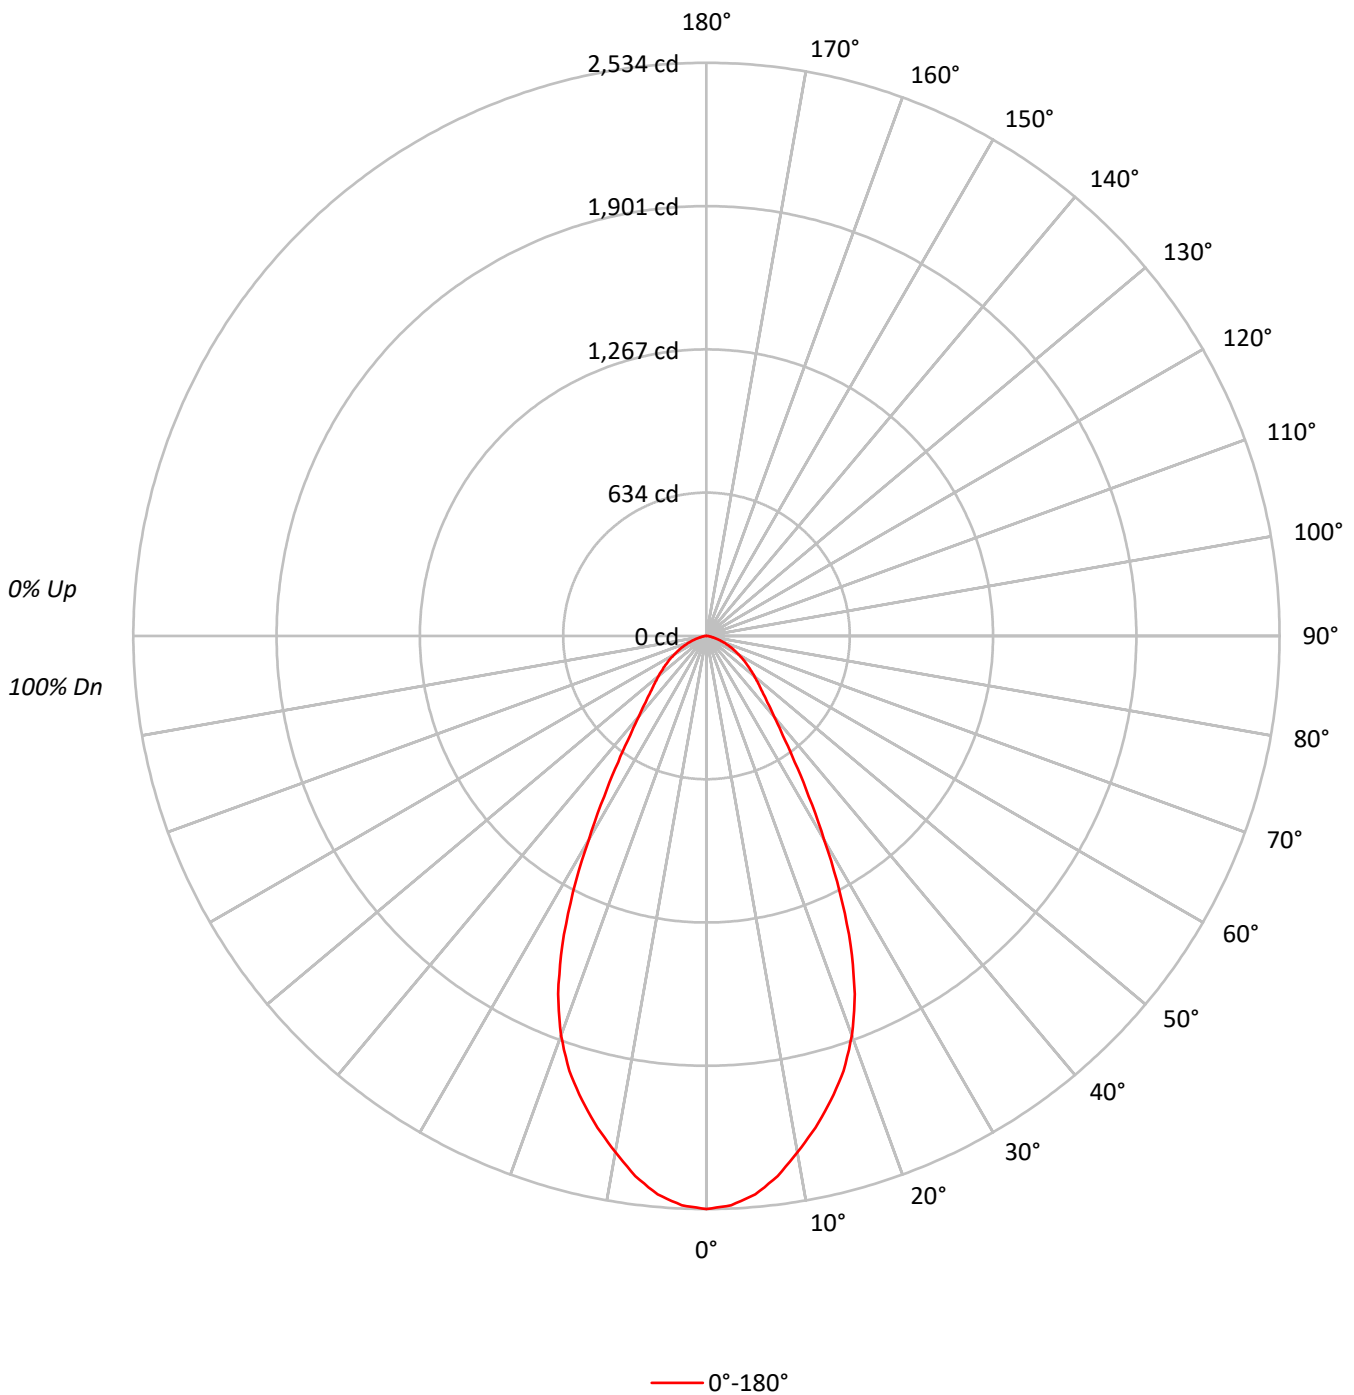



TEST NUMBER: P365601

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-MW-BTR84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | | 50 | 30 | 10 | | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | | 106 | 106 | 106 | | 102 | 102 | 102 | 100 |
| 1 | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 101 | 102 | 100 | 98 | | 99 | 97 | 95 | | 95 | 94 | 93 | 91 |
| 2 | 105 | 99 | 94 | 90 | 103 | 97 | 93 | 89 | 94 | 90 | 87 | | 91 | 88 | 85 | | 88 | 86 | 84 | 82 |
| 3 | 99 | 91 | 85 | 80 | 96 | 89 | 84 | 80 | 87 | 82 | 78 | | 84 | 80 | 77 | | 82 | 79 | 76 | 74 |
| 4 | 93 | 84 | 77 | 72 | 91 | 82 | 76 | 72 | 80 | 75 | 71 | | 78 | 74 | 70 | | 76 | 72 | 69 | 67 |
| 5 | 87 | 77 | 71 | 65 | 85 | 76 | 70 | 65 | 74 | 69 | 65 | | 73 | 68 | 64 | | 71 | 67 | 63 | 62 |
| 6 | 82 | 72 | 65 | 60 | 81 | 71 | 64 | 60 | 69 | 64 | 59 | | 68 | 63 | 59 | | 67 | 62 | 58 | 57 |
| 7 | 78 | 67 | 60 | 55 | 76 | 66 | 60 | 55 | 65 | 59 | 55 | | 64 | 58 | 54 | | 62 | 58 | 54 | 53 |
| 8 | 73 | 63 | 56 | 51 | 72 | 62 | 56 | 51 | 61 | 55 | 51 | | 60 | 55 | 51 | | 59 | 54 | 50 | 49 |
| 9 | 70 | 59 | 52 | 48 | 68 | 58 | 52 | 48 | 57 | 52 | 47 | | 56 | 51 | 47 | | 55 | 51 | 47 | 46 |
| 10 | 66 | 55 | 49 | 45 | 65 | 55 | 49 | 45 | 54 | 48 | 44 | | 53 | 48 | 44 | | 52 | 48 | 44 | 43 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 181418 |
| 5° | 178143 |
| 10° | 168468 |
| 15° | 157544 |
| 20° | 143220 |
| 25° | 119209 |
| 30° | 86052 |
| 35° | 59465 |
| 40° | 43482 |
| 45° | 35330 |
| 50° | 30767 |
| 55° | 27039 |
| 60° | 23528 |
| 65° | 19941 |
| 70° | 16120 |
| 75° | 11260 |
| 80° | 7175 |
| 85° | 8380 |



TEST NUMBER: P365601

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-MW-BTR84

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 231.4 | 9.0 |
| 10°-20° | 593.8 | 23.0 |
| 20°-30° | 678.2 | 26.3 |
| 30°-40° | 437.5 | 16.9 |
| 40°-50° | 274.7 | 10.6 |
| 50°-60° | 194.8 | 7.5 |
| 60°-70° | 117.4 | 4.5 |
| 70°-80° | 45.3 | 1.8 |
| 80°-90° | 9.9 | 0.4 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1503.4 | 58.2 |
| 0°-40° | 1940.9 | 75.1 |
| 0°-60° | 2410.4 | 93.3 |
| 0°-90° | 2583.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 2583.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 2534 | |
| 5° | 2478 | 231 |
| 15° | 2125 | 594 |
| 25° | 1509 | 678 |
| 35° | 680 | 437 |
| 45° | 349 | 275 |
| 55° | 217 | 195 |
| 65° | 118 | 117 |
| 75° | 41 | 45 |
| 85° | 10 | 10 |
| 90° | 0 | |



TEST NUMBER: P365601

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-MW-BTR84

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 2533.7 |
| 2.5° | 2519.2 |
| 5° | 2478.5 |
| 7.5° | 2408.7 |
| 10° | 2317.1 |
| 12.5° | 2227.0 |
| 15° | 2125.3 |
| 17.5° | 2016.2 |
| 20° | 1879.6 |
| 22.5° | 1713.9 |
| 25° | 1508.9 |
| 27.5° | 1277.8 |
| 30° | 1040.8 |
| 32.5° | 841.7 |
| 35° | 680.3 |
| 37.5° | 555.3 |
| 40° | 465.2 |
| 42.5° | 399.8 |
| 45° | 348.9 |
| 47.5° | 309.6 |
| 50° | 276.2 |
| 52.5° | 245.7 |
| 55° | 216.6 |
| 57.5° | 190.4 |
| 60° | 164.3 |
| 62.5° | 141.0 |
| 65° | 117.7 |
| 67.5° | 95.9 |
| 70° | 77.0 |
| 72.5° | 56.7 |
| 75° | 40.7 |
| 77.5° | 27.6 |
| 80° | 17.4 |
| 82.5° | 11.6 |
| 85° | 10.2 |
| 87.5° | 5.8 |
| 90° | 0.0 |

(END OF REPORT)