

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366323

Luminaire Tested: **FLD6BX40D010-FEU6B35-8050-F6LBXVM1-WMH-BTR86**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P366323  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-WMH-BTR86  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, CLEAR 0.250", 4000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3114.1 lumens  
Efficiency: N/A  
Efficacy: 76.7 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 40.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P366323

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-WMH-BTR86

### Luminous Intensity Polar Plot

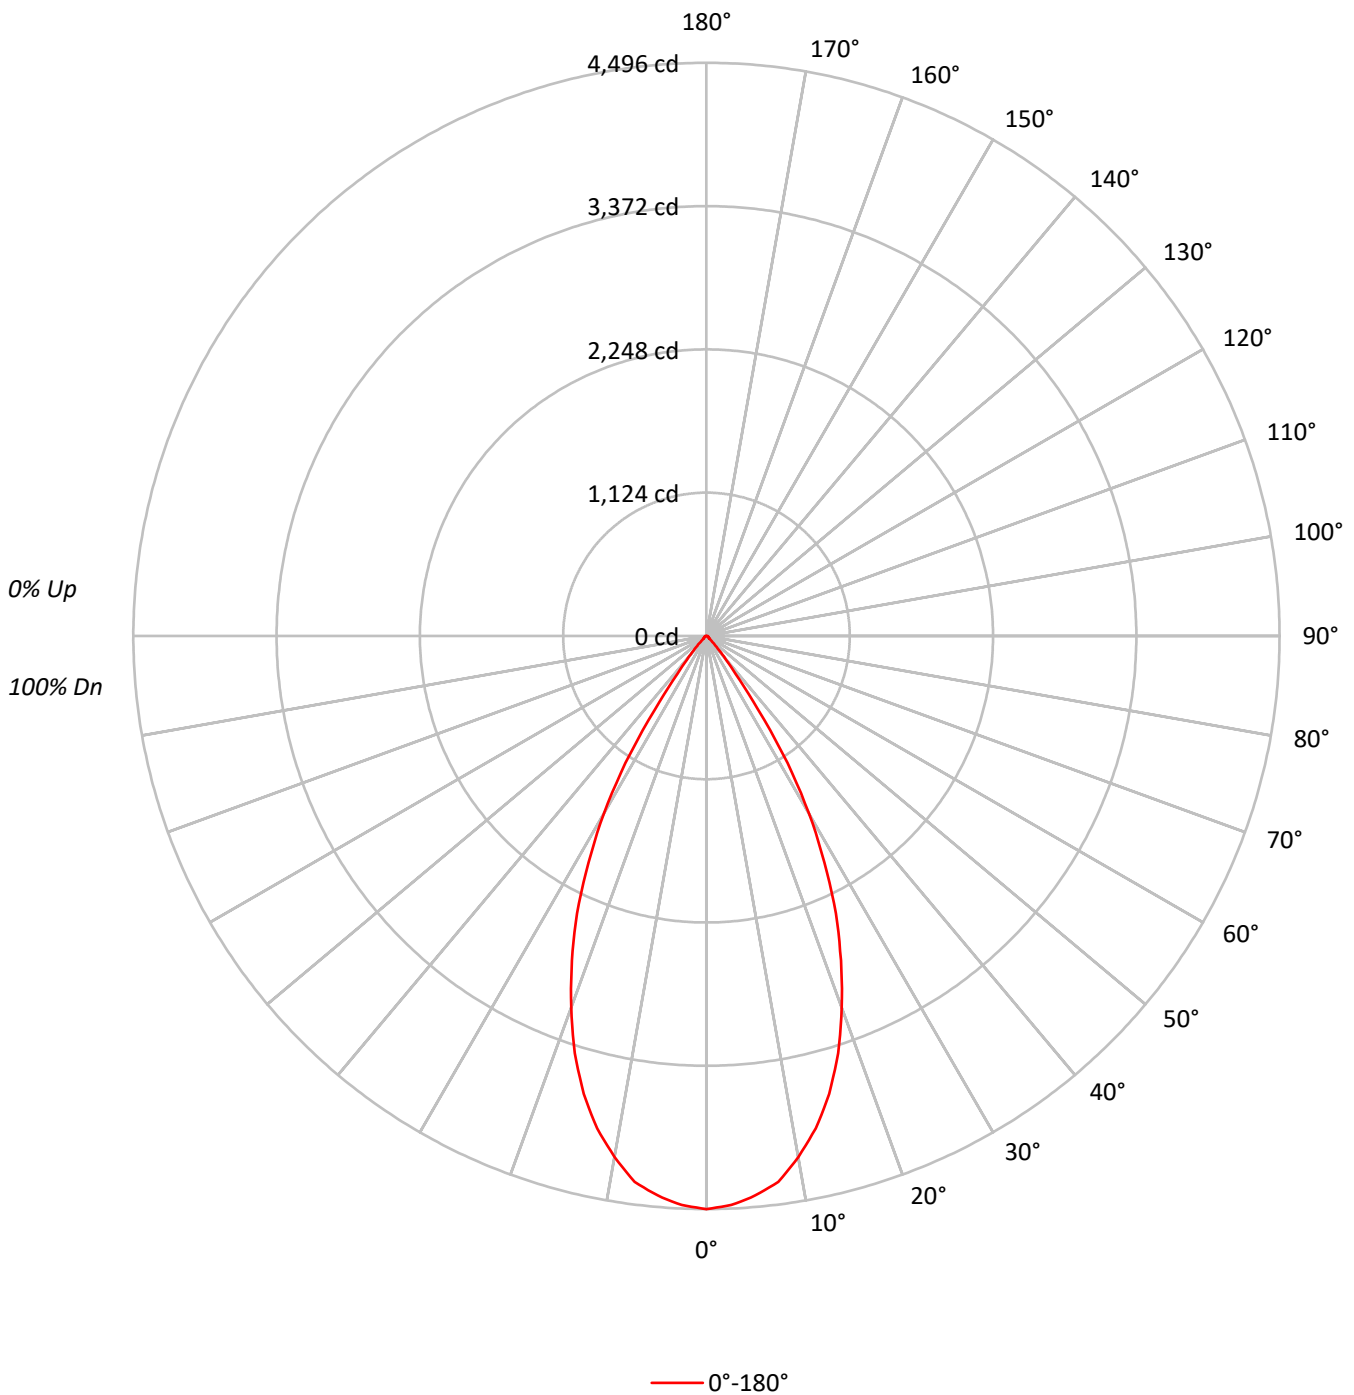



TEST NUMBER: P366323

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-WMH-BTR86

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87		91	88	86		89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76		82	79	76		81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72		78	74	71		77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68		75	70	67		73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64		71	67	64		70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60		68	63	60		67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57		65	60	57		64	60	57	56

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	321958
5°	316654
10°	301717
15°	275703
20°	236432
25°	189712
30°	133013
35°	61458
40°	19731
45°	6369
50°	2963
55°	2622
60°	2606
65°	2372
70°	2345
75°	2711
80°	3464
85°	5751



TEST NUMBER: P366323

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-WMH-BTR86

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	413.2	13.3
10°-20°	1029.2	33.1
20°-30°	1080.9	34.7
30°-40°	479.7	15.4
40°-50°	62.0	2.0
50°-60°	19.4	0.6
60°-70°	13.7	0.4
70°-80°	10.0	0.3
80°-90°	6.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2523.3	81.0
0°-40°	3003.0	96.4
0°-60°	3084.3	99.0
0°-90°	3114.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3114.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4496	
5°	4406	413
15°	3719	1029
25°	2401	1081
35°	703	480
45°	63	62
55°	21	19
65°	14	14
75°	10	10
85°	7	6
90°	0	



TEST NUMBER: P366323

CATALOG NUMBER: FLD6BX40D010-FEU6B35-8050-F6LBXVM1-WMH-BTR86

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4496.5
2.5°	4468.5
5°	4405.6
7.5°	4320.3
10°	4149.8
12.5°	3958.3
15°	3719.3
17.5°	3432.8
20°	3102.9
22.5°	2756.3
25°	2401.3
27.5°	2002.9
30°	1608.8
32.5°	1182.5
35°	703.1
37.5°	374.6
40°	211.1
42.5°	116.0
45°	62.9
47.5°	32.1
50°	26.6
52.5°	23.8
55°	21.0
57.5°	19.6
60°	18.2
62.5°	15.4
65°	14.0
67.5°	11.2
70°	11.2
72.5°	9.8
75°	9.8
77.5°	8.4
80°	8.4
82.5°	7.0
85°	7.0
87.5°	4.2
90°	0.0

(END OF REPORT)