

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365625

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-MW-BTR94**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365625
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-21)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-MW-BTR94
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,
BOTTOM TRIM GLASS, TEMPERED CLEAR 0.187", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2910.0 lumens
Efficiency: N/A
Efficacy: 52.8 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.83
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365625

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-MW-BTR94

Luminous Intensity Polar Plot

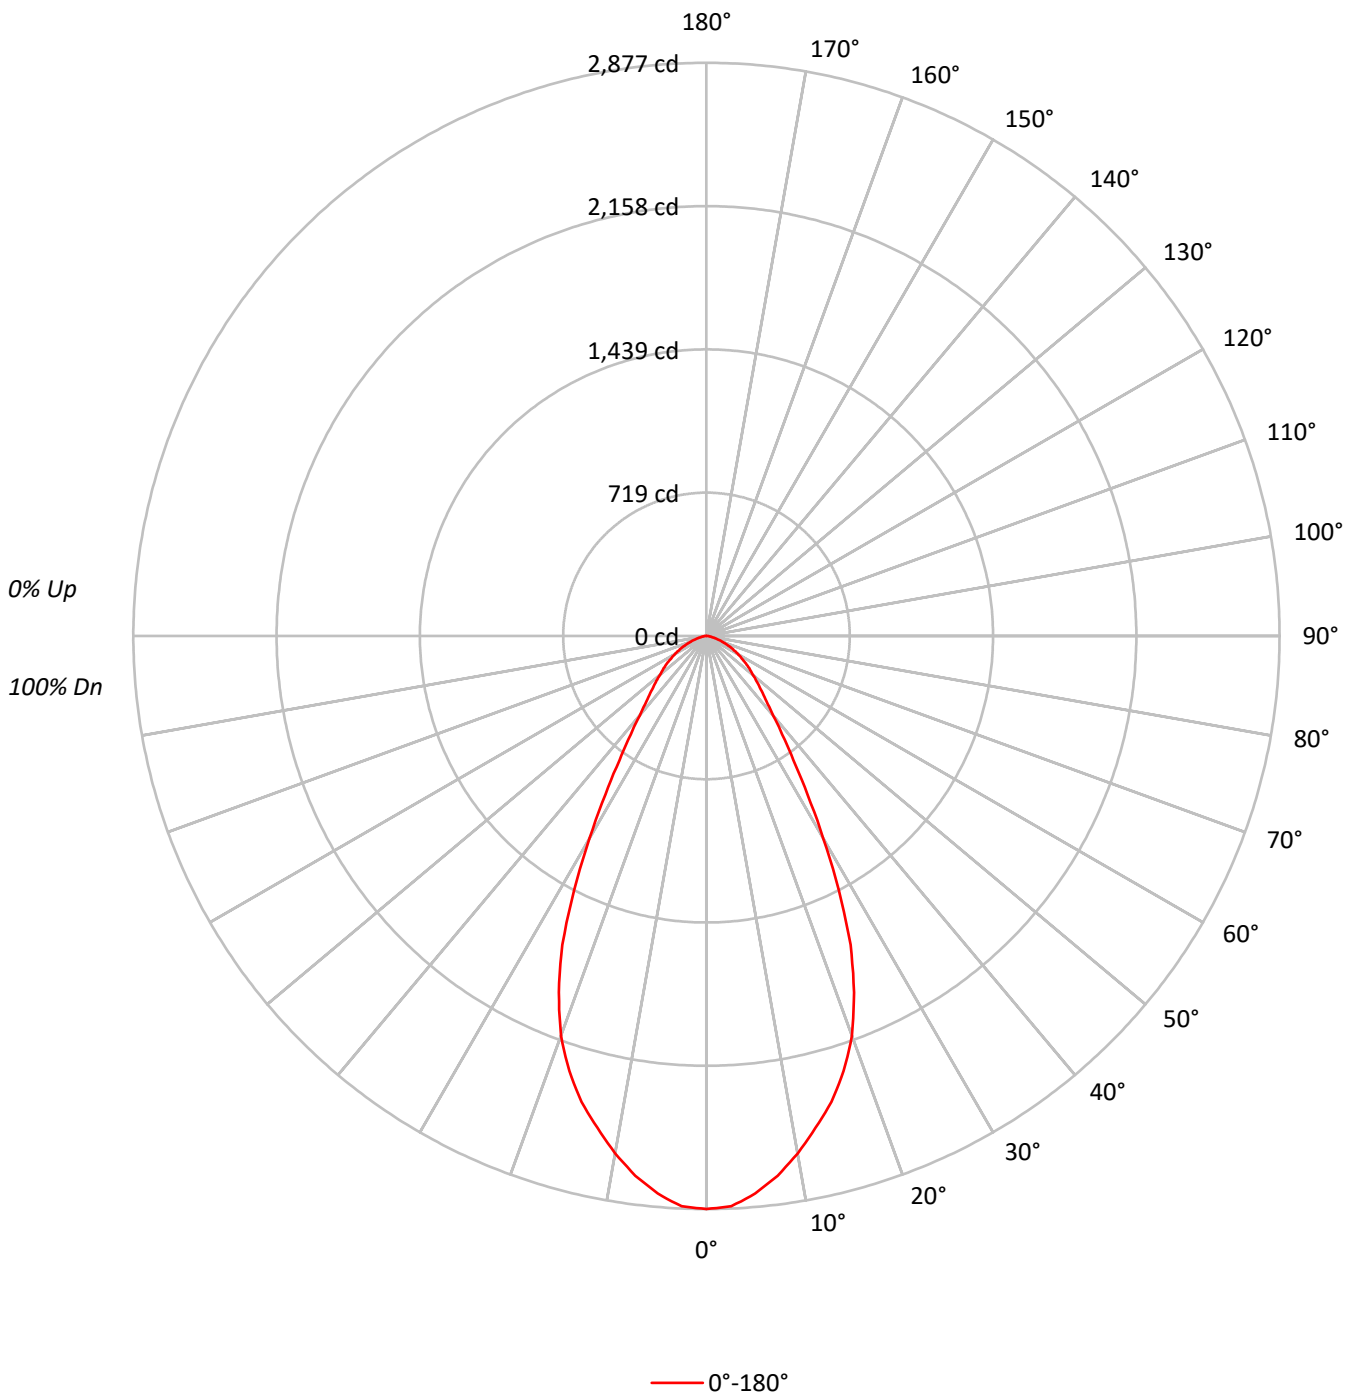



TEST NUMBER: P365625

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-MW-BTR94

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	98	93	89	94	91	87		91	88	85		88	86	84	82
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82	79	76	74
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	72	69	68
5	87	78	71	66	85	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67	62	59	57
7	78	67	60	56	76	66	60	55	65	59	55		64	59	55		63	58	54	53
8	74	63	56	51	72	62	56	51	61	55	51		60	55	51		59	54	51	49
9	70	59	52	48	69	59	52	48	58	52	48		57	51	48		56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45		53	48	45		53	48	44	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	205970
5°	201941
10°	191785
15°	179537
20°	162742
25°	135144
30°	96949
35°	66466
40°	48763
45°	39583
50°	34064
55°	30210
60°	26235
65°	22161
70°	17460
75°	12670
80°	8082
85°	9366



TEST NUMBER: P365625

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-MW-BTR94

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	262.7	9.0
10°-20°	675.1	23.2
20°-30°	766.5	26.3
30°-40°	490.6	16.9
40°-50°	306.5	10.5
50°-60°	217.0	7.5
60°-70°	129.9	4.5
70°-80°	50.6	1.7
80°-90°	11.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1704.4	58.6
0°-40°	2195.0	75.4
0°-60°	2718.5	93.4
0°-90°	2910.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2910.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2877	
5°	2810	263
15°	2422	675
25°	1711	767
35°	760	491
45°	391	307
55°	242	217
65°	131	130
75°	46	51
85°	11	11
90°	0	



TEST NUMBER: P365625

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-MW-BTR94

CANDELA DISTRIBUTION (FULL):

0°	
0°	2876.6
2.5°	2865.2
5°	2809.6
7.5°	2732.7
10°	2637.8
12.5°	2528.3
15°	2422.0
17.5°	2289.5
20°	2135.8
22.5°	1936.3
25°	1710.6
27.5°	1437.5
30°	1172.6
32.5°	942.0
35°	760.4
37.5°	624.7
40°	521.7
42.5°	444.8
45°	390.9
47.5°	345.1
50°	305.8
52.5°	274.7
55°	242.0
57.5°	211.0
60°	183.2
62.5°	155.4
65°	130.8
67.5°	106.3
70°	83.4
72.5°	63.8
75°	45.8
77.5°	31.1
80°	19.6
82.5°	13.1
85°	11.4
87.5°	6.5
90°	0.0

(END OF REPORT)