

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366340

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR85**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366340
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR85
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.187", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3617.0 lumens
Efficiency: N/A
Efficacy: 65.6 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366340

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR85

Luminous Intensity Polar Plot

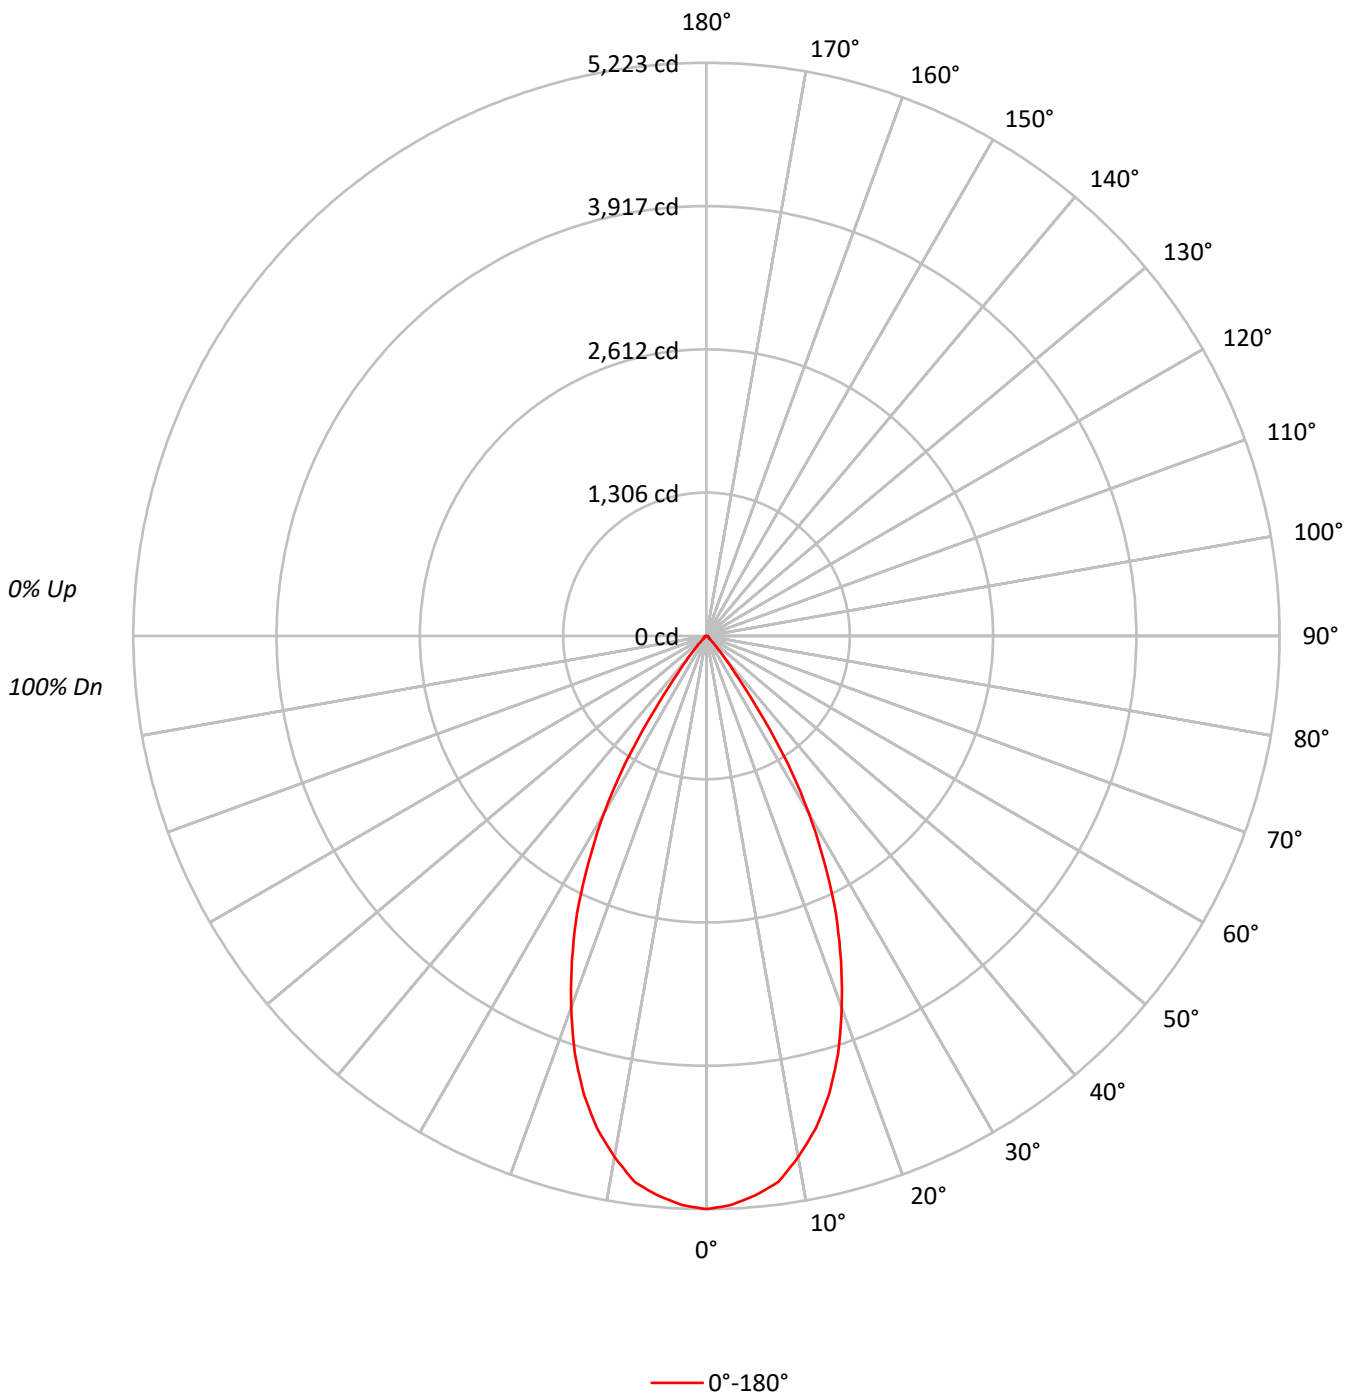



TEST NUMBER: P366340

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR85

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	373962
5°	367801
10°	350452
15°	320239
20°	274622
25°	220358
30°	154493
35°	71379
40°	22909
45°	7402
50°	3431
55°	3046
60°	3022
65°	2745
70°	2722
75°	3154
80°	4000
85°	6654



TEST NUMBER: P366340

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR85

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	479.9	13.3
10°-20°	1195.5	33.1
20°-30°	1255.5	34.7
30°-40°	557.1	15.4
40°-50°	72.0	2.0
50°-60°	22.5	0.6
60°-70°	15.9	0.4
70°-80°	11.6	0.3
80°-90°	7.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2930.9	81.0
0°-40°	3488.0	96.4
0°-60°	3582.5	99.0
0°-90°	3617.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3617.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5223	
5°	5117	480
15°	4320	1195
25°	2789	1255
35°	817	557
45°	73	72
55°	24	22
65°	16	16
75°	11	12
85°	8	7
90°	0	



TEST NUMBER: P366340

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8027-F6LBXVM1-WMH-BTR85

CANDELA DISTRIBUTION (FULL):

	0°
0°	5222.8
2.5°	5190.3
5°	5117.2
7.5°	5018.2
10°	4820.1
12.5°	4597.7
15°	4320.1
17.5°	3987.3
20°	3604.1
22.5°	3201.5
25°	2789.2
27.5°	2326.5
30°	1868.6
32.5°	1373.5
35°	816.6
37.5°	435.1
40°	245.1
42.5°	134.7
45°	73.1
47.5°	37.3
50°	30.8
52.5°	27.6
55°	24.4
57.5°	22.7
60°	21.1
62.5°	17.9
65°	16.2
67.5°	13.0
70°	13.0
72.5°	11.4
75°	11.4
77.5°	9.7
80°	9.7
82.5°	8.1
85°	8.1
87.5°	4.9
90°	0.0

(END OF REPORT)