

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364915

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR81**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P364915
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-25)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR81
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.156", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3771.0 lumens
Efficiency: N/A
Efficacy: 68.4 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.19
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P364915

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR81

Luminous Intensity Polar Plot

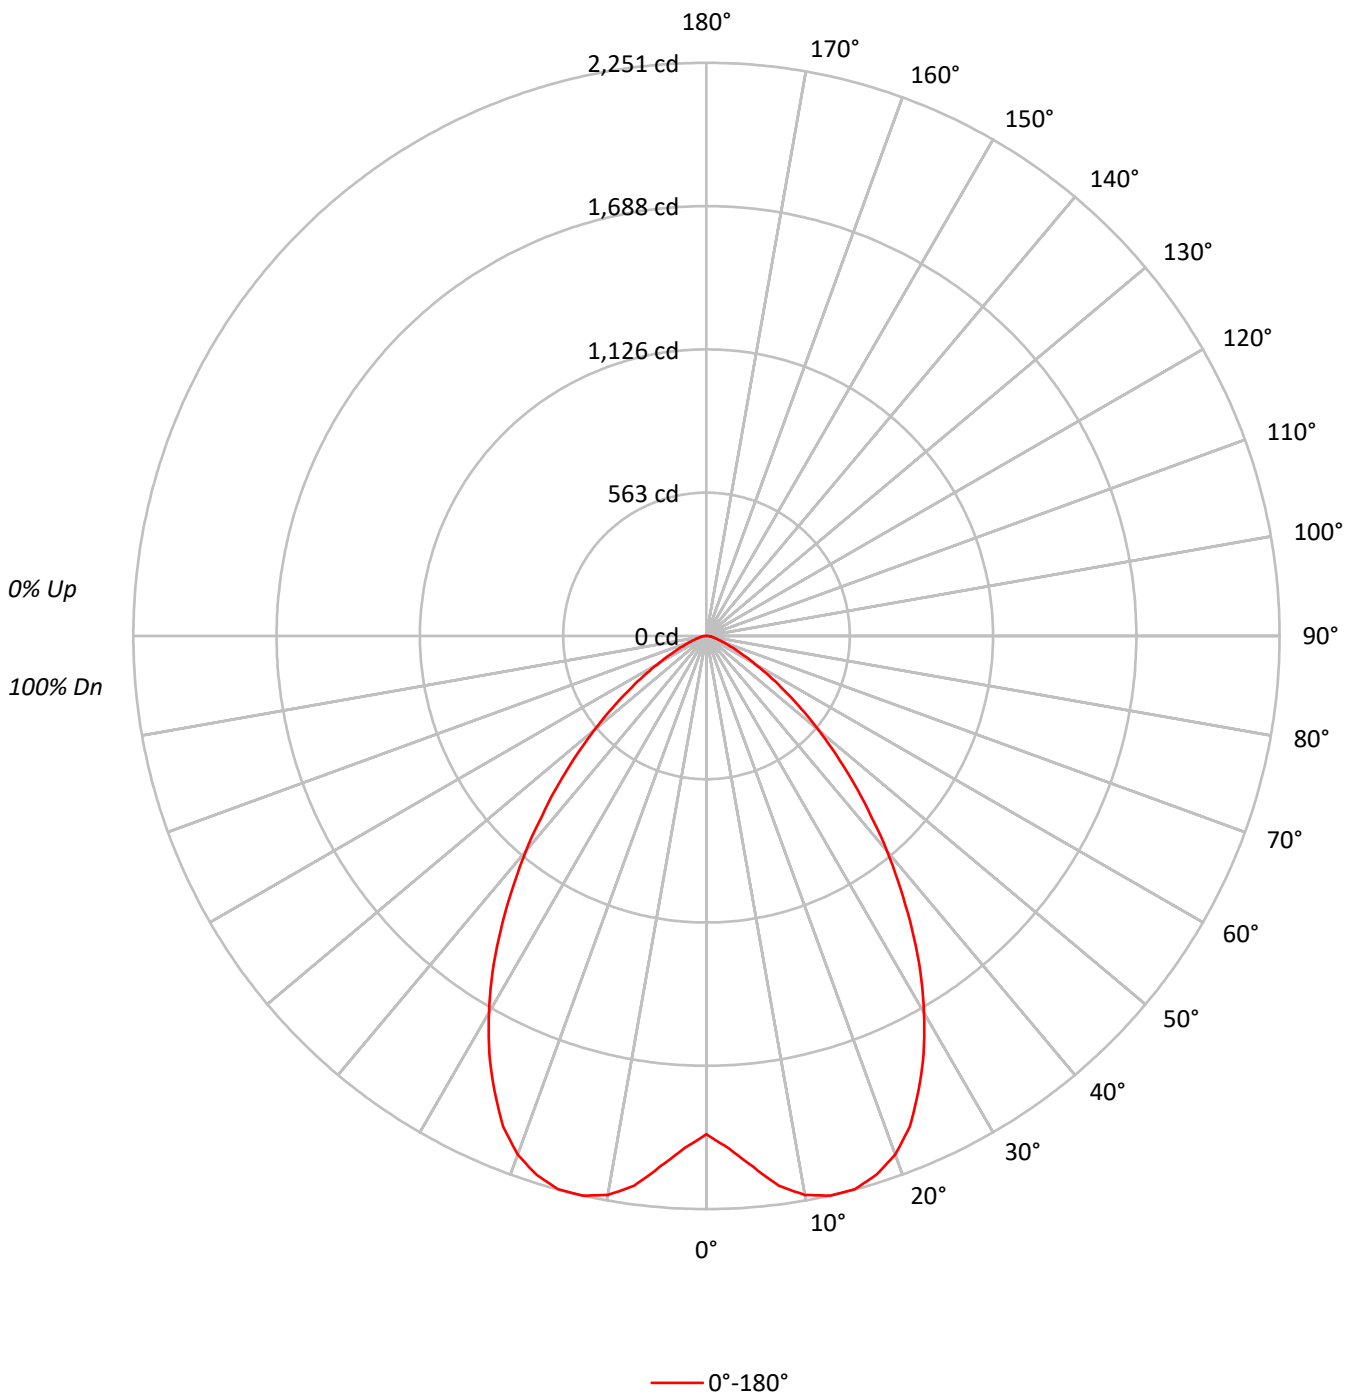



TEST NUMBER: P364915

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR81

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		82	78	75		80	76	73	72
4	91	81	74	69	89	80	73	68	78	72	68		75	71	67		73	69	66	64
5	85	74	67	61	83	73	66	61	71	65	61		69	64	60		68	63	59	58
6	79	68	61	55	77	67	60	55	66	59	55		64	59	54		63	58	54	52
7	74	63	55	50	73	62	55	50	61	54	50		59	54	49		58	53	49	47
8	70	58	51	46	68	57	50	46	56	50	45		55	49	45		54	49	45	43
9	65	54	47	42	64	53	46	42	52	46	42		51	46	41		50	45	41	40
10	62	50	43	39	61	50	43	38	49	43	38		48	42	38		47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	140153
5°	150392
10°	162077
15°	166765
20°	165165
25°	155717
30°	141199
35°	123125
40°	103218
45°	83094
50°	63984
55°	46526
60°	31576
65°	20856
70°	13608
75°	10402
80°	9154
85°	11255



TEST NUMBER: P364915

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR81

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	204.3	5.4
10°-20°	631.1	16.7
20°-30°	901.2	23.9
30°-40°	876.7	23.2
40°-50°	634.2	16.8
50°-60°	340.0	9.0
60°-70°	128.2	3.4
70°-80°	42.1	1.1
80°-90°	13.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1736.6	46.1
0°-40°	2613.3	69.3
0°-60°	3587.4	95.1
0°-90°	3771.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3771.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1957	
5°	2092	204
15°	2250	631
25°	1971	901
35°	1409	877
45°	821	634
55°	373	340
65°	123	128
75°	38	42
85°	14	13
90°	0	



TEST NUMBER: P364915

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR81

CANDELA DISTRIBUTION (FULL):

	0°
0°	1957.4
2.5°	2013.8
5°	2092.4
7.5°	2177.9
10°	2229.2
12.5°	2251.4
15°	2249.7
17.5°	2218.9
20°	2167.6
22.5°	2085.6
25°	1971.0
27.5°	1848.0
30°	1707.8
32.5°	1564.2
35°	1408.6
37.5°	1251.3
40°	1104.3
42.5°	953.9
45°	820.6
47.5°	690.6
50°	574.4
52.5°	466.7
55°	372.7
57.5°	292.3
60°	220.5
62.5°	165.8
65°	123.1
67.5°	88.9
70°	65.0
72.5°	49.6
75°	37.6
77.5°	29.1
80°	22.2
82.5°	17.1
85°	13.7
87.5°	6.8
90°	0.0

(END OF REPORT)