

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364919

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR86**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P364919  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR86  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM POLYCARBONATE, CLEAR 0.250", 5000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3720.0 lumens  
Efficiency: N/A  
Efficacy: 67.5 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 55.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P364919

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR86

### Luminous Intensity Polar Plot

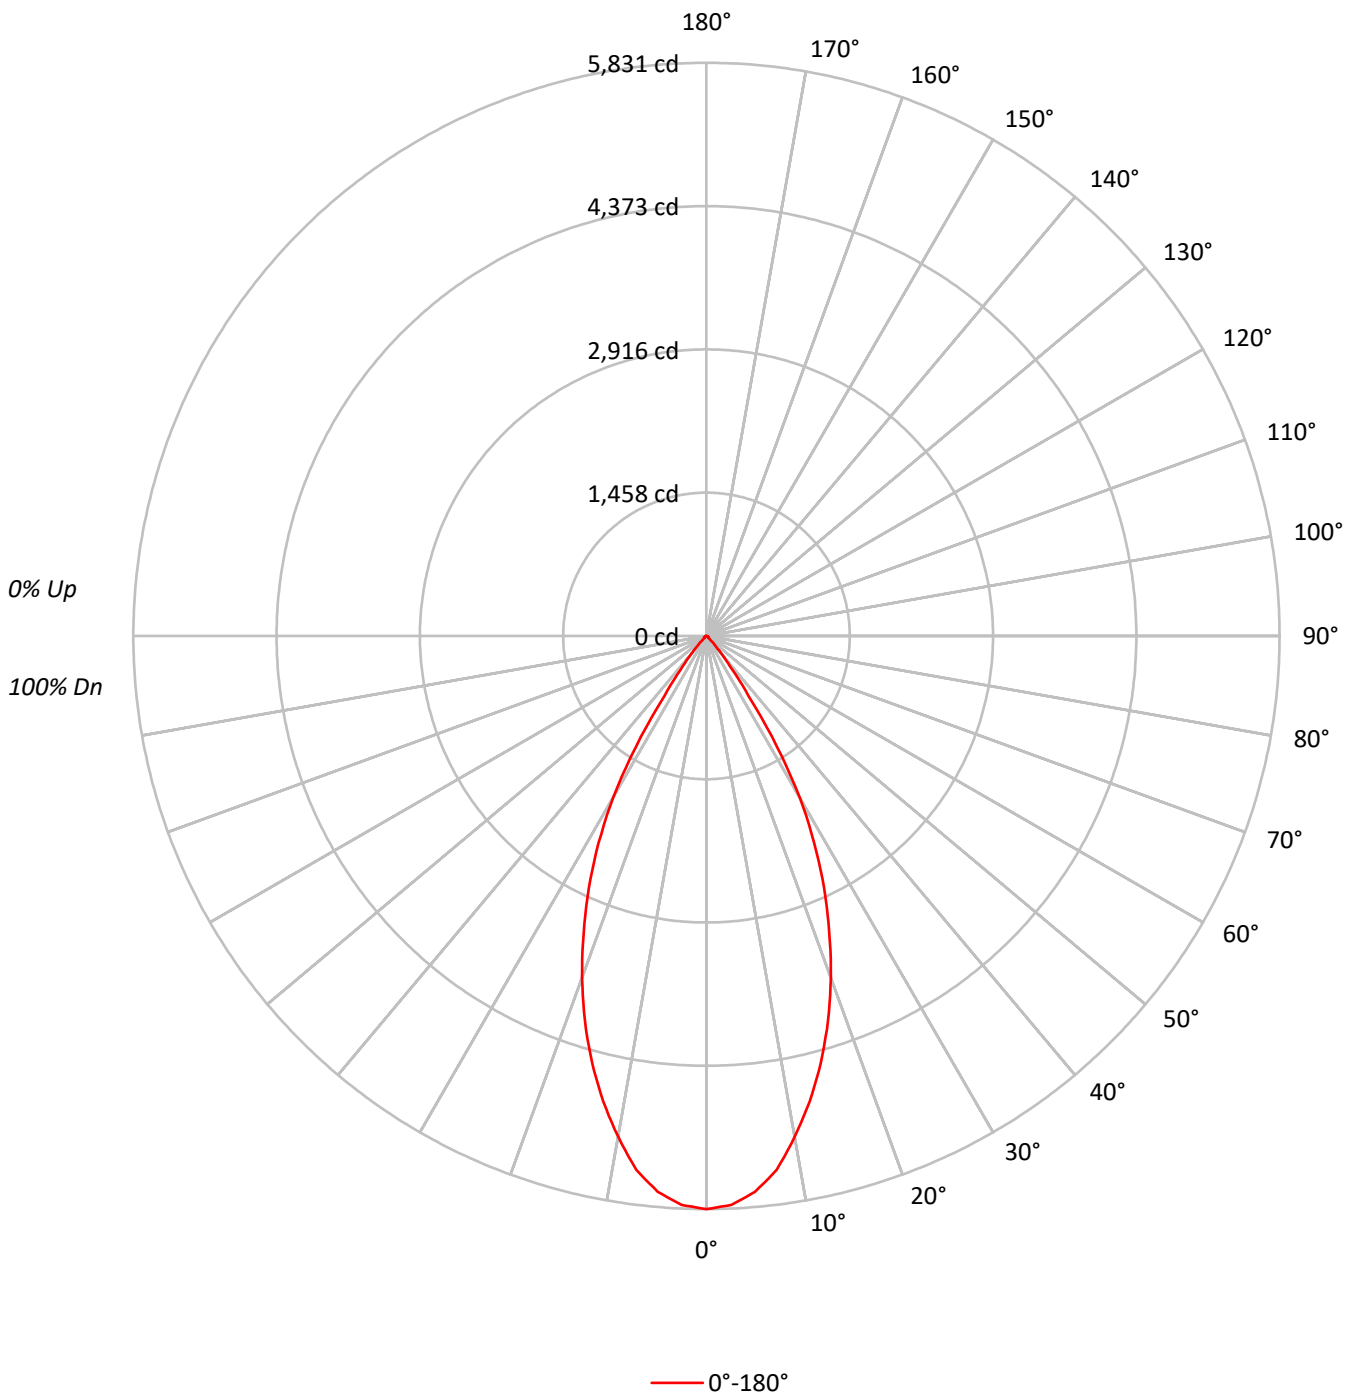



TEST NUMBER: P364919

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR86

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87		92	89	86		89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82		87	84	81		85	82	80	78
5	95	87	82	78	93	86	81	77	84	80	77		83	79	76		81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72		79	75	72		78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	417525
5°	408008
10°	376139
15°	333152
20°	282051
25°	223455
30°	157032
35°	65400
40°	22442
45°	5995
50°	3297
55°	3083
60°	2821
65°	2779
70°	2763
75°	3181
80°	4082
85°	6737



TEST NUMBER: P364919

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR86

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	526.1	14.1
10°-20°	1246.8	33.5
20°-30°	1280.0	34.4
30°-40°	542.0	14.6
40°-50°	66.6	1.8
50°-60°	22.1	0.6
60°-70°	16.3	0.4
70°-80°	12.6	0.3
80°-90°	7.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3052.8	82.1
0°-40°	3594.8	96.6
0°-60°	3683.5	99.0
0°-90°	3720.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3720.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5831	
5°	5677	526
15°	4494	1247
25°	2828	1280
35°	748	542
45°	59	67
55°	25	22
65°	16	16
75°	12	13
85°	8	8
90°	0	



TEST NUMBER: P364919

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-LI-BTR86

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5831.2
2.5°	5793.4
5°	5676.6
7.5°	5476.0
10°	5173.4
12.5°	4851.1
15°	4494.3
17.5°	4111.1
20°	3701.6
22.5°	3265.9
25°	2828.4
27.5°	2376.2
30°	1899.3
32.5°	1338.6
35°	748.2
37.5°	429.2
40°	240.1
42.5°	126.6
45°	59.2
47.5°	34.5
50°	29.6
52.5°	26.3
55°	24.7
57.5°	23.0
60°	19.7
62.5°	18.1
65°	16.4
67.5°	14.8
70°	13.2
72.5°	13.2
75°	11.5
77.5°	11.5
80°	9.9
82.5°	9.9
85°	8.2
87.5°	4.9
90°	0.0

(END OF REPORT)