

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366363

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-WMH-BTR94**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366363
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-33)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-WMH-BTR94
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM GLASS, TEMPERED CLEAR 0.187", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3871.0 lumens
Efficiency: N/A
Efficacy: 70.3 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366363

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-WMH-BTR94

Luminous Intensity Polar Plot

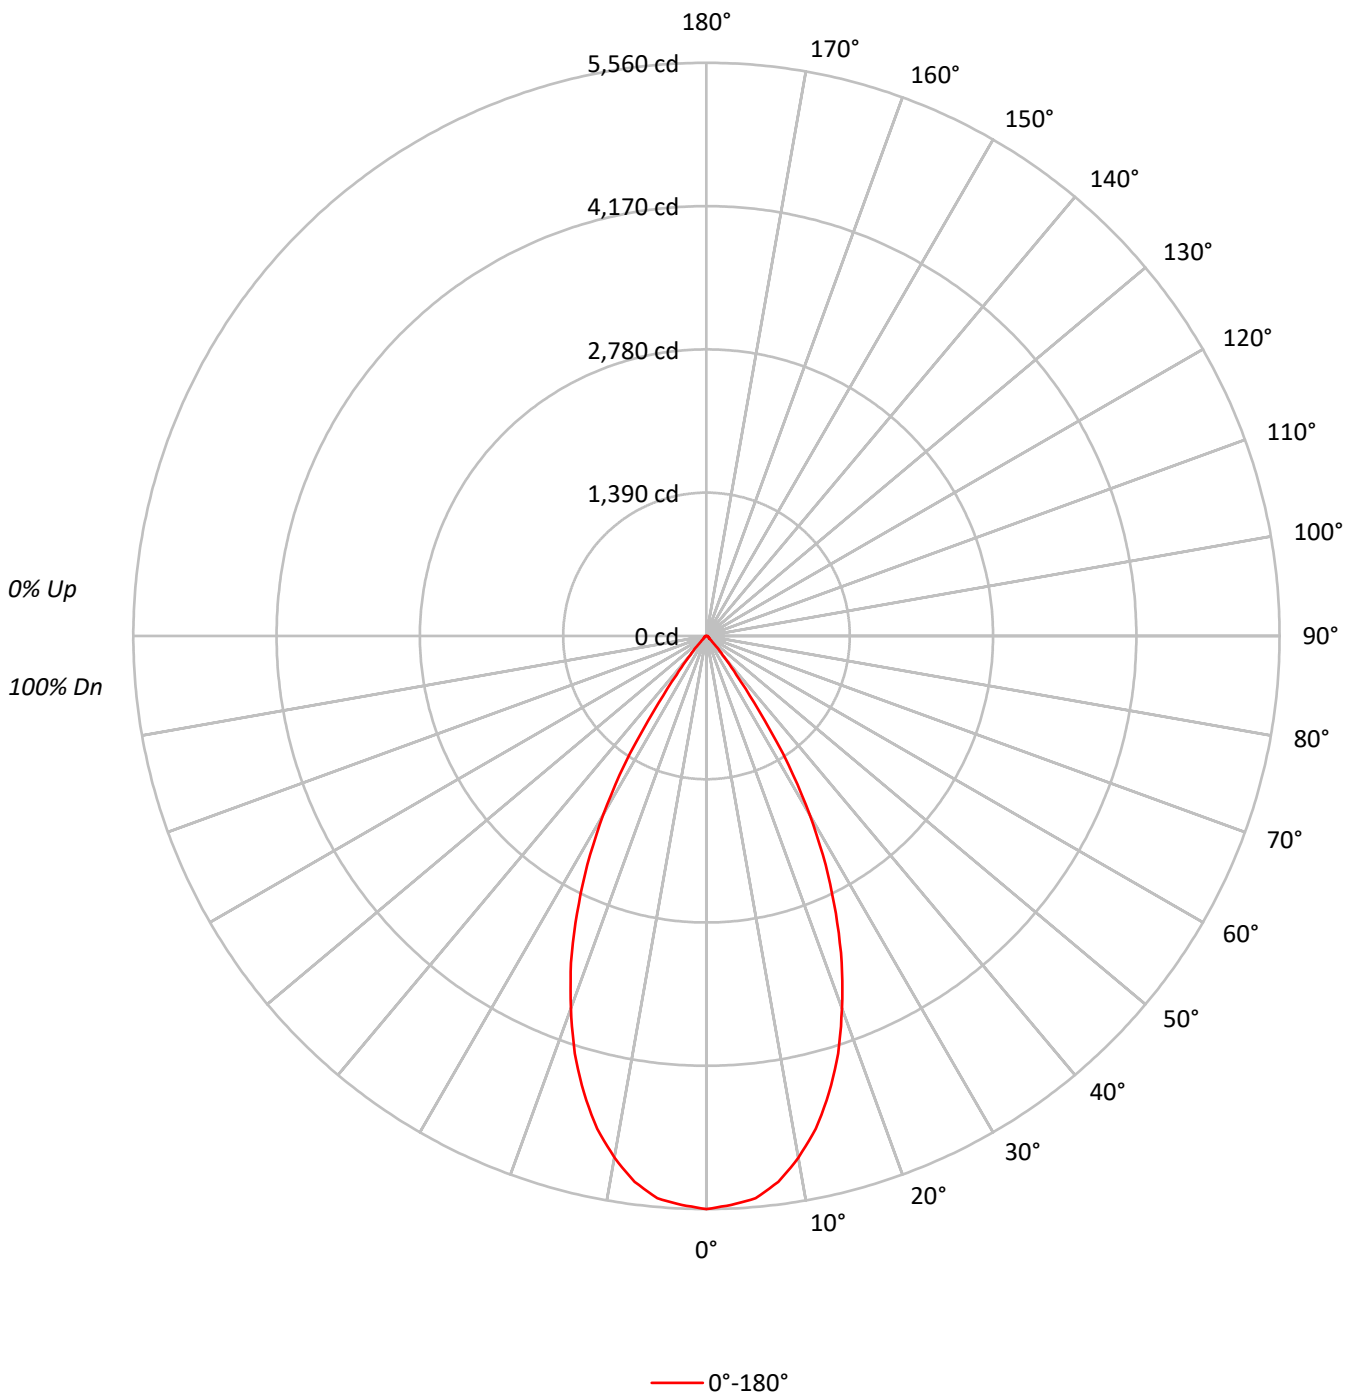



TEST NUMBER: P366363

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-WMH-BTR94

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	92	90	88
3	104	98	93	89	102	96	92	88	94	90	87		91	88	86		89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85	82	79	78
5	94	87	81	77	93	86	81	77	84	80	76		82	78	75		81	77	75	73
6	90	82	76	72	89	81	76	72	80	75	72		78	74	71		77	73	71	69
7	86	78	72	68	85	77	72	68	76	71	67		74	70	67		73	70	67	65
8	82	74	68	64	81	73	68	64	72	67	64		71	67	63		70	66	63	62
9	79	70	64	61	78	69	64	61	68	64	60		68	63	60		67	63	60	59
10	76	66	61	57	75	66	61	57	65	61	57		65	60	57		64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	398092
5°	393589
10°	373653
15°	340276
20°	292848
25°	234610
30°	165523
35°	76658
40°	24928
45°	7959
50°	3810
55°	3420
60°	3179
65°	2897
70°	2868
75°	3790
80°	4247
85°	6983



TEST NUMBER: P366363

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-WMH-BTR94

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	511.7	13.2
10°-20°	1273.1	32.9
20°-30°	1343.5	34.7
30°-40°	601.2	15.5
40°-50°	78.7	2.0
50°-60°	24.3	0.6
60°-70°	17.1	0.4
70°-80°	13.6	0.4
80°-90°	7.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3128.2	80.8
0°-40°	3729.4	96.3
0°-60°	3832.4	99.0
0°-90°	3871.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3871.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5560	
5°	5476	512
15°	4590	1273
25°	2970	1343
35°	877	601
45°	79	79
55°	27	24
65°	17	17
75°	14	14
85°	8	8
90°	0	



TEST NUMBER: P366363

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8030-F6LBXVM1-WMH-BTR94

CANDELA DISTRIBUTION (FULL):

0°	
0°	5559.8
2.5°	5523.8
5°	5476.0
7.5°	5340.9
10°	5139.2
12.5°	4898.1
15°	4590.4
17.5°	4248.5
20°	3843.3
22.5°	3431.2
25°	2969.6
27.5°	2502.9
30°	2002.0
32.5°	1484.0
35°	877.0
37.5°	477.0
40°	266.7
42.5°	148.7
45°	78.6
47.5°	41.0
50°	34.2
52.5°	29.1
55°	27.4
57.5°	23.9
60°	22.2
62.5°	18.8
65°	17.1
67.5°	15.4
70°	13.7
72.5°	13.7
75°	13.7
77.5°	12.0
80°	10.3
82.5°	10.3
85°	8.5
87.5°	5.1
90°	0.0

(END OF REPORT)