

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365645

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-MW-BL84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365645
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-36)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-MW-BL84
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.125", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4016.0 lumens
Efficiency: N/A
Efficacy: 72.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.95
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365645

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-MW-BL84

Luminous Intensity Polar Plot

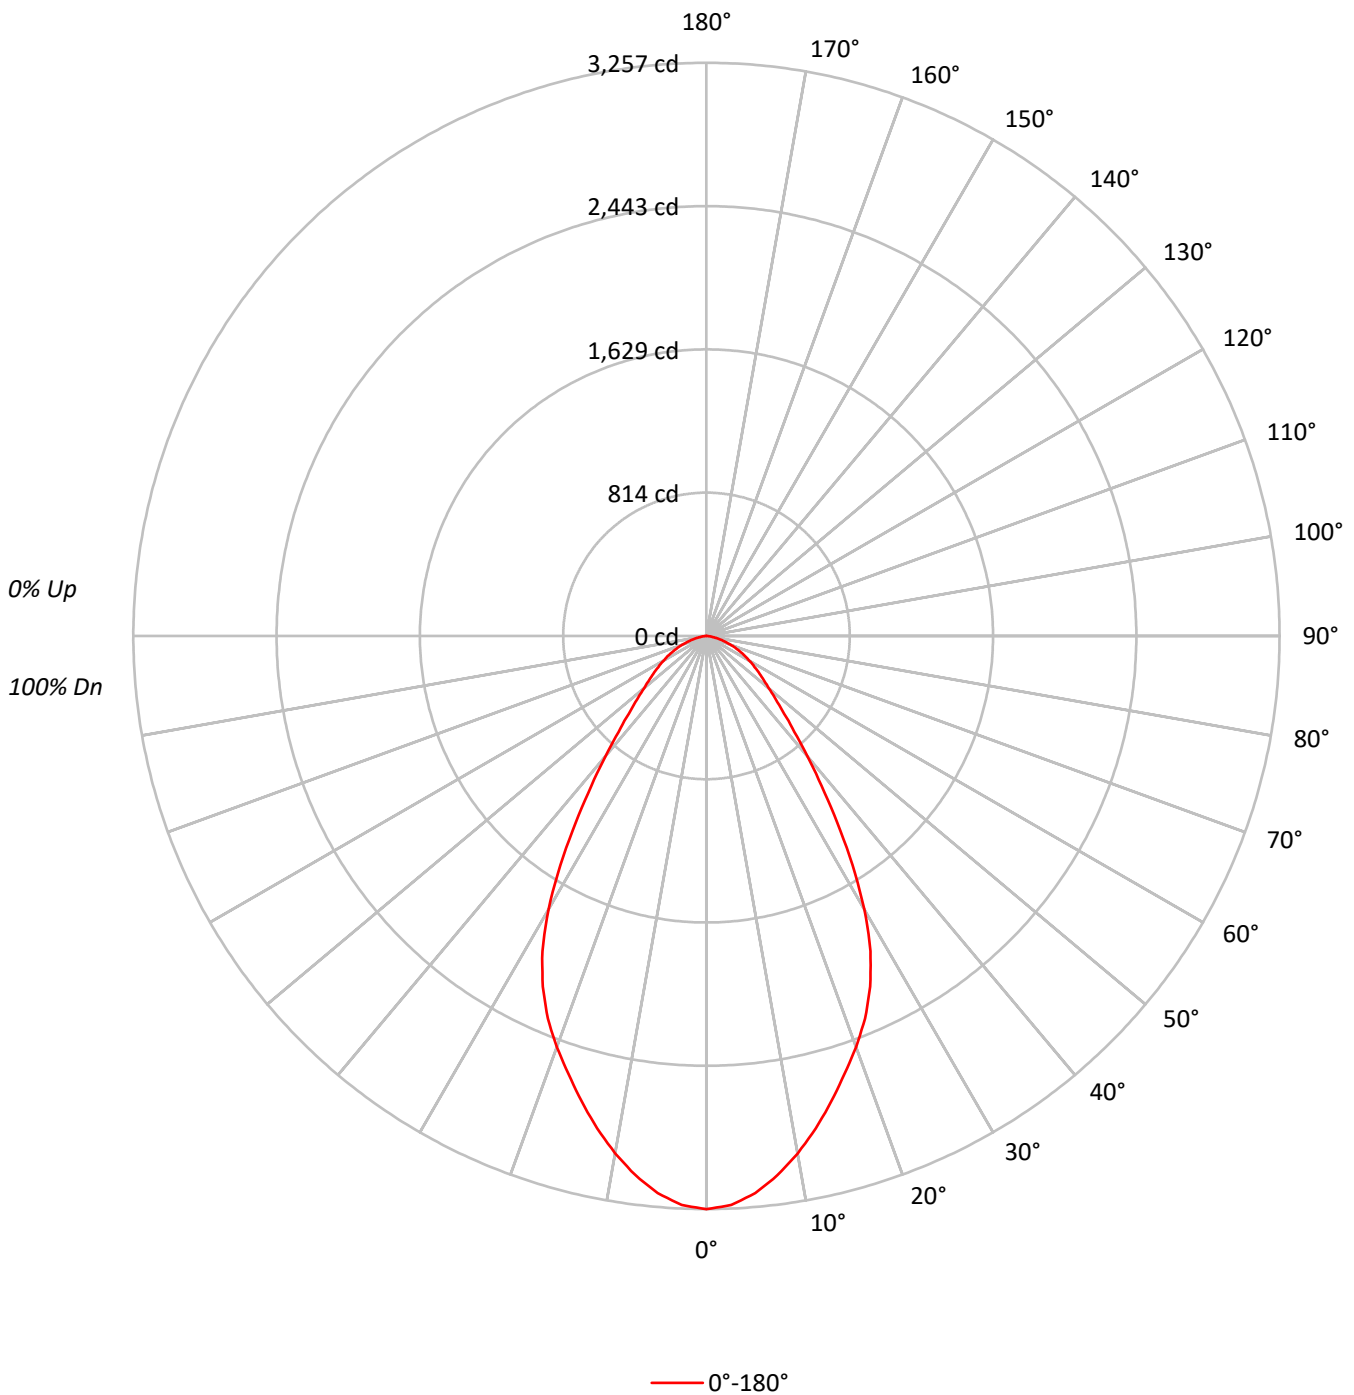



TEST NUMBER: P365645

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-MW-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97		98	96	95		95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86		90	87	84		87	84	82	80
3	97	89	83	78	95	88	82	77	85	80	76		82	78	75		80	77	74	72
4	91	82	75	70	89	80	74	69	78	73	68		76	71	67		74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62		70	65	61		69	64	61	59
6	80	69	62	57	78	68	62	57	67	61	56		65	60	56		64	59	55	54
7	75	64	57	52	74	64	57	52	62	56	52		61	55	51		60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	47		57	51	47		56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44		53	48	44		52	47	44	42
10	64	52	46	41	62	52	45	41	51	45	41		50	45	41		49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	88974
5°	87161
10°	82797
15°	77459
20°	72267
25°	66306
30°	56622
35°	43166
40°	31789
45°	24128
50°	19645
55°	17282
60°	15439
65°	13644
70°	11564
75°	9024
80°	6040
85°	2727



TEST NUMBER: P365645

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-MW-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	297.2	7.4
10°-20°	768.7	19.1
20°-30°	999.0	24.9
30°-40°	814.0	20.3
40°-50°	494.1	12.3
50°-60°	327.0	8.1
60°-70°	209.8	5.2
70°-80°	92.6	2.3
80°-90°	13.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2064.8	51.4
0°-40°	2878.8	71.7
0°-60°	3699.9	92.1
0°-90°	4016.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4016.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3257	
5°	3179	297
15°	2739	769
25°	2200	999
35°	1294	814
45°	625	494
55°	363	327
65°	211	210
75°	86	93
85°	9	14
90°	0	



TEST NUMBER: P365645

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-MW-BL84

CANDELA DISTRIBUTION (FULL):

0°	
0°	3257.3
2.5°	3236.3
5°	3178.8
7.5°	3091.5
10°	2985.1
12.5°	2866.5
15°	2739.1
17.5°	2608.3
20°	2486.1
22.5°	2353.5
25°	2200.0
27.5°	2018.6
30°	1795.2
32.5°	1544.0
35°	1294.5
37.5°	1073.0
40°	891.5
42.5°	739.7
45°	624.6
47.5°	533.9
50°	462.3
52.5°	408.2
55°	362.9
57.5°	321.0
60°	282.6
62.5°	246.0
65°	211.1
67.5°	178.0
70°	144.8
72.5°	113.4
75°	85.5
77.5°	61.1
80°	38.4
82.5°	20.9
85°	8.7
87.5°	1.7
90°	0.0

(END OF REPORT)