

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366367

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BL86**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366367
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BL86
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.250", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4498.9 lumens
Efficiency: N/A
Efficacy: 81.7 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366367

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BL86

Luminous Intensity Polar Plot

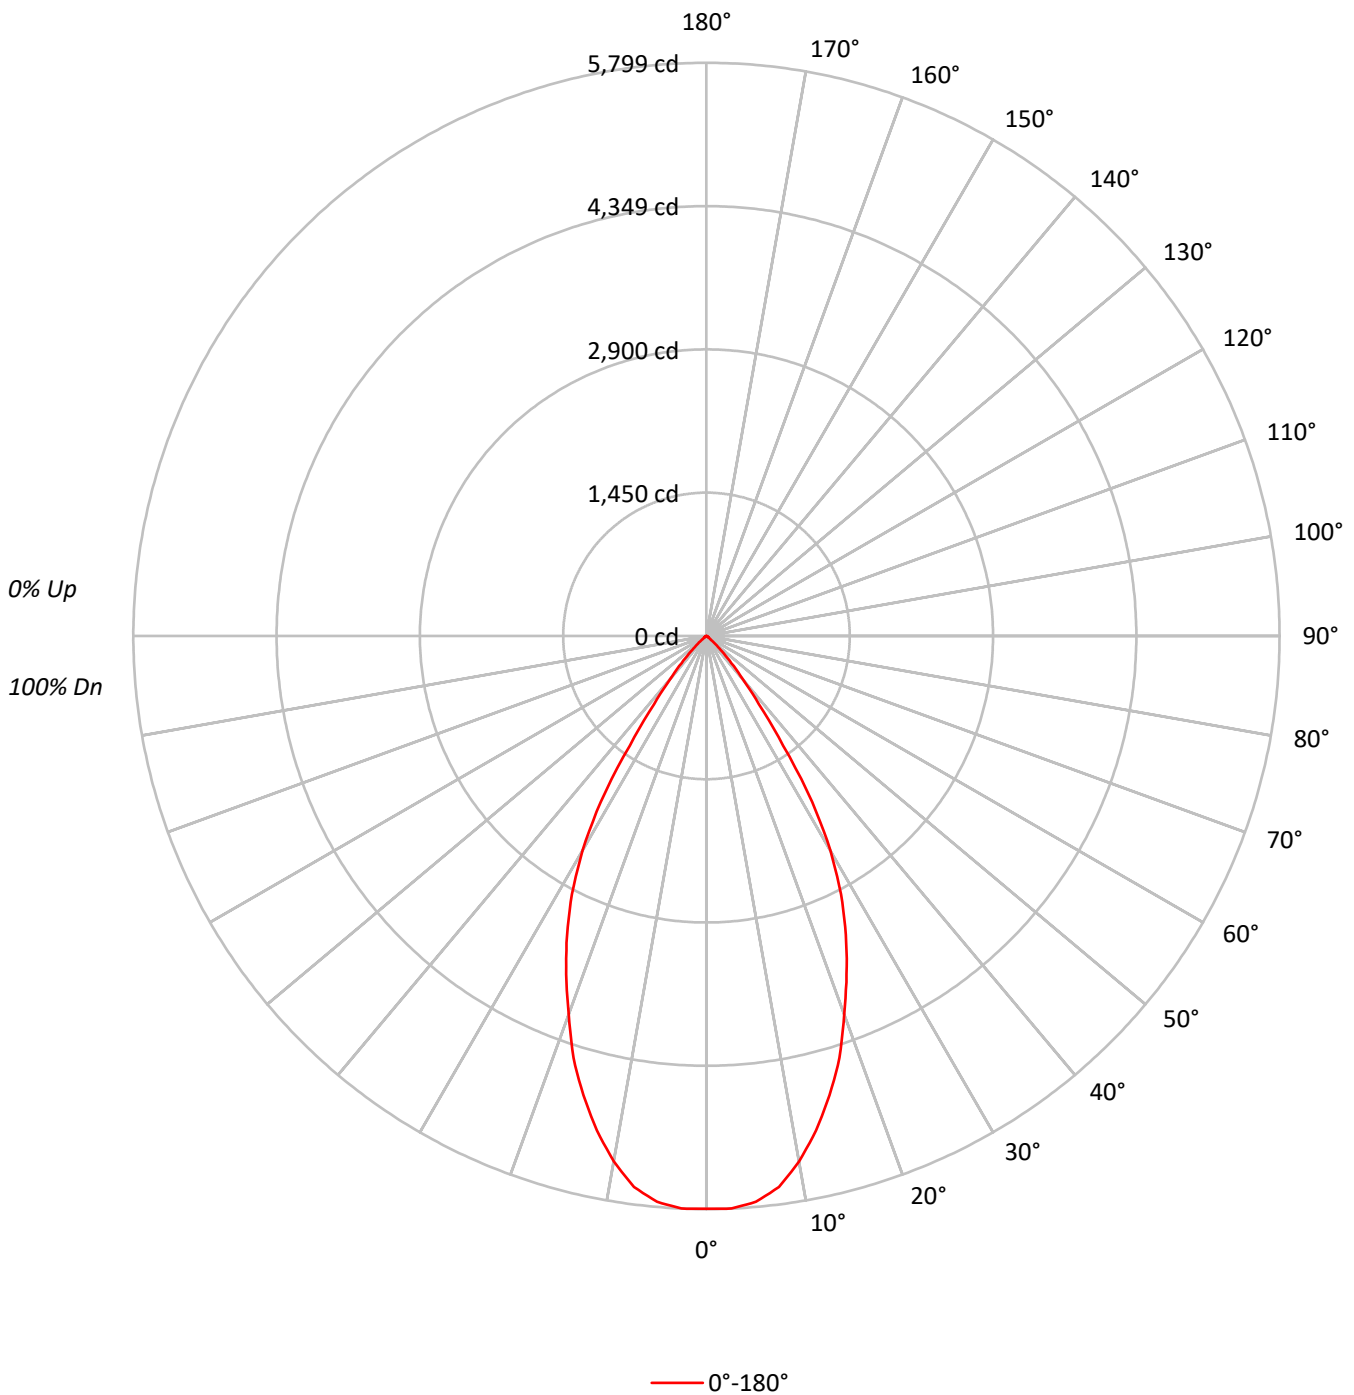



TEST NUMBER: P366367

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BL86

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75		81	77	74		80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		76	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65		73	68	65		72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62		69	65	61		68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58		66	61	58		65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	158273
5°	157605
10°	149717
15°	135996
20°	118340
25°	100610
30°	79143
35°	45157
40°	20318
45°	8553
50°	2698
55°	819
60°	563
65°	446
70°	407
75°	538
80°	267
85°	533



TEST NUMBER: P366367

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BL86

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	537.6	12.0
10°-20°	1337.7	29.7
20°-30°	1515.9	33.7
30°-40°	878.8	19.5
40°-50°	194.9	4.3
50°-60°	21.4	0.5
60°-70°	7.0	0.2
70°-80°	4.5	0.1
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3391.3	75.4
0°-40°	4270.1	94.9
0°-60°	4486.3	99.7
0°-90°	4498.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4498.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5794	
5°	5748	538
15°	4809	1338
25°	3338	1516
35°	1354	879
45°	221	195
55°	17	21
65°	7	7
75°	5	4
85°	2	1
90°	0	



TEST NUMBER: P366367

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BL86

CANDELA DISTRIBUTION (FULL):

0°	
0°	5794.3
2.5°	5799.4
5°	5747.9
7.5°	5622.6
10°	5397.8
12.5°	5124.9
15°	4809.1
17.5°	4476.1
20°	4071.1
22.5°	3705.5
25°	3338.2
27.5°	2946.9
30°	2509.2
32.5°	1992.6
35°	1354.2
37.5°	870.2
40°	569.8
42.5°	372.4
45°	221.4
47.5°	123.6
50°	63.5
52.5°	29.2
55°	17.2
57.5°	13.7
60°	10.3
62.5°	8.6
65°	6.9
67.5°	5.1
70°	5.1
72.5°	5.1
75°	5.1
77.5°	3.4
80°	1.7
82.5°	1.7
85°	1.7
87.5°	0.0
90°	0.0

(END OF REPORT)