

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366374

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR82**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P366374  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-32)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR82  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 5000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3747.0 lumens  
Efficiency: N/A  
Efficacy: 68.0 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.07  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 55.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P366374

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR82

### Luminous Intensity Polar Plot

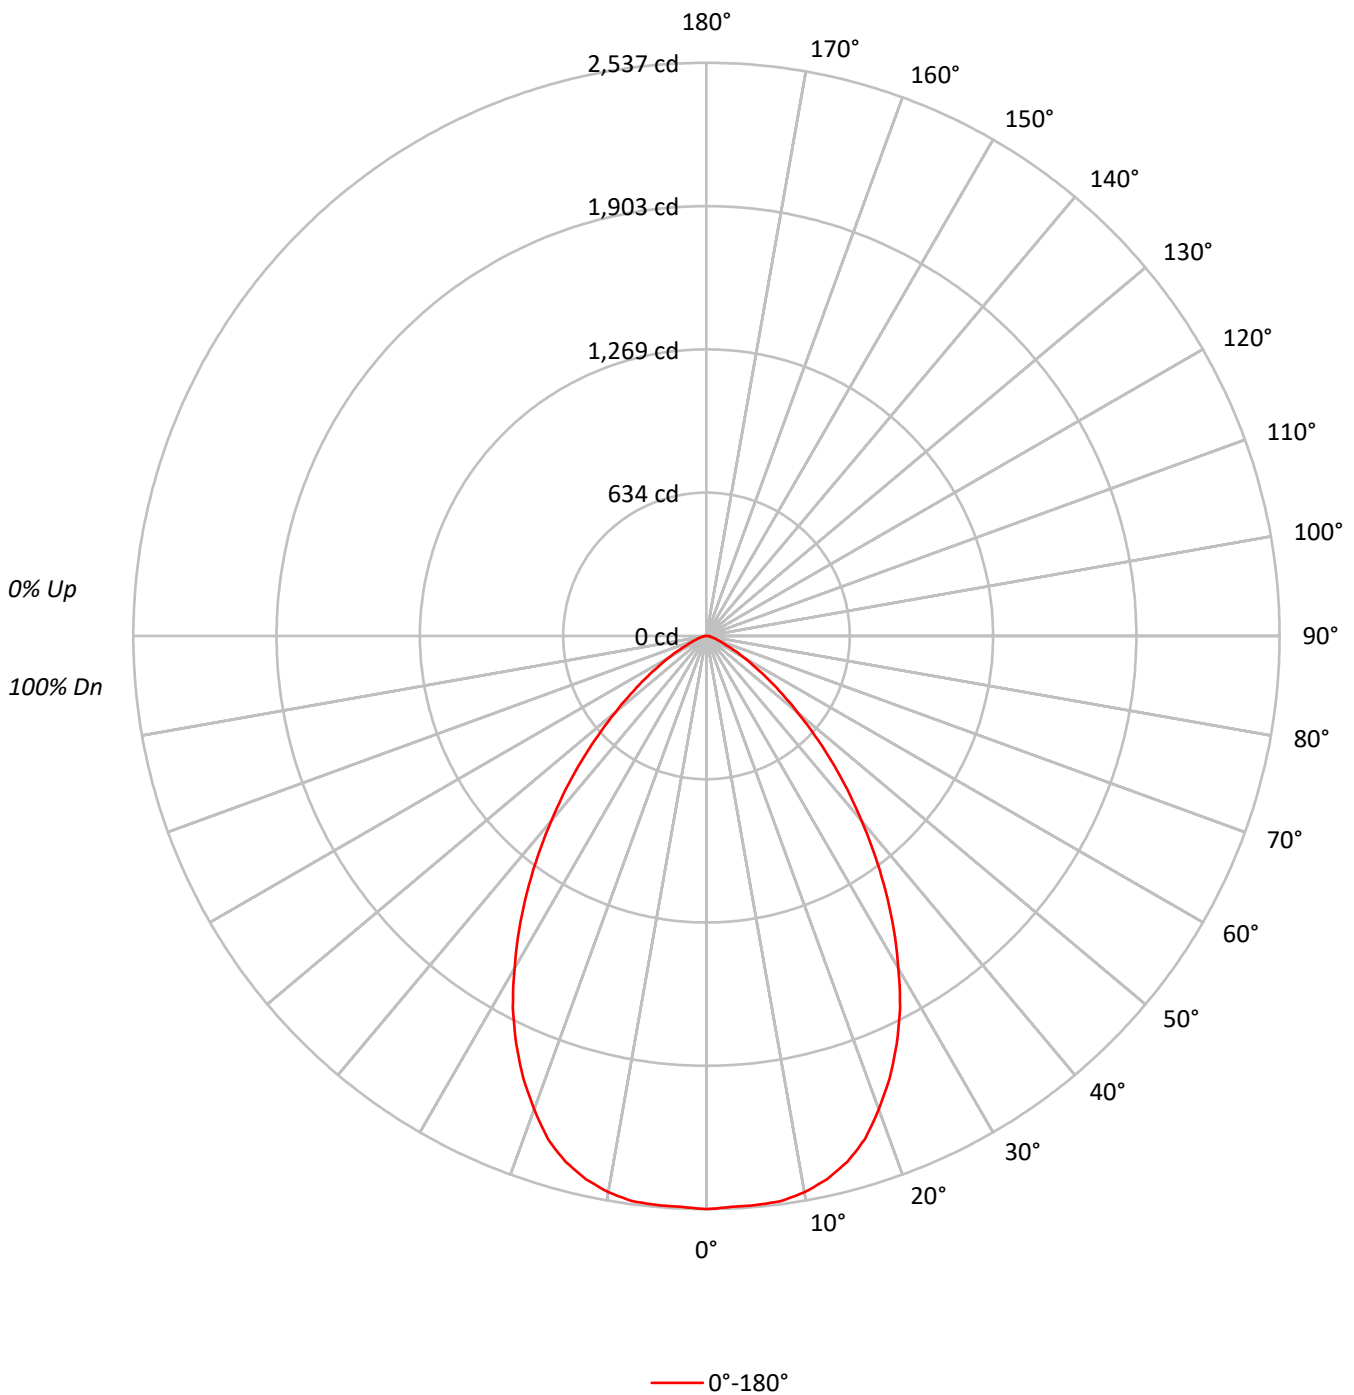



TEST NUMBER: P366374

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR82

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	106	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	60	52	47	69	59	52	47	58	52	47	57	51	47	55	50	47	45
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	181654
5°	181722
10°	181795
15°	178618
20°	169912
25°	157423
30°	140512
35°	120949
40°	99816
45°	78973
50°	58693
55°	41382
60°	27481
65°	16858
70°	10949
75°	8216
80°	7175
85°	8626



TEST NUMBER: P366374

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR82

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	240.6	6.4
10°-20°	674.6	18.0
20°-30°	910.7	24.3
30°-40°	861.7	23.0
40°-50°	604.0	16.1
50°-60°	303.9	8.1
60°-70°	107.4	2.9
70°-80°	33.5	0.9
80°-90°	10.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1825.9	48.7
0°-40°	2687.7	71.7
0°-60°	3595.6	96.0
0°-90°	3747.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3747.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2537	
5°	2528	241
15°	2410	675
25°	1993	911
35°	1384	862
45°	780	604
55°	332	304
65°	100	107
75°	30	34
85°	10	10
90°	0	



TEST NUMBER: P366374

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR82

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2537.0
2.5°	2530.0
5°	2528.3
7.5°	2523.1
10°	2500.4
12.5°	2463.7
15°	2409.6
17.5°	2334.6
20°	2229.9
22.5°	2118.3
25°	1992.6
27.5°	1856.5
30°	1699.5
32.5°	1544.2
35°	1383.7
37.5°	1224.9
40°	1067.9
42.5°	923.0
45°	779.9
47.5°	649.1
50°	526.9
52.5°	422.3
55°	331.5
57.5°	254.7
60°	191.9
62.5°	141.3
65°	99.5
67.5°	73.3
70°	52.3
72.5°	40.1
75°	29.7
77.5°	22.7
80°	17.4
82.5°	14.0
85°	10.5
87.5°	5.2
90°	0.0

(END OF REPORT)