

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366380

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366380
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-28)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM ACRYLIC, CLEAR 0.125", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4056.0 lumens
Efficiency: N/A
Efficacy: 73.6 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366380

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR89BV

Luminous Intensity Polar Plot

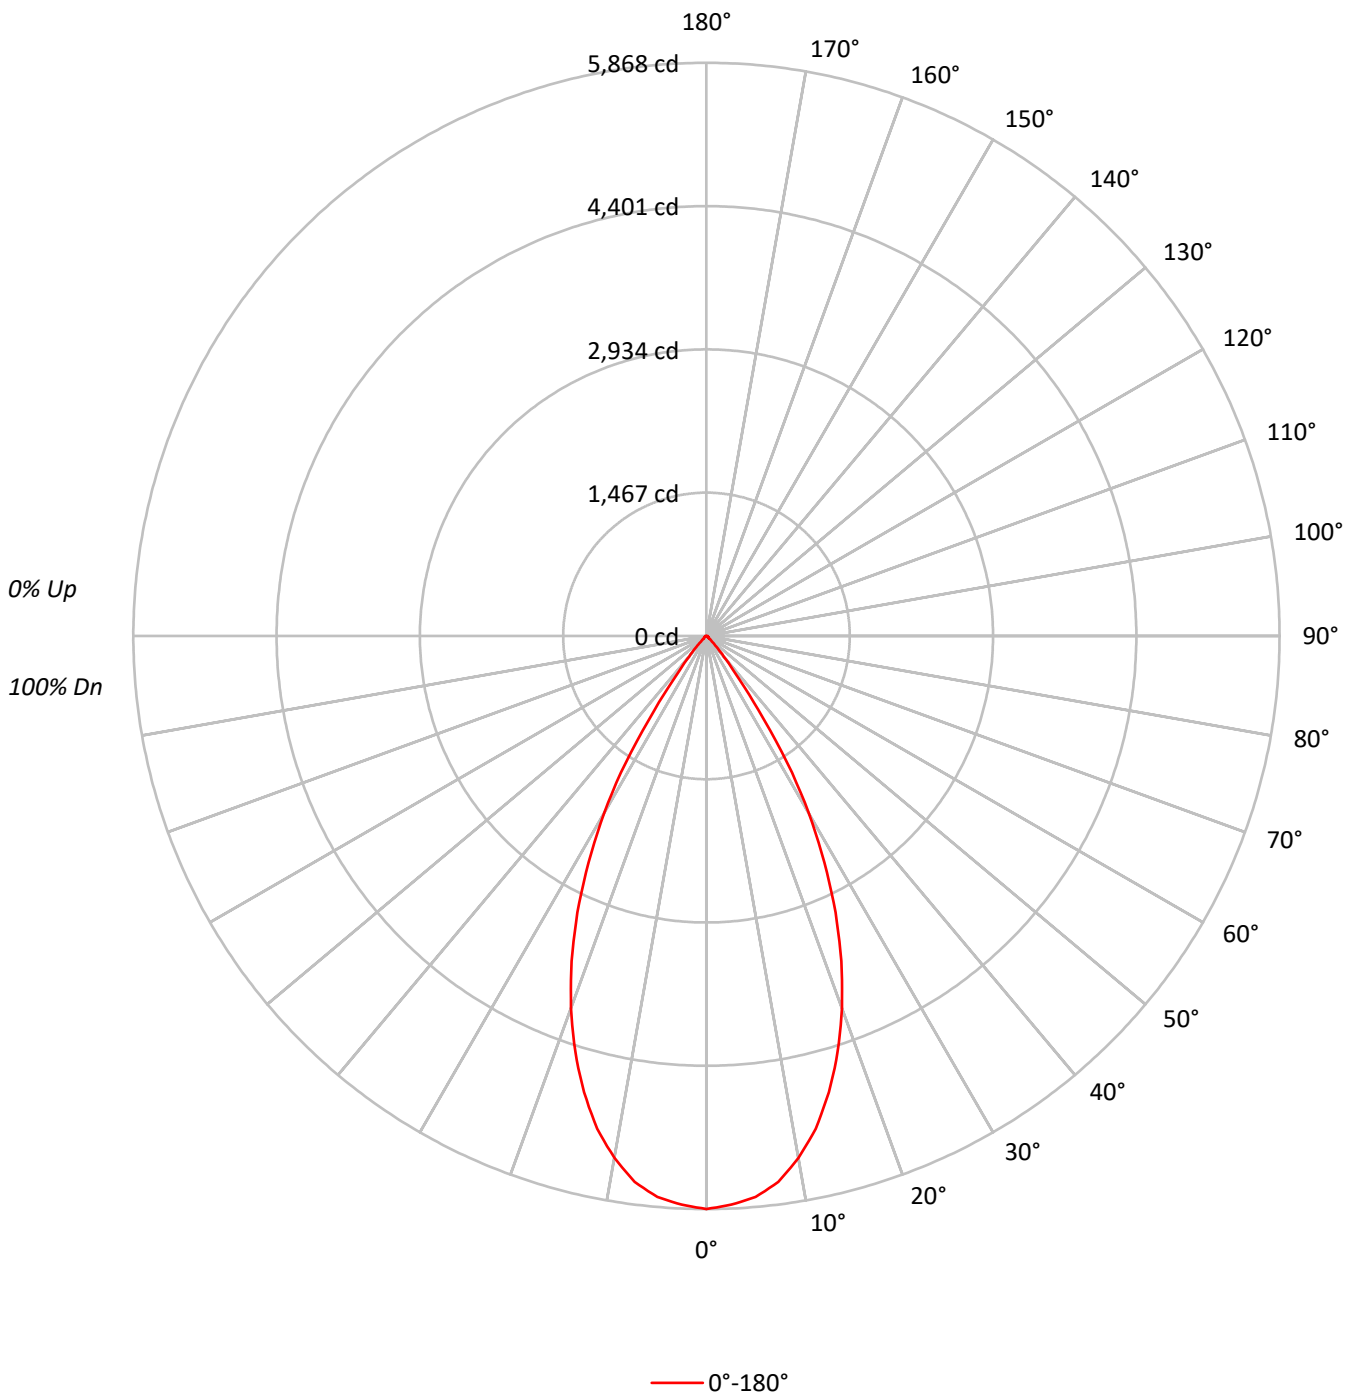



TEST NUMBER: P366380

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	74	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	420138
5°	414469
10°	394520
15°	358645
20°	308834
25°	246879
30°	173104
35°	80522
40°	25442
45°	7949
50°	3498
55°	3271
60°	2993
65°	2660
70°	2931
75°	3375
80°	4330
85°	7147



TEST NUMBER: P366380

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	539.8	13.3
10°-20°	1341.5	33.1
20°-30°	1410.4	34.8
30°-40°	625.7	15.4
40°-50°	78.3	1.9
50°-60°	23.4	0.6
60°-70°	16.4	0.4
70°-80°	12.9	0.3
80°-90°	7.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3291.7	81.2
0°-40°	3917.4	96.6
0°-60°	4019.1	99.1
0°-90°	4056.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4056.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5868	
5°	5766	540
15°	4838	1342
25°	3125	1410
35°	921	626
45°	78	78
55°	26	23
65°	16	16
75°	12	13
85°	9	8
90°	0	



TEST NUMBER: P366380

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8035-F6LBXVM1-WMH-BTR89BV

CANDELA DISTRIBUTION (FULL):

0°	
0°	5867.7
2.5°	5829.3
5°	5766.5
7.5°	5637.3
10°	5426.2
12.5°	5168.0
15°	4838.2
17.5°	4466.6
20°	4053.1
22.5°	3604.7
25°	3124.9
27.5°	2615.4
30°	2093.7
32.5°	1540.6
35°	921.2
37.5°	490.3
40°	272.2
42.5°	148.3
45°	78.5
47.5°	38.4
50°	31.4
52.5°	27.9
55°	26.2
57.5°	24.4
60°	20.9
62.5°	19.2
65°	15.7
67.5°	14.0
70°	14.0
72.5°	12.2
75°	12.2
77.5°	12.2
80°	10.5
82.5°	8.7
85°	8.7
87.5°	5.2
90°	0.0

(END OF REPORT)