

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365667

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-MW-BL89AM**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365667
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-40)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-MW-BL89AM
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS POLYCARBONATE, OPAL SMOOTH 0.125", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1789.0 lumens
Efficiency: N/A
Efficacy: 32.5 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.37
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365667

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-MW-BL89AM

Luminous Intensity Polar Plot

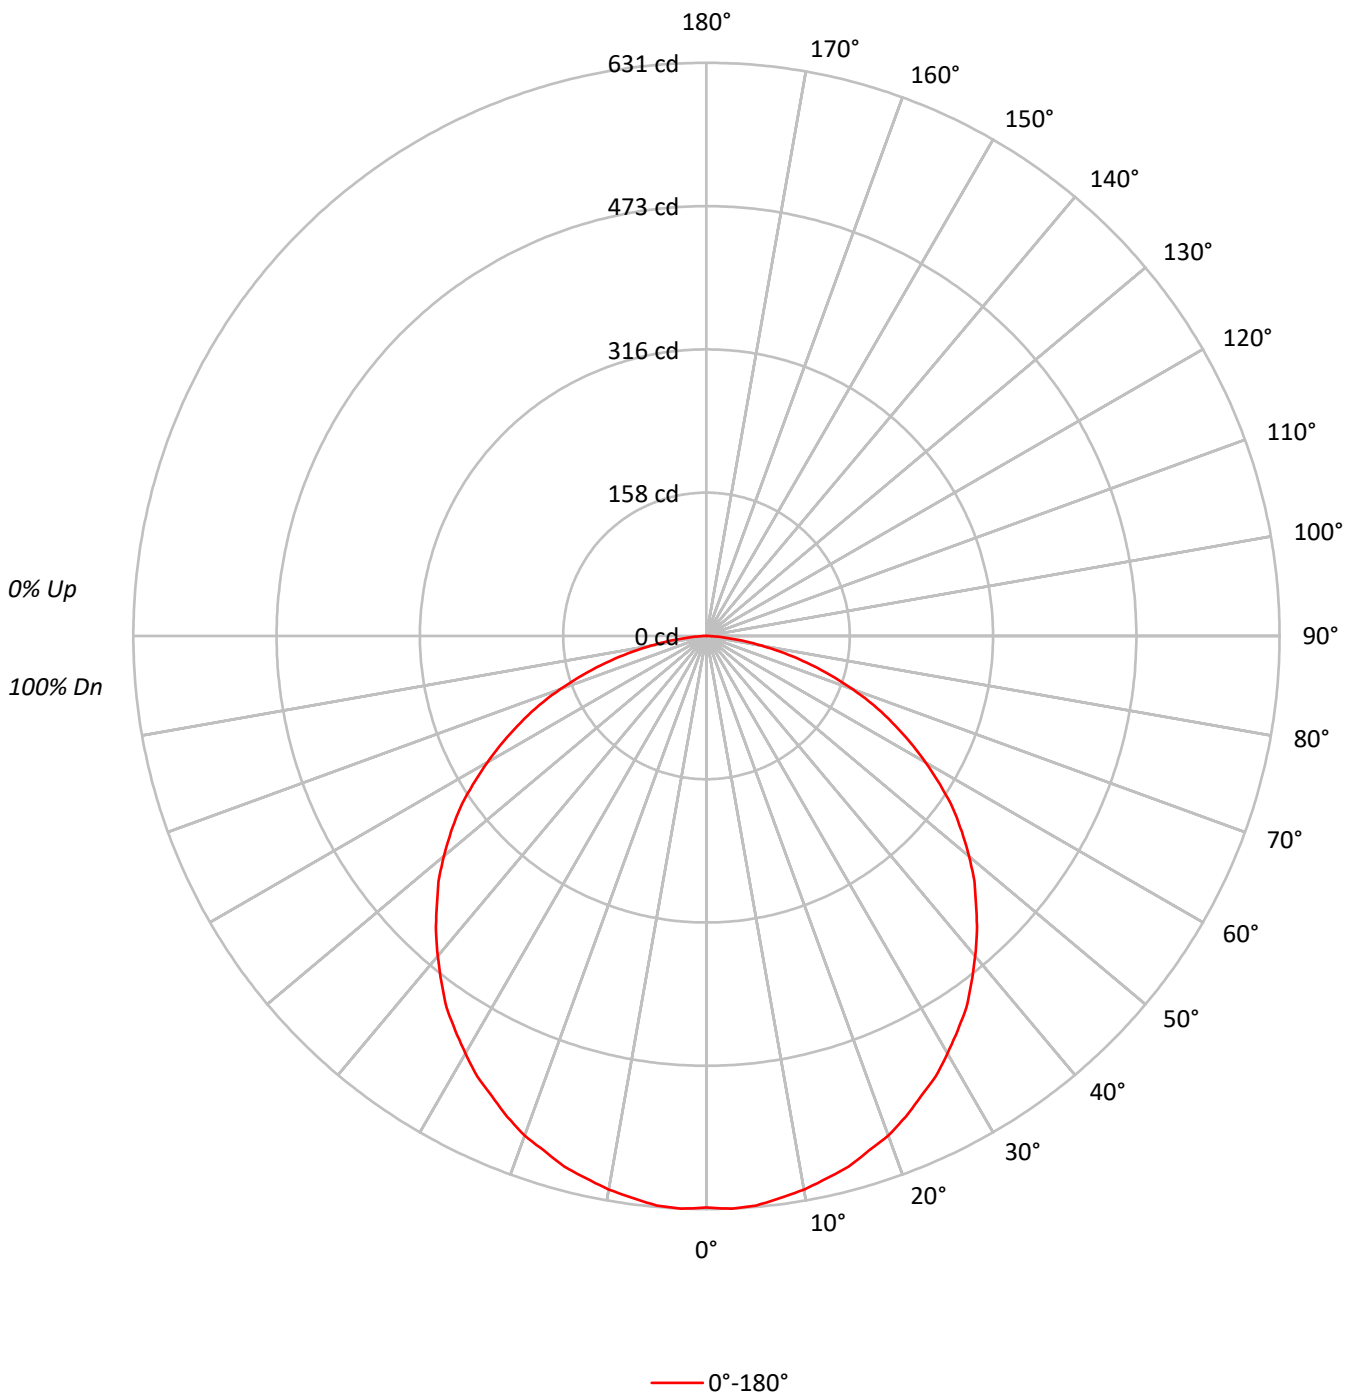



TEST NUMBER: P365667

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-MW-BL89AM

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	95	98	94	92	94	91	89	90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	75	82	78	74	79	75	72	70
3	90	80	71	65	88	78	70	64	75	69	63	72	67	62	70	65	61	59
4	82	70	62	55	80	69	61	55	67	59	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	46	58	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	51	45	40	38
7	65	51	42	36	63	50	42	36	49	41	36	47	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	35	29	55	42	34	29	41	34	29	40	33	29	39	33	29	27
10	53	40	32	26	52	39	31	26	38	31	26	37	31	26	36	30	26	24

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	17192
5°	17258
10°	17166
15°	17103
20°	17017
25°	16845
30°	16739
35°	16640
40°	16410
45°	16209
50°	16033
55°	15787
60°	15220
65°	14588
70°	13657
75°	12095
80°	9706
85°	5516



TEST NUMBER: P365667

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-MW-BL89AM

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.7	3.3
10°-20°	170.5	9.5
20°-30°	258.1	14.4
30°-40°	311.5	17.4
40°-50°	324.3	18.1
50°-60°	295.0	16.5
60°-70°	223.1	12.5
70°-80°	121.8	6.8
80°-90°	25.2	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	488.3	27.3
0°-40°	799.8	44.7
0°-60°	1419.0	79.3
0°-90°	1789.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1789.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	629	
5°	629	60
15°	605	171
25°	559	258
35°	499	311
45°	420	324
55°	332	295
65°	226	223
75°	115	122
85°	18	25
90°	0	



TEST NUMBER: P365667

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-MW-BL89AM

CANDELA DISTRIBUTION (FULL):

	0°
0°	629.4
2.5°	631.2
5°	629.4
7.5°	624.1
10°	618.9
12.5°	611.8
15°	604.8
17.5°	594.2
20°	585.4
22.5°	573.0
25°	558.9
27.5°	546.6
30°	530.7
32.5°	514.8
35°	499.0
37.5°	479.6
40°	460.2
42.5°	440.8
45°	419.6
47.5°	400.2
50°	377.3
52.5°	354.4
55°	331.5
57.5°	305.0
60°	278.6
62.5°	252.1
65°	225.7
67.5°	199.2
70°	171.0
72.5°	142.8
75°	114.6
77.5°	88.2
80°	61.7
82.5°	38.8
85°	17.6
87.5°	5.3
90°	0.0

(END OF REPORT)