

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366386

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BL87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366386
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BL87
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.375", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4362.1 lumens
Efficiency: N/A
Efficacy: 79.2 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366386

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BL87

Luminous Intensity Polar Plot

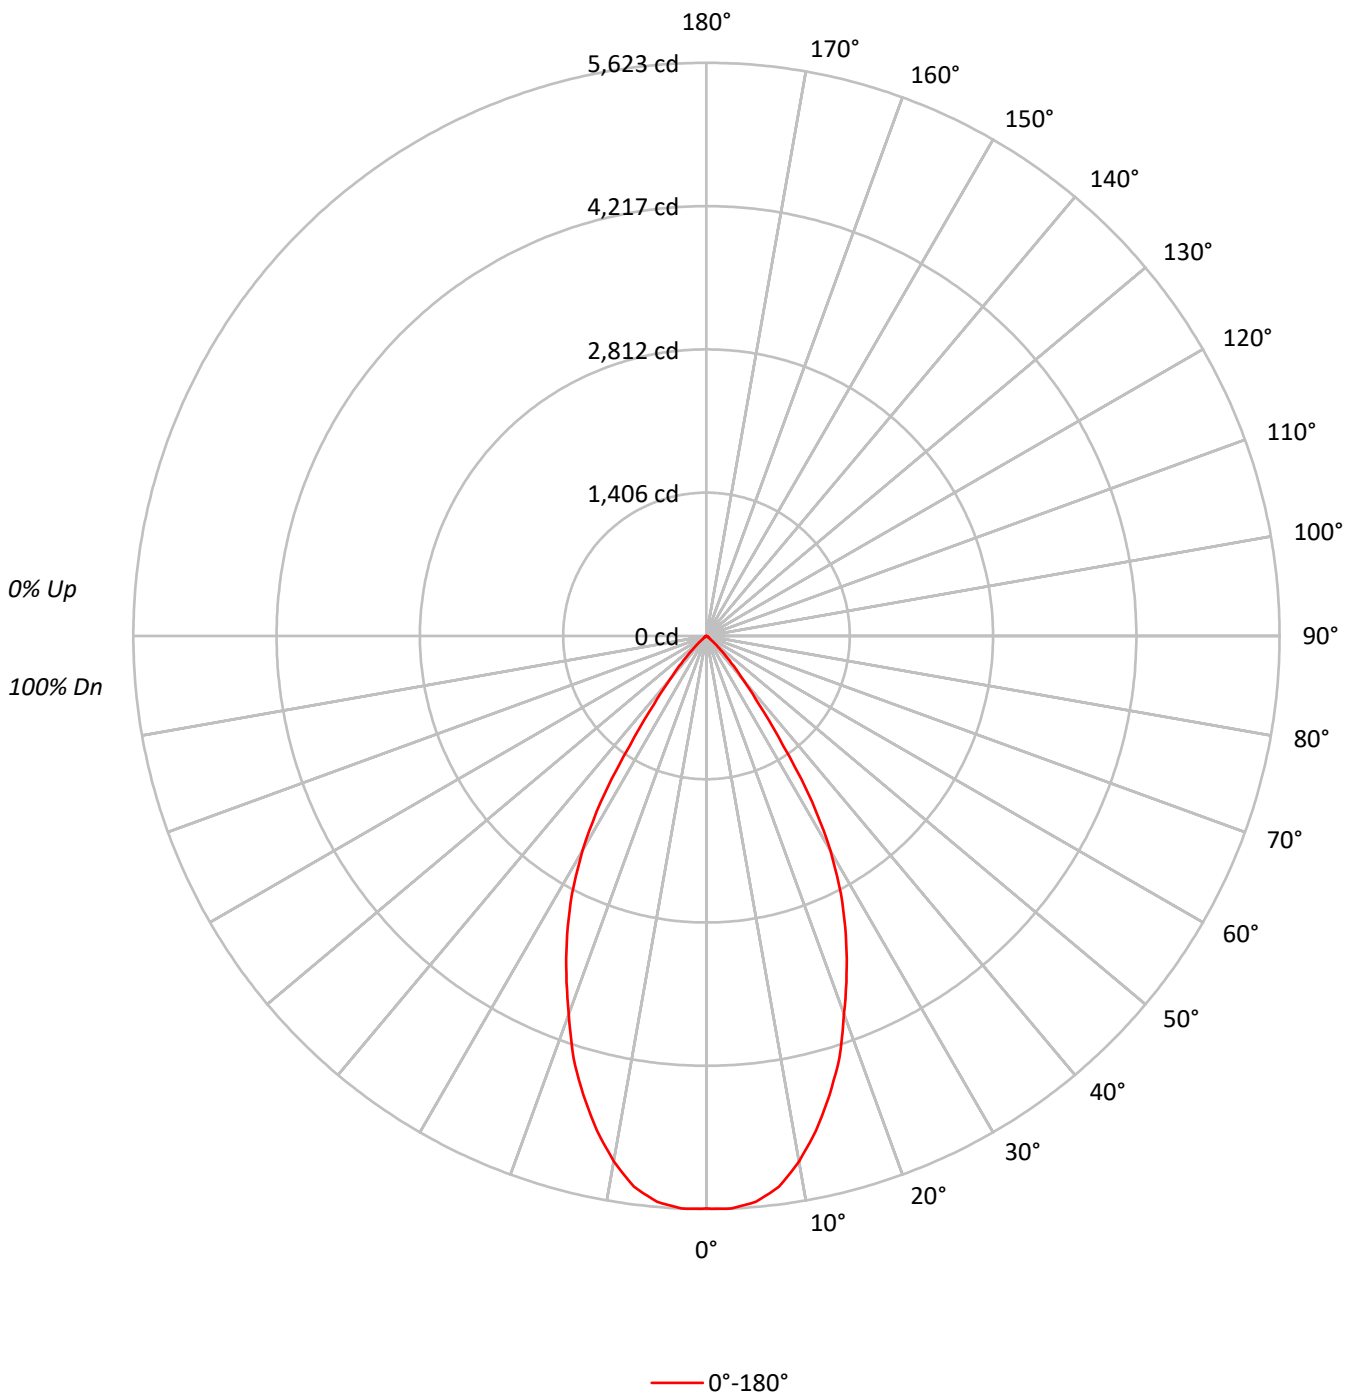



TEST NUMBER: P366386

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BL87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93		96	93	91		93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86		91	88	85		88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80		86	82	79		84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75		81	77	74		80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		76	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65		73	68	65		72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62		69	65	61		68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58		66	61	58		65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55		62	58	55		62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	153452
5°	152807
10°	145157
15°	131856
20°	114735
25°	97548
30°	76733
35°	43780
40°	19701
45°	8294
50°	2618
55°	791
60°	546
65°	433
70°	399
75°	528
80°	267
85°	533



TEST NUMBER: P366386

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BL87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	521.3	12.0
10°-20°	1297.0	29.7
20°-30°	1469.7	33.7
30°-40°	852.0	19.5
40°-50°	189.0	4.3
50°-60°	20.7	0.5
60°-70°	6.8	0.2
70°-80°	4.4	0.1
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3288.0	75.4
0°-40°	4140.1	94.9
0°-60°	4349.7	99.7
0°-90°	4362.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4362.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5618	
5°	5573	521
15°	4663	1297
25°	3237	1470
35°	1313	852
45°	215	189
55°	17	21
65°	7	7
75°	5	4
85°	2	1
90°	0	



TEST NUMBER: P366386

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BL87

CANDELA DISTRIBUTION (FULL):

0°	
0°	5617.8
2.5°	5622.8
5°	5572.9
7.5°	5451.4
10°	5233.4
12.5°	4968.8
15°	4662.7
17.5°	4339.8
20°	3947.1
22.5°	3592.7
25°	3236.6
27.5°	2857.2
30°	2432.8
32.5°	1932.0
35°	1312.9
37.5°	843.7
40°	552.5
42.5°	361.1
45°	214.7
47.5°	119.8
50°	61.6
52.5°	28.3
55°	16.6
57.5°	13.3
60°	10.0
62.5°	8.3
65°	6.7
67.5°	5.0
70°	5.0
72.5°	5.0
75°	5.0
77.5°	3.3
80°	1.7
82.5°	1.7
85°	1.7
87.5°	0.0
90°	0.0

(END OF REPORT)