

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366393

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BTR84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366393
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BTR84
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.125", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3926.0 lumens
Efficiency: N/A
Efficacy: 71.3 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366393

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BTR84

Luminous Intensity Polar Plot

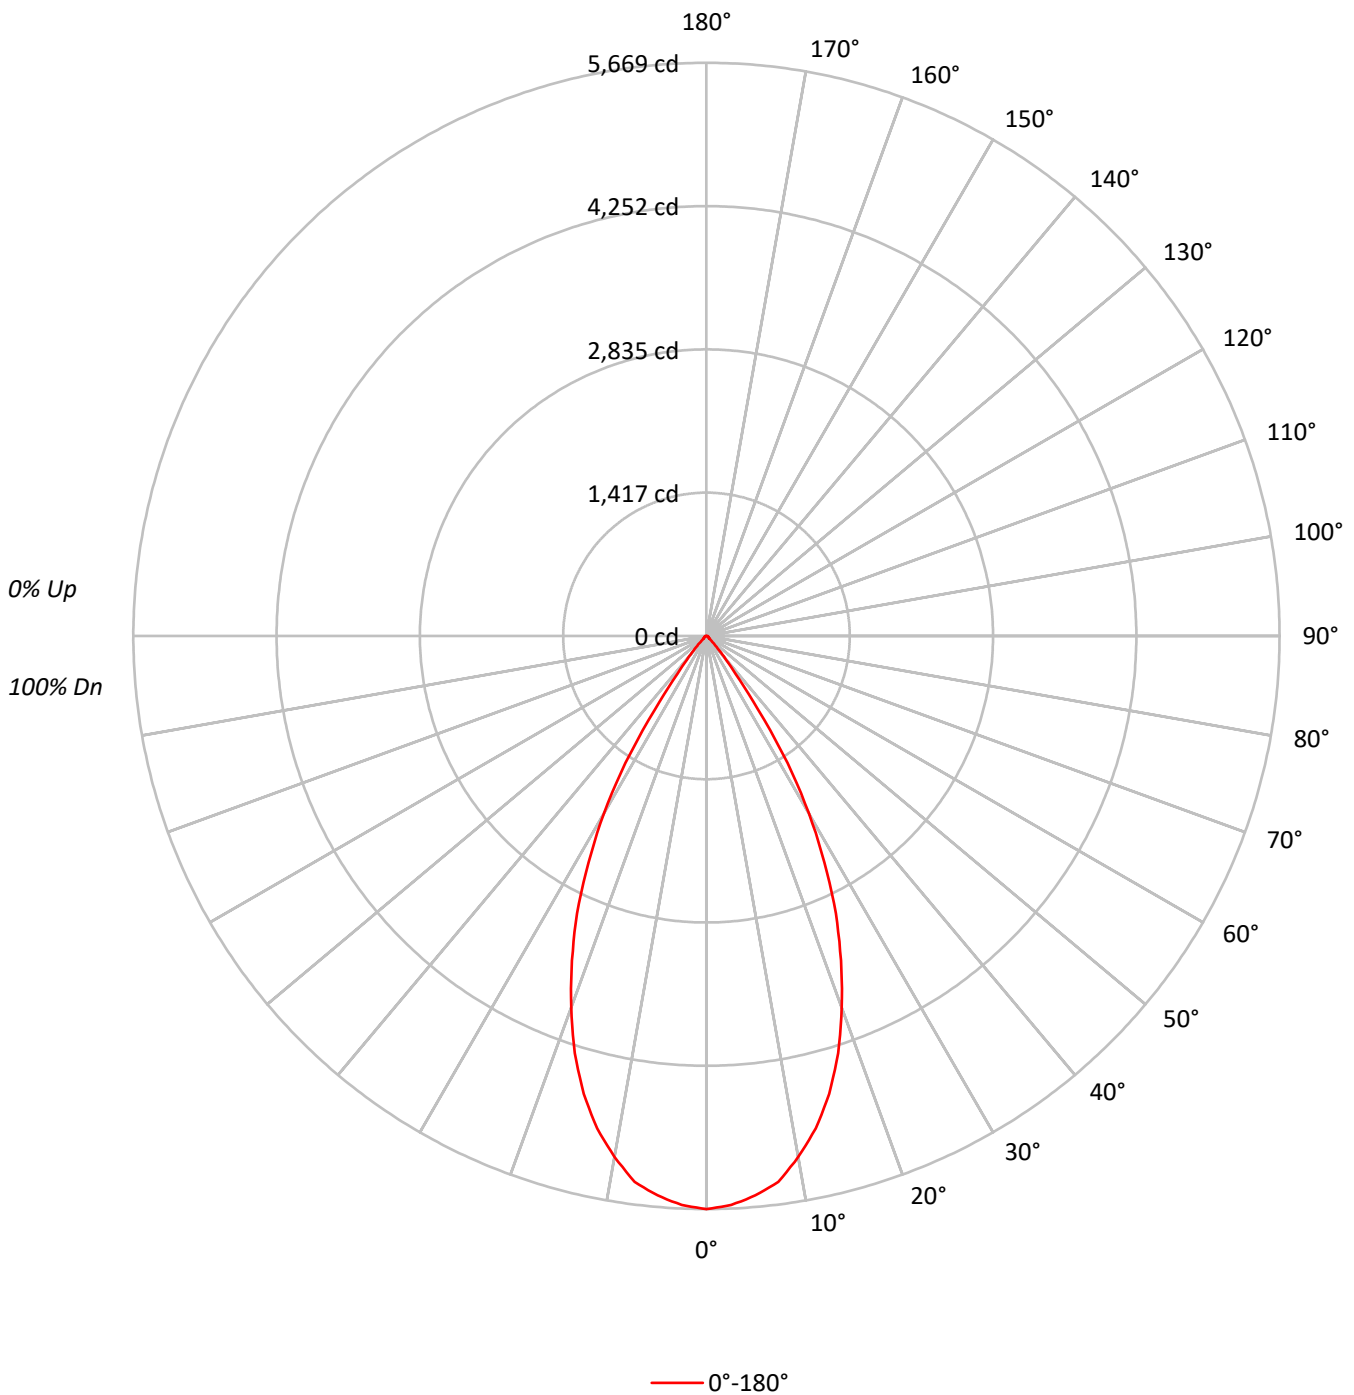



TEST NUMBER: P366393

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BTR84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87		91	88	86		89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76		82	79	76		81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72		78	74	71		77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68		75	70	67		73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64		71	67	64		70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60		68	63	60		67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57		65	60	57		64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	405904
5°	399225
10°	380393
15°	347600
20°	298083
25°	239176
30°	167697
35°	77480
40°	24872
45°	8030
50°	3732
55°	3296
60°	3279
65°	2982
70°	2952
75°	3403
80°	4371
85°	7230



TEST NUMBER: P366393

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BTR84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	520.9	13.3
10°-20°	1297.6	33.1
20°-30°	1362.7	34.7
30°-40°	604.7	15.4
40°-50°	78.1	2.0
50°-60°	24.4	0.6
60°-70°	17.2	0.4
70°-80°	12.6	0.3
80°-90°	7.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3181.3	81.0
0°-40°	3786.0	96.4
0°-60°	3888.6	99.0
0°-90°	3926.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3926.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5669	
5°	5554	521
15°	4689	1298
25°	3027	1363
35°	886	605
45°	79	78
55°	26	24
65°	18	17
75°	12	13
85°	9	8
90°	0	



TEST NUMBER: P366393

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8040-F6LBXVM1-WMH-BTR84

CANDELA DISTRIBUTION (FULL):

	0°
0°	5668.9
2.5°	5633.7
5°	5554.4
7.5°	5446.9
10°	5231.9
12.5°	4990.5
15°	4689.2
17.5°	4327.9
20°	3912.0
22.5°	3475.0
25°	3027.4
27.5°	2525.2
30°	2028.3
32.5°	1490.8
35°	886.4
37.5°	472.3
40°	266.1
42.5°	146.3
45°	79.3
47.5°	40.5
50°	33.5
52.5°	30.0
55°	26.4
57.5°	24.7
60°	22.9
62.5°	19.4
65°	17.6
67.5°	14.1
70°	14.1
72.5°	12.3
75°	12.3
77.5°	10.6
80°	10.6
82.5°	8.8
85°	8.8
87.5°	5.3
90°	0.0

(END OF REPORT)