

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366401

Luminaire Tested: **FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-WMH-BL84**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366401
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-47)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-WMH-BL84
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS POLYCARBONATE, CLEAR 0.125", 5000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4732.9 lumens
Efficiency: N/A
Efficacy: 85.9 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 55.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366401

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-WMH-BL84

Luminous Intensity Polar Plot

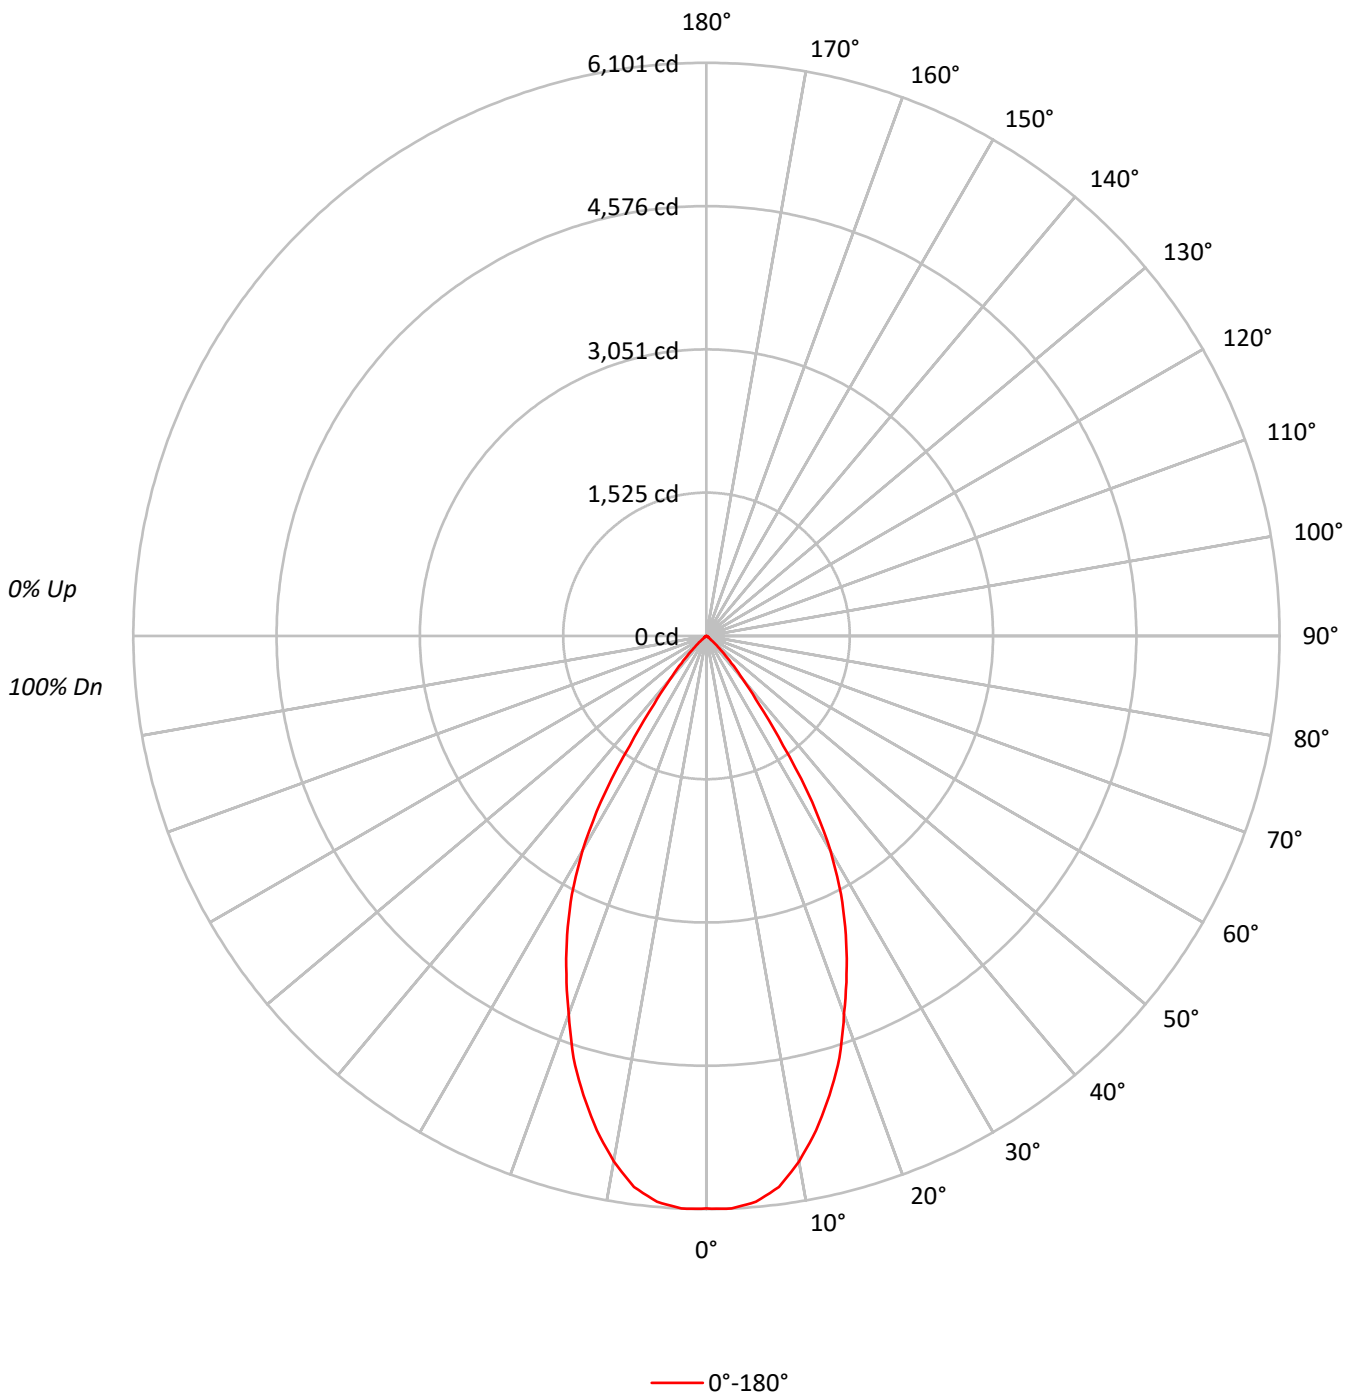



TEST NUMBER: P366401

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-WMH-BL84

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	108	104	100	97	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	96	91	88	93	89	86	91	88	85	88	86	84	82
4	98	91	86	82	96	90	85	81	88	83	80	86	82	79	84	81	78	77
5	93	85	80	76	92	85	79	75	83	78	75	81	77	74	80	76	73	72
6	89	80	75	71	88	80	74	70	78	73	70	77	73	69	76	72	69	68
7	85	76	70	66	83	75	70	66	74	69	65	73	68	65	72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62	69	65	61	68	64	61	60
9	77	68	62	58	76	67	62	58	66	62	58	66	61	58	65	61	58	56
10	74	64	59	55	73	64	59	55	63	58	55	62	58	55	62	58	55	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	166503
5°	165804
10°	157503
15°	143068
20°	124494
25°	105842
30°	83262
35°	47504
40°	21377
45°	8997
50°	2839
55°	862
60°	590
65°	465
70°	431
75°	570
80°	283
85°	564



TEST NUMBER: P366401

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-WMH-BL84

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	565.6	12.0
10°-20°	1407.3	29.7
20°-30°	1594.7	33.7
30°-40°	924.5	19.5
40°-50°	205.0	4.3
50°-60°	22.5	0.5
60°-70°	7.3	0.2
70°-80°	4.7	0.1
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3567.7	75.4
0°-40°	4492.2	94.9
0°-60°	4719.6	99.7
0°-90°	4732.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4732.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6096	
5°	6047	566
15°	5059	1407
25°	3512	1595
35°	1425	925
45°	233	205
55°	18	22
65°	7	7
75°	5	5
85°	2	1
90°	0	



TEST NUMBER: P366401

CATALOG NUMBER: FLD6BX50D010TE-FEU6B35-8050-F6LBXVM1-WMH-BL84

CANDELA DISTRIBUTION (FULL):

0°	
0°	6095.6
2.5°	6101.0
5°	6046.9
7.5°	5915.1
10°	5678.5
12.5°	5391.4
15°	5059.2
17.5°	4708.9
20°	4282.8
22.5°	3898.2
25°	3511.8
27.5°	3100.2
30°	2639.8
32.5°	2096.3
35°	1424.6
37.5°	915.4
40°	599.5
42.5°	391.8
45°	232.9
47.5°	130.0
50°	66.8
52.5°	30.7
55°	18.1
57.5°	14.4
60°	10.8
62.5°	9.0
65°	7.2
67.5°	5.4
70°	5.4
72.5°	5.4
75°	5.4
77.5°	3.6
80°	1.8
82.5°	1.8
85°	1.8
87.5°	0.0
90°	0.0

(END OF REPORT)