

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P364980

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-LI-BL85**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P364980  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-43)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-LI-BL85  
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,  
BOTTOM LENS POLYCARBONATE, CLEAR 0.187", 6000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5051.9 lumens  
Efficiency: N/A  
Efficacy: 87.0 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.82  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P364980

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-LI-BL85

### Luminous Intensity Polar Plot

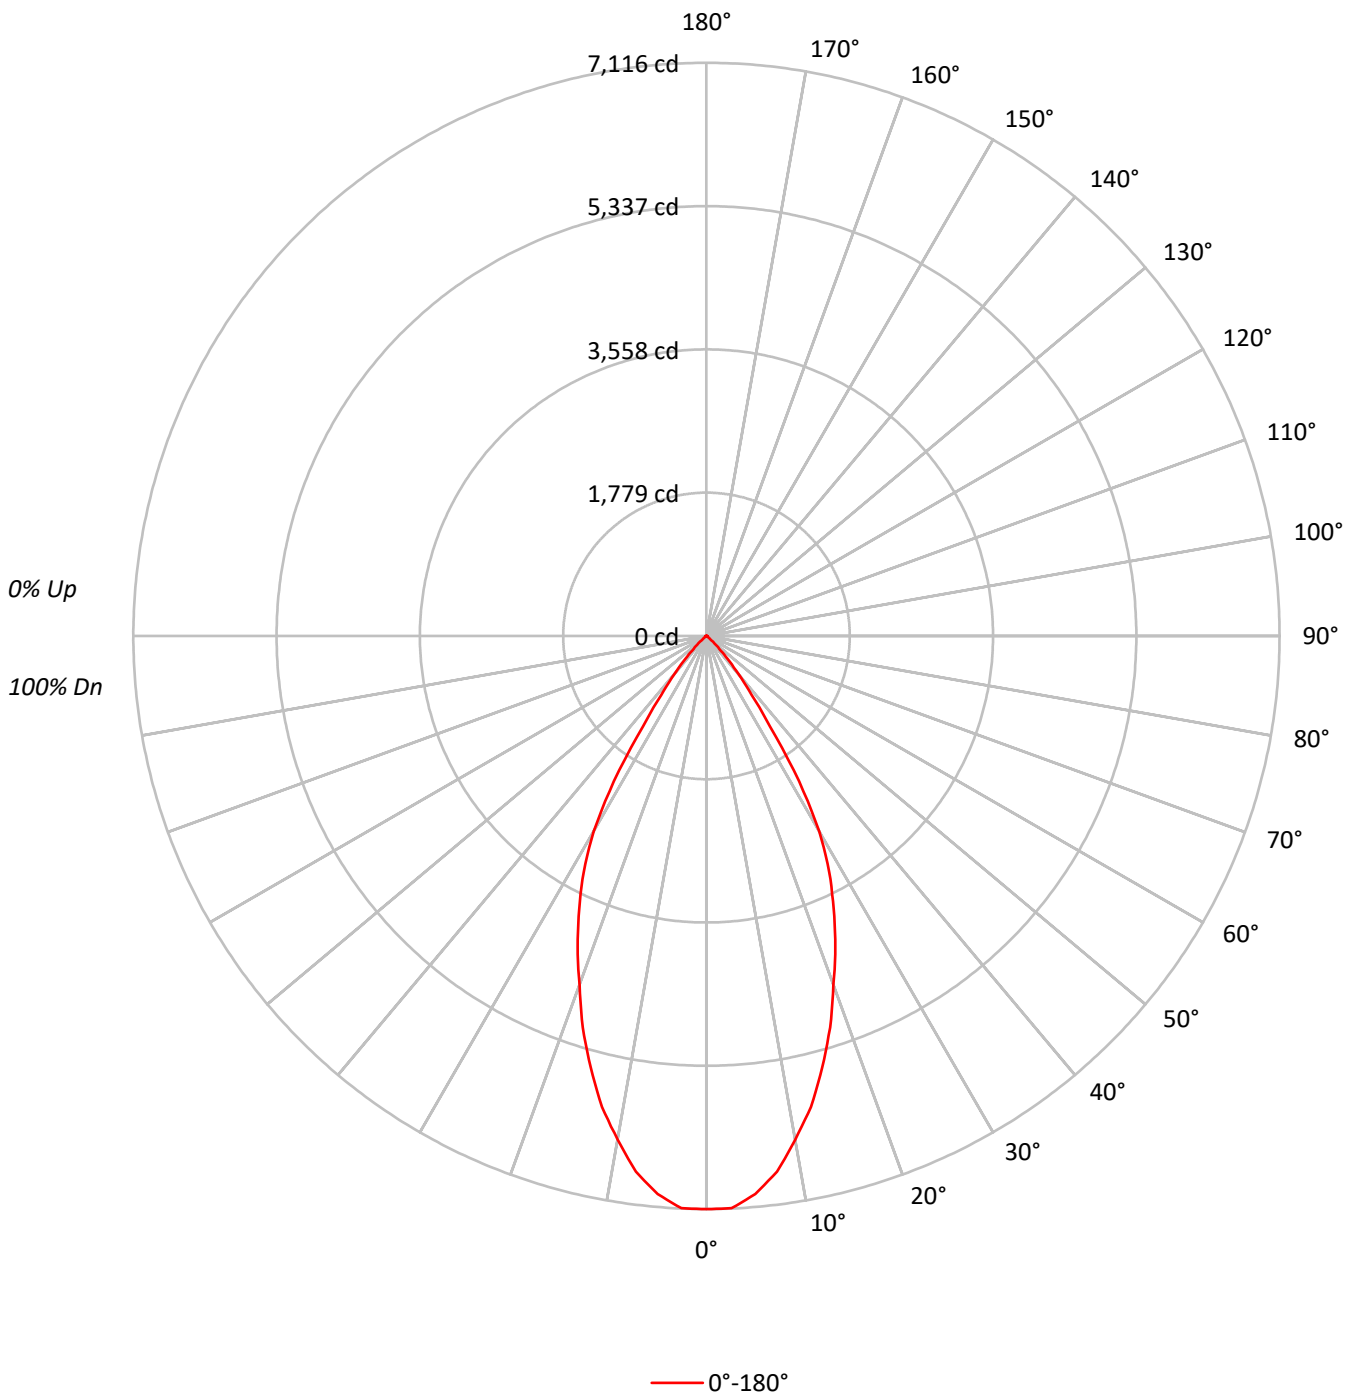



TEST NUMBER: P364980

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-LI-BL85

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87		91	88	85		89	86	84	83
4	99	91	86	82	97	90	85	82	88	84	81		86	83	80		84	81	79	77
5	94	86	80	76	92	85	80	76	83	79	75		82	78	75		80	77	74	73
6	90	81	75	71	88	80	75	71	79	74	71		77	73	70		76	73	70	68
7	85	77	71	67	84	76	71	67	75	70	66		74	69	66		72	69	66	64
8	82	72	67	63	80	72	67	63	71	66	63		70	65	62		69	65	62	61
9	78	69	63	59	77	68	63	59	67	62	59		66	62	59		66	62	59	57
10	74	65	60	56	74	65	60	56	64	59	56		63	59	56		63	58	56	54

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	194370
5°	190676
10°	176086
15°	156911
20°	134005
25°	112542
30°	88346
35°	45780
40°	21862
45°	8607
50°	2265
55°	633
60°	415
65°	368
70°	303
75°	401
80°	299
85°	595



TEST NUMBER: P364980

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-LI-BL85

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	644.8	12.8
10°-20°	1542.1	30.5
20°-30°	1702.6	33.7
30°-40°	936.9	18.5
40°-50°	198.0	3.9
50°-60°	16.7	0.3
60°-70°	5.2	0.1
70°-80°	3.8	0.1
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3889.6	77.0
0°-40°	4826.5	95.5
0°-60°	5041.2	99.8
0°-90°	5051.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5051.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7116	
5°	6954	645
15°	5549	1542
25°	3734	1703
35°	1373	937
45°	223	198
55°	13	17
65°	6	5
75°	4	4
85°	2	2
90°	0	



TEST NUMBER: P364980

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-LI-BL85

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7115.8
2.5°	7112.0
5°	6954.0
7.5°	6710.3
10°	6348.5
12.5°	5988.6
15°	5548.7
17.5°	5101.2
20°	4610.0
22.5°	4179.6
25°	3734.1
27.5°	3303.7
30°	2801.0
32.5°	2138.4
35°	1372.9
37.5°	925.4
40°	613.1
42.5°	382.7
45°	222.8
47.5°	114.2
50°	53.3
52.5°	22.8
55°	13.3
57.5°	9.5
60°	7.6
62.5°	5.7
65°	5.7
67.5°	3.8
70°	3.8
72.5°	5.7
75°	3.8
77.5°	1.9
80°	1.9
82.5°	1.9
85°	1.9
87.5°	1.9
90°	0.0

(END OF REPORT)