

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366425

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BL89BW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P366425  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-46)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BL89BW  
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, WARM HAZE REFLECTOR, BOTTOM LENS ACRYLIC OPAL SMOOTH, CLEAR 0.125", 6000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3854.0 lumens  
Efficiency: N/A  
Efficacy: 66.3 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.36  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P366425

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BL89BW

### Luminous Intensity Polar Plot

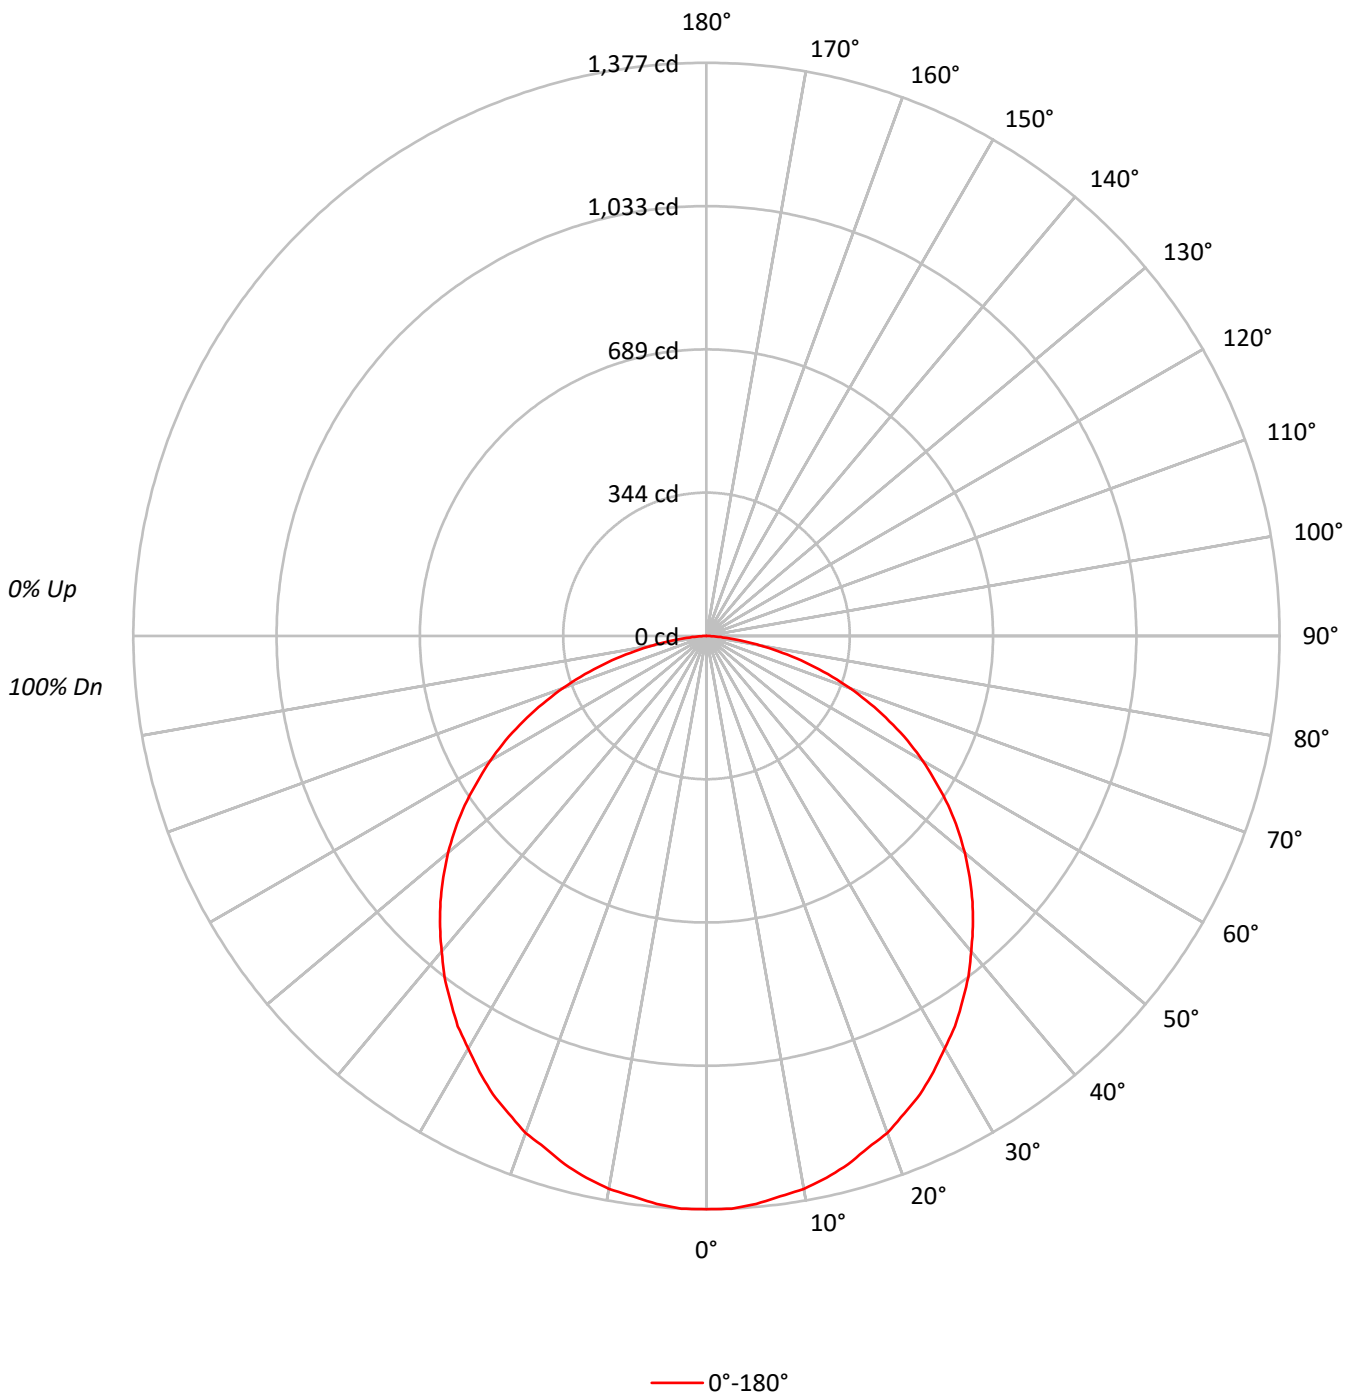



TEST NUMBER: P366425

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BL89BW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	95	98	94	92	94	91	89	90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	76	82	78	74	79	75	72	70
3	90	80	72	65	88	78	71	64	75	69	63	72	67	62	70	65	61	59
4	83	71	62	55	80	69	61	55	67	60	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	47	58	51	46	56	50	46	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	51	45	40	38
7	65	51	43	36	63	51	42	36	49	41	36	48	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	44	37	32	42	36	32	30
9	56	43	35	29	55	42	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	26	52	39	32	26	38	31	26	37	31	26	36	30	26	24

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	37621
5°	37557
10°	37408
15°	37167
20°	36928
25°	36619
30°	36092
35°	35737
40°	35283
45°	34906
50°	34421
55°	33750
60°	32767
65°	31360
70°	29294
75°	26005
80°	20732
85°	12568



TEST NUMBER: P366425

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BL89BW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	130.0	3.4
10°-20°	370.6	9.6
20°-30°	558.9	14.5
30°-40°	670.9	17.4
40°-50°	696.8	18.1
50°-60°	632.3	16.4
60°-70°	479.7	12.4
70°-80°	260.5	6.8
80°-90°	54.3	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1059.6	27.5
0°-40°	1730.4	44.9
0°-60°	3059.5	79.4
0°-90°	3854.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3854.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1377	
5°	1370	130
15°	1314	371
25°	1215	559
35°	1072	671
45°	904	697
55°	709	632
65°	485	480
75°	246	261
85°	40	54
90°	0	



TEST NUMBER: P366425

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BL89BW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1377.3
2.5°	1377.3
5°	1369.7
7.5°	1358.2
10°	1348.7
12.5°	1333.4
15°	1314.3
17.5°	1289.5
20°	1270.4
22.5°	1241.7
25°	1215.0
27.5°	1180.6
30°	1144.3
32.5°	1111.8
35°	1071.7
37.5°	1033.5
40°	989.5
42.5°	947.5
45°	903.6
47.5°	857.7
50°	810.0
52.5°	760.3
55°	708.7
57.5°	653.3
60°	599.8
62.5°	544.4
65°	485.2
67.5°	426.0
70°	366.8
72.5°	305.6
75°	246.4
77.5°	187.2
80°	131.8
82.5°	82.1
85°	40.1
87.5°	11.5
90°	0.0

(END OF REPORT)