

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366434

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366434
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-28)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM ACRYLIC, CLEAR 0.125", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4443.1 lumens
Efficiency: N/A
Efficacy: 76.5 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366434

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR89BV

Luminous Intensity Polar Plot

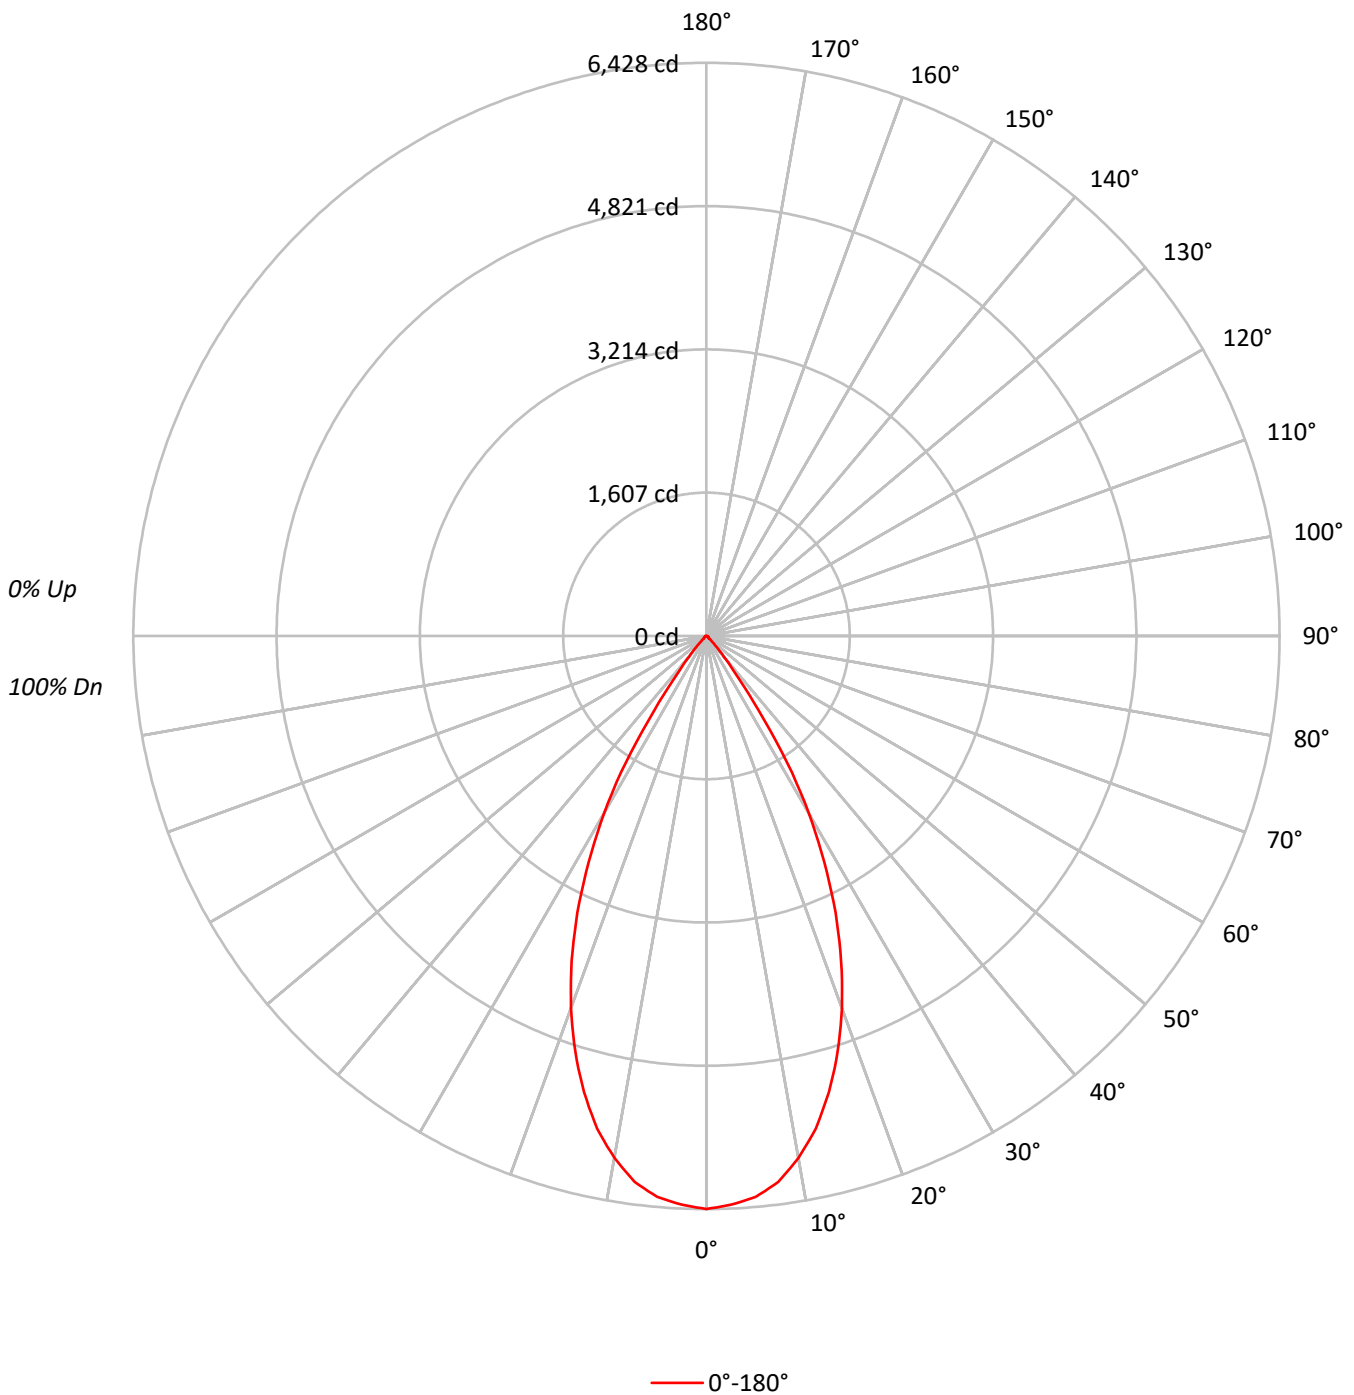



TEST NUMBER: P366434

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	74	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	460221
5°	454015
10°	432167
15°	392869
20°	338300
25°	270430
30°	189624
35°	88205
40°	27873
45°	8708
50°	3832
55°	3583
60°	3279
65°	2914
70°	3203
75°	3707
80°	4742
85°	7887



TEST NUMBER: P366434

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	591.3	13.3
10°-20°	1469.5	33.1
20°-30°	1544.9	34.8
30°-40°	685.4	15.4
40°-50°	85.7	1.9
50°-60°	25.7	0.6
60°-70°	18.0	0.4
70°-80°	14.2	0.3
80°-90°	8.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3605.8	81.2
0°-40°	4291.2	96.6
0°-60°	4402.6	99.1
0°-90°	4443.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4443.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6428	
5°	6317	591
15°	5300	1470
25°	3423	1545
35°	1009	685
45°	86	86
55°	29	26
65°	17	18
75°	13	14
85°	10	8
90°	0	



TEST NUMBER: P366434

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8027-F6LBXVM1-WMH-BTR89BV

CANDELA DISTRIBUTION (FULL):

	0°
0°	6427.5
2.5°	6385.5
5°	6316.7
7.5°	6175.2
10°	5944.0
12.5°	5661.1
15°	5299.9
17.5°	4892.8
20°	4439.8
22.5°	3948.6
25°	3423.0
27.5°	2865.0
30°	2293.5
32.5°	1687.6
35°	1009.1
37.5°	537.1
40°	298.2
42.5°	162.5
45°	86.0
47.5°	42.0
50°	34.4
52.5°	30.6
55°	28.7
57.5°	26.8
60°	22.9
62.5°	21.0
65°	17.2
67.5°	15.3
70°	15.3
72.5°	13.4
75°	13.4
77.5°	13.4
80°	11.5
82.5°	9.6
85°	9.6
87.5°	5.7
90°	0.0

(END OF REPORT)