

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365729

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-MW-BTR86**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365729  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-MW-BTR86  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, MATTE WHITE REFLECTOR,  
BOTTOM TRIM POLYCARBONATE, CLEAR 0.250", 6000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3414.0 lumens  
Efficiency: N/A  
Efficacy: 58.8 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.83  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365729

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-MW-BTR86

### Luminous Intensity Polar Plot

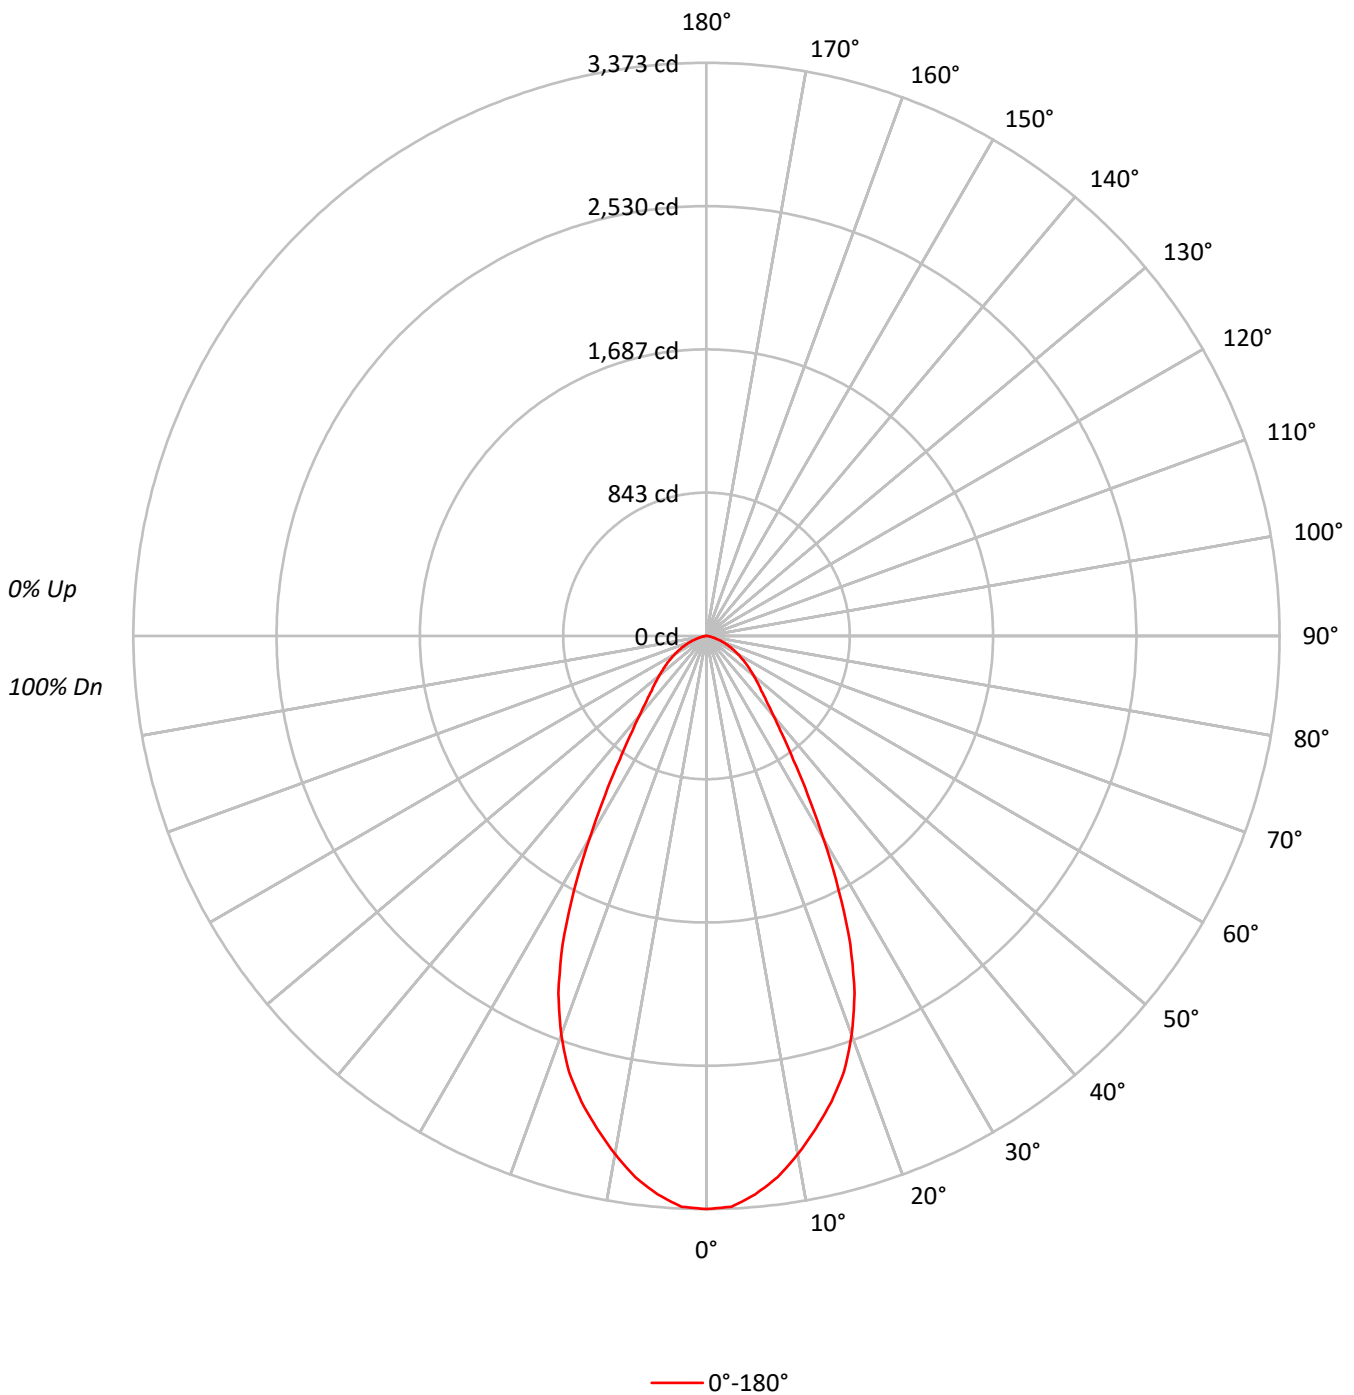



TEST NUMBER: P365729

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-MW-BTR86

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	103	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	98	93	89	94	91	87		91	88	85		88	86	84	82
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82	79	76	74
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	72	69	68
5	87	78	71	66	86	77	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	81	71	65	60	70	64	60		68	63	59		67	62	59	57
7	78	67	60	56	76	66	60	55	65	59	55		64	59	55		63	58	54	53
8	74	63	56	51	72	62	56	51	61	55	51		60	55	51		59	54	51	49
9	70	59	52	48	69	59	52	48	58	52	48		57	51	48		56	51	47	46
10	66	56	49	45	65	55	49	45	54	49	45		53	48	45		53	48	44	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	241484
5°	237095
10°	225165
15°	210463
20°	190455
25°	158166
30°	113485
35°	77891
40°	57334
45°	46327
50°	40280
55°	35415
60°	30617
65°	26057
70°	20495
75°	14358
80°	9071
85°	9858



TEST NUMBER: P365729

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-MW-BTR86

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	308.6	9.0
10°-20°	792.2	23.2
20°-30°	898.6	26.3
30°-40°	575.9	16.9
40°-50°	361.0	10.6
50°-60°	254.6	7.5
60°-70°	153.0	4.5
70°-80°	58.4	1.7
80°-90°	11.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1999.4	58.6
0°-40°	2575.3	75.4
0°-60°	3191.0	93.5
0°-90°	3414.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3414.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3373	
5°	3299	309
15°	2839	792
25°	2002	899
35°	891	576
45°	458	361
55°	284	255
65°	154	153
75°	52	58
85°	12	12
90°	0	



TEST NUMBER: P365729

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-MW-BTR86

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3372.6
2.5°	3362.6
5°	3298.7
7.5°	3212.8
10°	3096.9
12.5°	2971.0
15°	2839.2
17.5°	2689.3
20°	2499.5
22.5°	2277.7
25°	2002.0
27.5°	1684.3
30°	1372.6
32.5°	1108.9
35°	891.1
37.5°	733.3
40°	613.4
42.5°	525.5
45°	457.5
47.5°	407.6
50°	361.6
52.5°	321.7
55°	283.7
57.5°	247.8
60°	213.8
62.5°	183.8
65°	153.8
67.5°	125.9
70°	97.9
72.5°	73.9
75°	51.9
77.5°	36.0
80°	22.0
82.5°	14.0
85°	12.0
87.5°	6.0
90°	0.0

(END OF REPORT)