

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366446

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR82**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366446
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-32)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR82
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, PATTERN 12 0.187", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4291.0 lumens
Efficiency: N/A
Efficacy: 73.9 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.07
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366446

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR82

Luminous Intensity Polar Plot

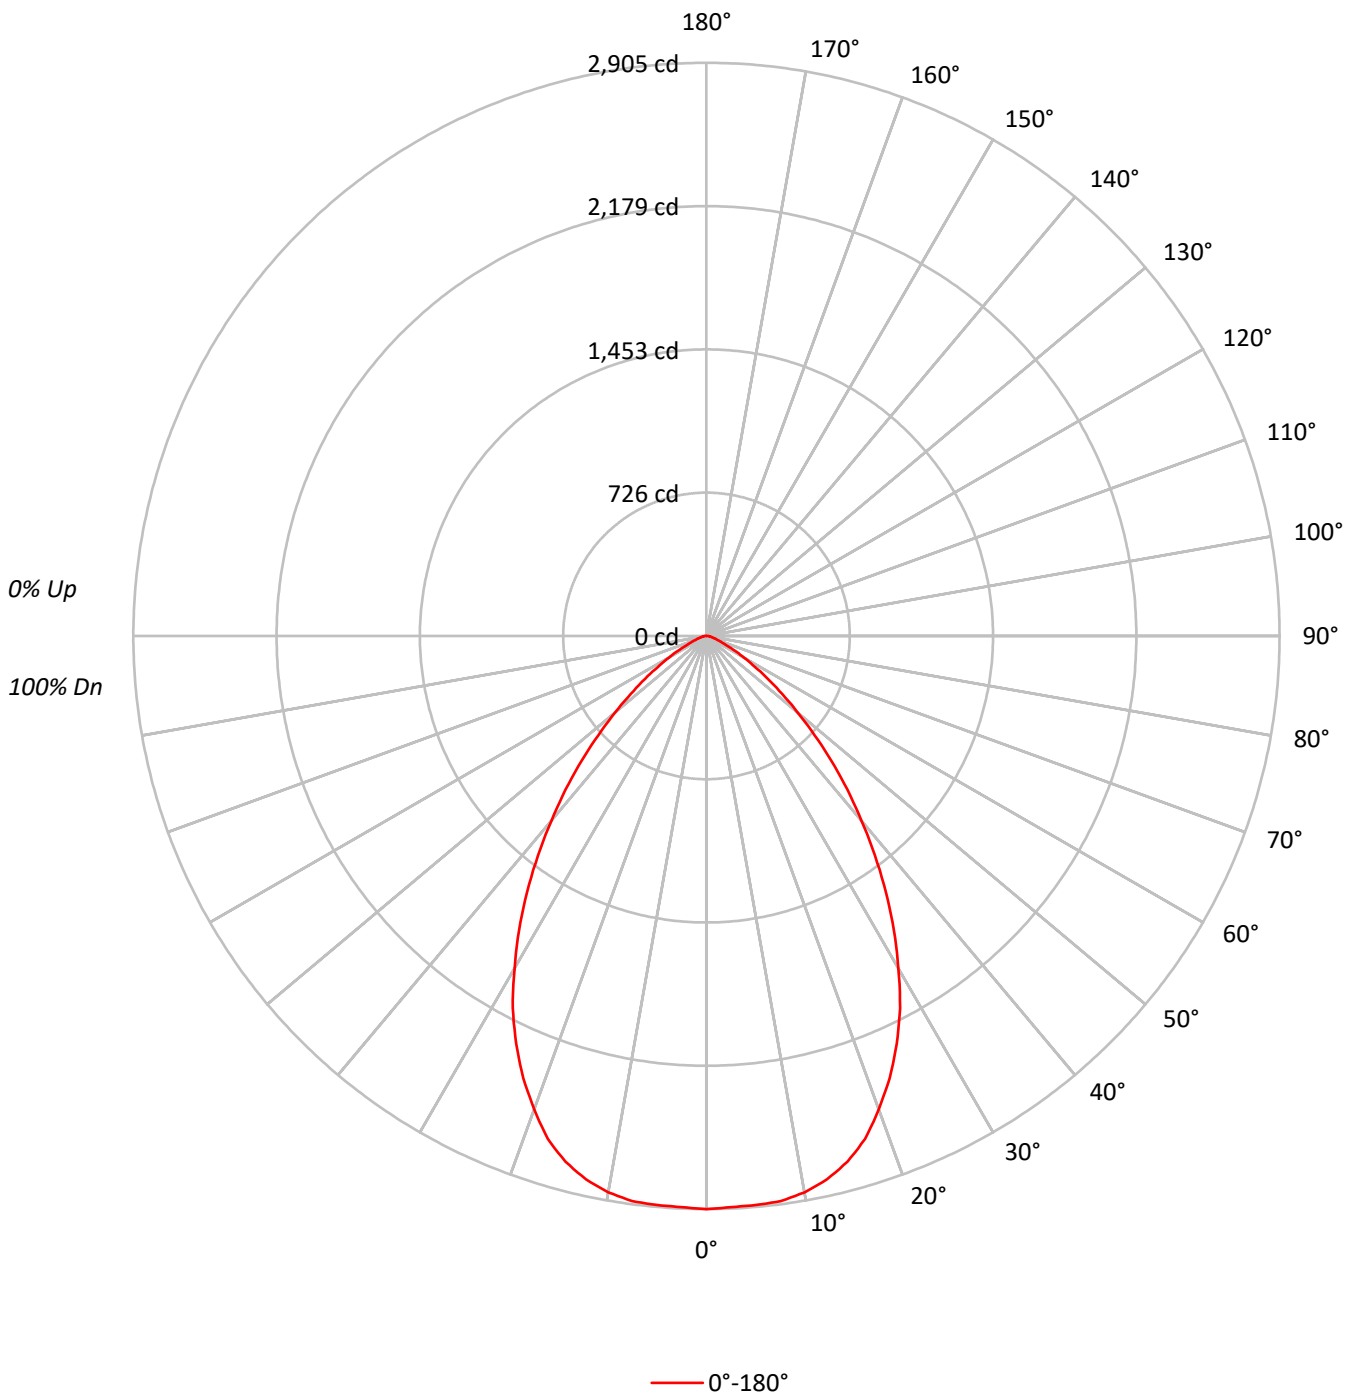



TEST NUMBER: P366446

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR82

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	106	104	101	102	100	98	99	97	95	95	94	92	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	82	76	70	90	81	75	70	79	73	69	77	72	68	75	71	67	66
5	86	75	68	63	84	74	68	63	73	67	62	71	66	62	69	65	61	59
6	80	69	62	57	79	69	62	57	67	61	56	65	60	56	64	59	56	54
7	75	64	57	52	74	63	57	52	62	56	51	61	55	51	60	55	51	49
8	71	60	52	47	69	59	52	47	58	52	47	57	51	47	55	50	47	45
9	67	55	48	44	66	55	48	44	54	48	43	53	47	43	52	47	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	44	40	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	208025
5°	208108
10°	208188
15°	204555
20°	194585
25°	180279
30°	160909
35°	138509
40°	114304
45°	90446
50°	67214
55°	47399
60°	31476
65°	19297
70°	12540
75°	9406
80°	8247
85°	9858



TEST NUMBER: P366446

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR82

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	275.6	6.4
10°-20°	772.5	18.0
20°-30°	1043.0	24.3
30°-40°	986.8	23.0
40°-50°	691.7	16.1
50°-60°	348.1	8.1
60°-70°	123.0	2.9
70°-80°	38.4	0.9
80°-90°	12.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2091.0	48.7
0°-40°	3077.9	71.7
0°-60°	4117.7	96.0
0°-90°	4291.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4291.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2905	
5°	2895	276
15°	2760	773
25°	2282	1043
35°	1585	987
45°	893	692
55°	380	348
65°	114	123
75°	34	38
85°	12	12
90°	0	



TEST NUMBER: P366446

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR82

CANDELA DISTRIBUTION (FULL):

	0°
0°	2905.3
2.5°	2897.4
5°	2895.4
7.5°	2889.4
10°	2863.4
12.5°	2821.4
15°	2759.5
17.5°	2673.6
20°	2553.7
22.5°	2425.8
25°	2281.9
27.5°	2126.1
30°	1946.2
32.5°	1768.4
35°	1584.6
37.5°	1402.7
40°	1222.9
42.5°	1057.0
45°	893.2
47.5°	743.3
50°	603.4
52.5°	483.6
55°	379.7
57.5°	291.7
60°	219.8
62.5°	161.9
65°	113.9
67.5°	83.9
70°	59.9
72.5°	46.0
75°	34.0
77.5°	26.0
80°	20.0
82.5°	16.0
85°	12.0
87.5°	6.0
90°	0.0

(END OF REPORT)