

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366450

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366450
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-30)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR87
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM POLYCARBONATE, CLEAR 0.375", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4356.0 lumens
Efficiency: N/A
Efficacy: 75.0 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366450

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR87

Luminous Intensity Polar Plot

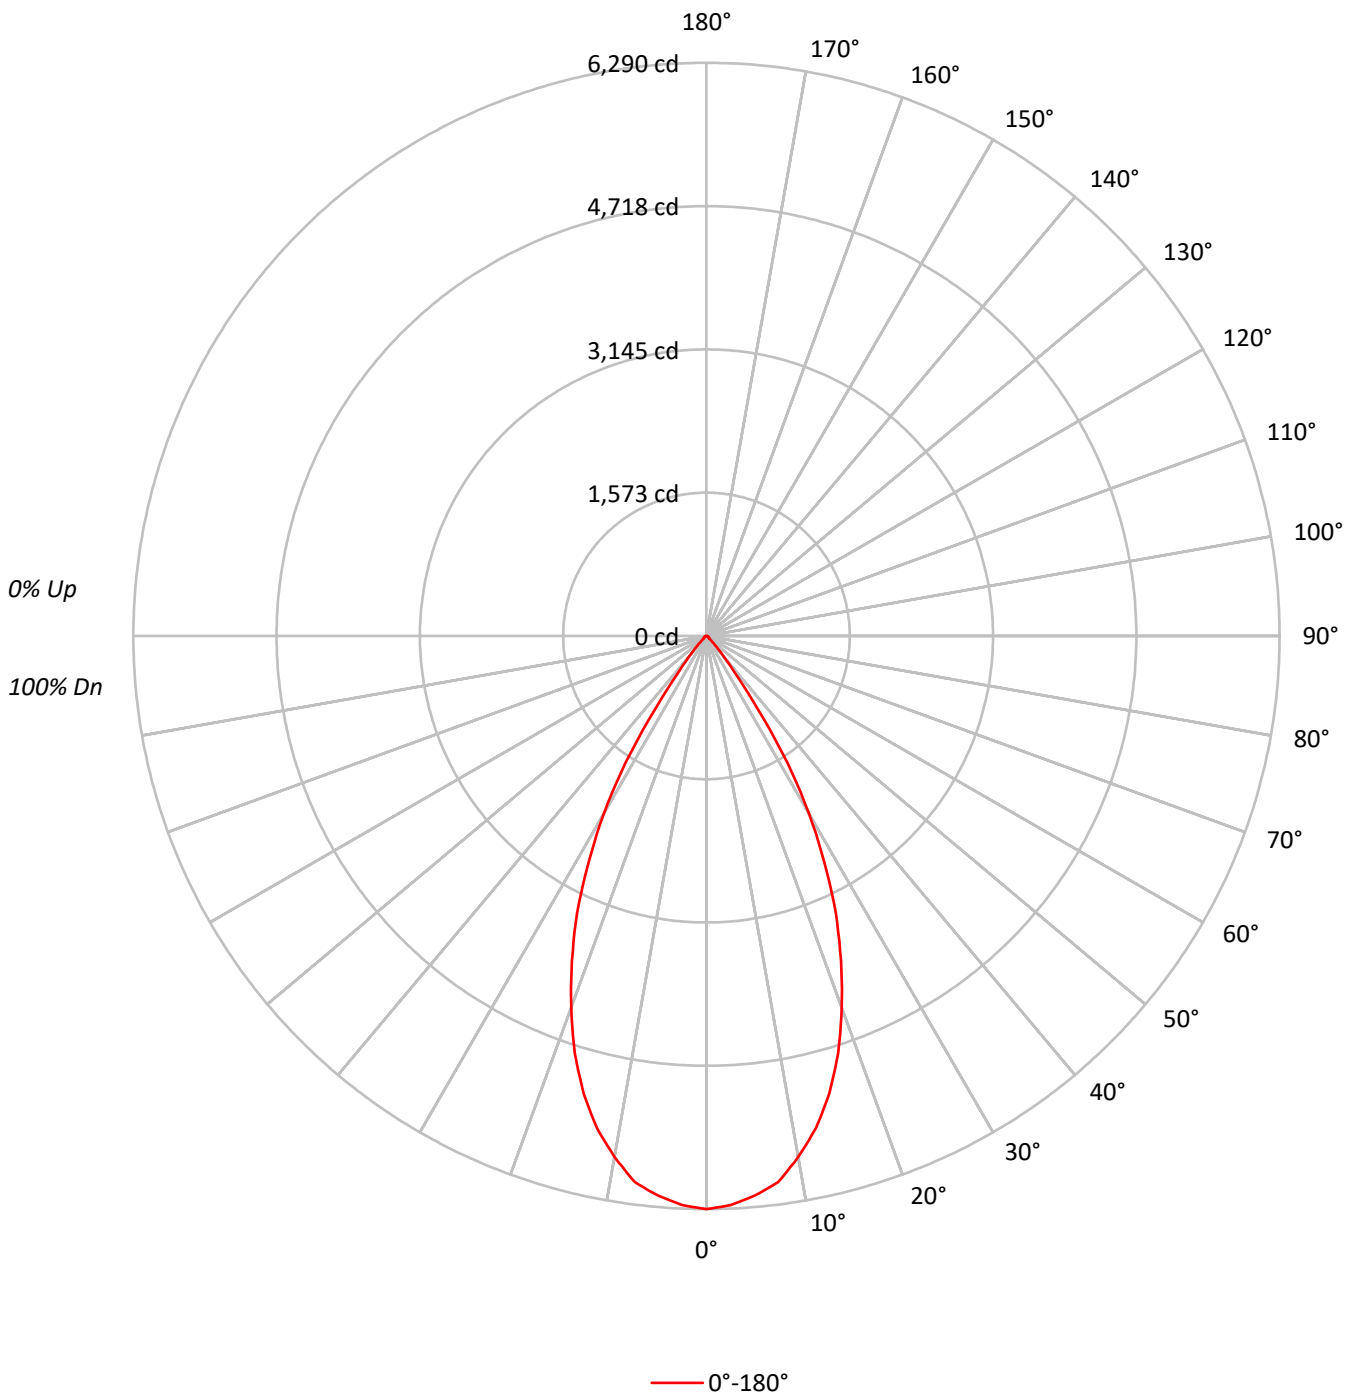



TEST NUMBER: P366450

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	64	61	78	69	64	61	69	64	60	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	450361
5°	442946
10°	422054
15°	385672
20°	330734
25°	265374
30°	186060
35°	85967
40°	27592
45°	8911
50°	4133
55°	3658
60°	3637
65°	3321
70°	3266
75°	3790
80°	4824
85°	8051



TEST NUMBER: P366450

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	578.0	13.3
10°-20°	1439.7	33.1
20°-30°	1512.0	34.7
30°-40°	671.0	15.4
40°-50°	86.7	2.0
50°-60°	27.1	0.6
60°-70°	19.1	0.4
70°-80°	13.9	0.3
80°-90°	8.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3529.7	81.0
0°-40°	4200.7	96.4
0°-60°	4314.4	99.0
0°-90°	4356.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4356.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6290	
5°	6163	578
15°	5203	1440
25°	3359	1512
35°	984	671
45°	88	87
55°	29	27
65°	20	19
75°	14	14
85°	10	9
90°	0	



TEST NUMBER: P366450

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8030-F6LBXVM1-WMH-BTR87

CANDELA DISTRIBUTION (FULL):

	0°
0°	6289.8
2.5°	6250.7
5°	6162.7
7.5°	6043.5
10°	5804.9
12.5°	5537.1
15°	5202.8
17.5°	4801.9
20°	4340.5
22.5°	3855.6
25°	3359.0
27.5°	2801.8
30°	2250.4
32.5°	1654.1
35°	983.5
37.5°	524.0
40°	295.2
42.5°	162.3
45°	88.0
47.5°	45.0
50°	37.1
52.5°	33.2
55°	29.3
57.5°	27.4
60°	25.4
62.5°	21.5
65°	19.6
67.5°	15.6
70°	15.6
72.5°	13.7
75°	13.7
77.5°	11.7
80°	11.7
82.5°	9.8
85°	9.8
87.5°	5.9
90°	0.0

(END OF REPORT)