

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365741

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-MW-BL89BW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365741  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-35)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-MW-BL89BW  
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, MATTE WHITE REFLECTOR, BOTTOM LENS ACRYLIC OPAL SMOOTH, CLEAR 0.125", 6000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3674.0 lumens  
Efficiency: N/A  
Efficacy: 63.2 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.36  
Luminous Opening: Circular (Dia: 0.71' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365741

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-MW-BL89BW

### Luminous Intensity Polar Plot

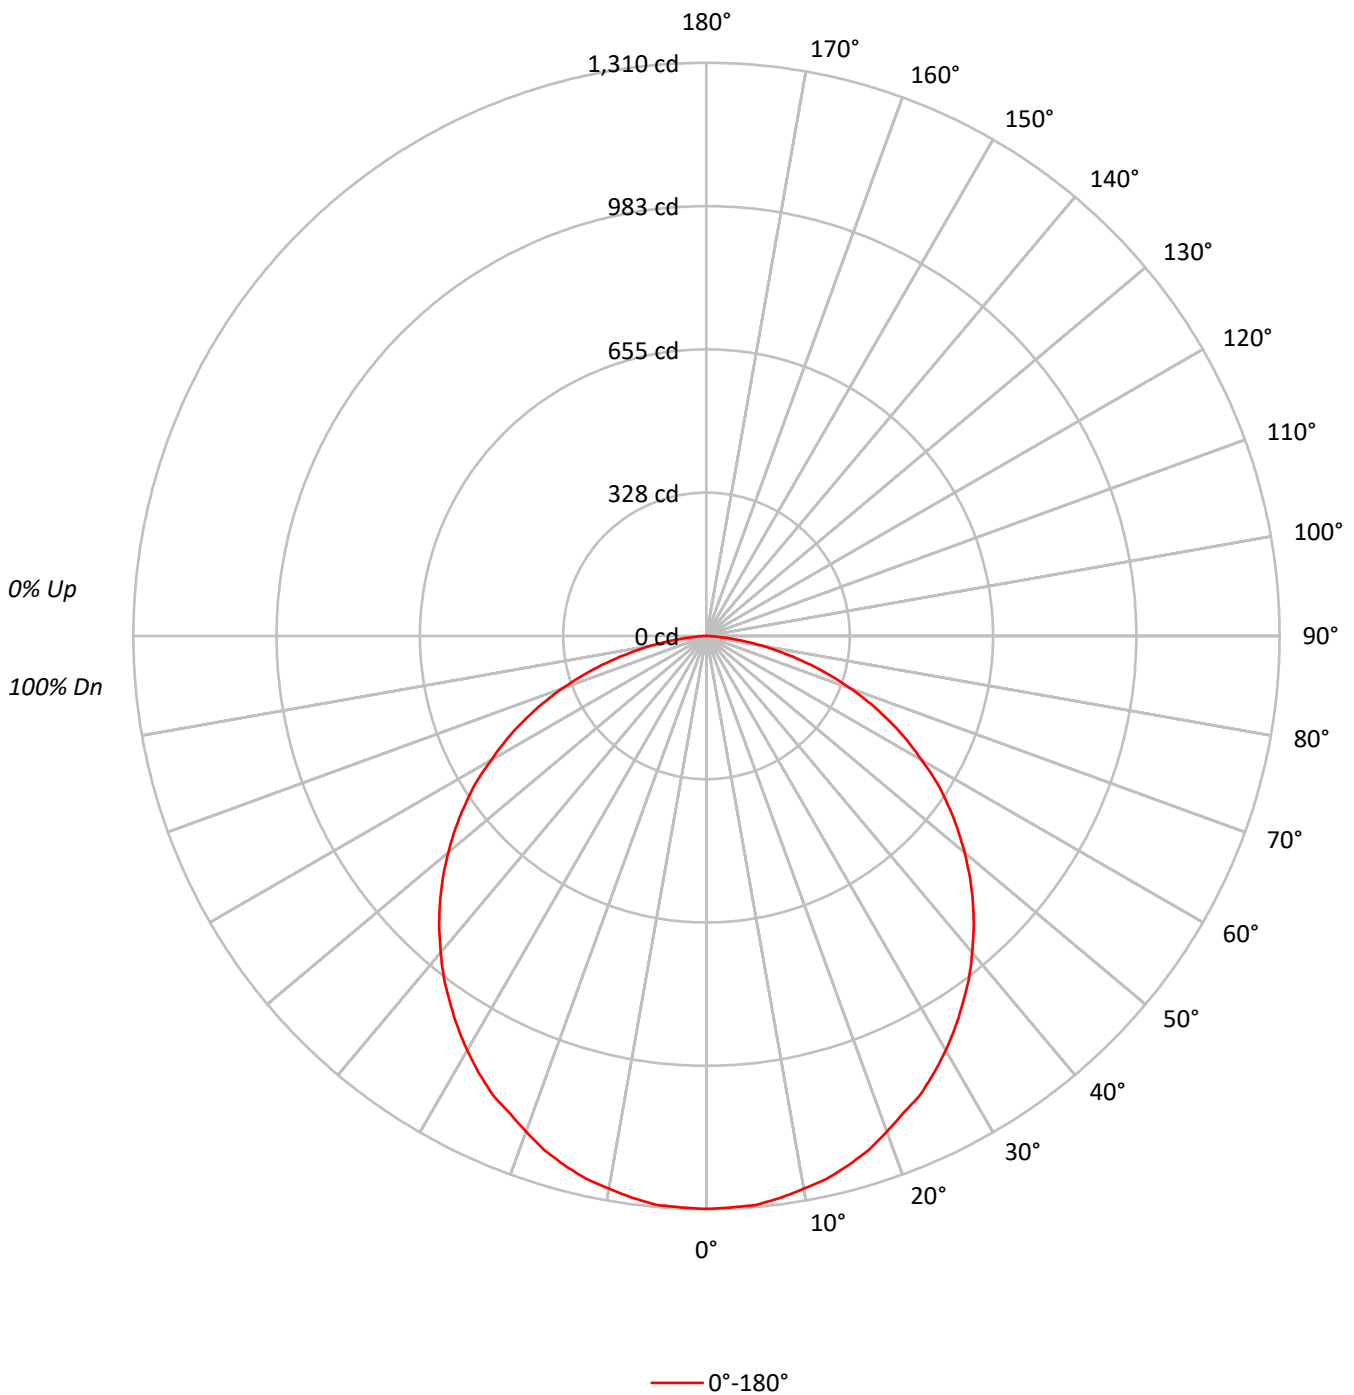



TEST NUMBER: P365741

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-MW-BL89BW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	95	98	94	92	94	91	89	90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	75	82	78	74	79	75	72	70
3	90	80	71	65	88	78	70	64	75	69	63	72	67	62	70	65	61	59
4	83	71	62	55	80	69	61	55	67	60	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	47	58	51	46	56	50	45	43
6	70	57	48	41	68	56	47	41	54	46	41	52	45	40	51	45	40	38
7	65	51	43	36	63	51	42	36	49	41	36	48	41	36	46	40	35	33
8	60	47	38	32	59	46	38	32	45	37	32	44	37	32	42	36	32	30
9	56	43	35	29	55	42	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	26	52	39	32	26	38	31	26	37	31	26	36	30	26	24

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	35769
5°	35794
10°	35586
15°	35416
20°	35045
25°	34862
30°	34493
35°	34089
40°	33693
45°	33276
50°	32713
55°	32102
60°	31041
65°	29880
70°	27977
75°	24928
80°	20182
85°	12129



TEST NUMBER: P365741

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-MW-BL89BW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	123.8	3.4
10°-20°	353.2	9.6
20°-30°	532.2	14.5
30°-40°	639.9	17.4
40°-50°	664.1	18.1
50°-60°	601.9	16.4
60°-70°	456.7	12.4
70°-80°	249.9	6.8
80°-90°	52.3	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1009.2	27.5
0°-40°	1649.1	44.9
0°-60°	2915.1	79.3
0°-90°	3674.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3674.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1310	
5°	1305	124
15°	1252	353
25°	1157	532
35°	1022	640
45°	861	664
55°	674	602
65°	462	457
75°	236	250
85°	39	52
90°	0	



TEST NUMBER: P365741

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-MW-BL89BW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1309.5
2.5°	1307.4
5°	1305.4
7.5°	1295.2
10°	1283.0
12.5°	1270.8
15°	1252.4
17.5°	1232.1
20°	1205.6
22.5°	1179.1
25°	1156.7
27.5°	1126.2
30°	1093.6
32.5°	1059.0
35°	1022.3
37.5°	985.7
40°	944.9
42.5°	904.2
45°	861.4
47.5°	816.6
50°	769.8
52.5°	723.0
55°	674.1
57.5°	625.2
60°	568.2
62.5°	517.3
65°	462.3
67.5°	407.3
70°	350.3
72.5°	293.3
75°	236.2
77.5°	179.2
80°	128.3
82.5°	79.4
85°	38.7
87.5°	10.2
90°	0.0

(END OF REPORT)