

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P366470

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR89BV**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P366470
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-28)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR89BV
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, WARM HAZE REFLECTOR,
BOTTOM TRIM ACRYLIC, CLEAR 0.125", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4738.0 lumens
Efficiency: N/A
Efficacy: 81.5 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.8
Luminous Opening: Circular (Dia: 0.44' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P366470

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR89BV

Luminous Intensity Polar Plot

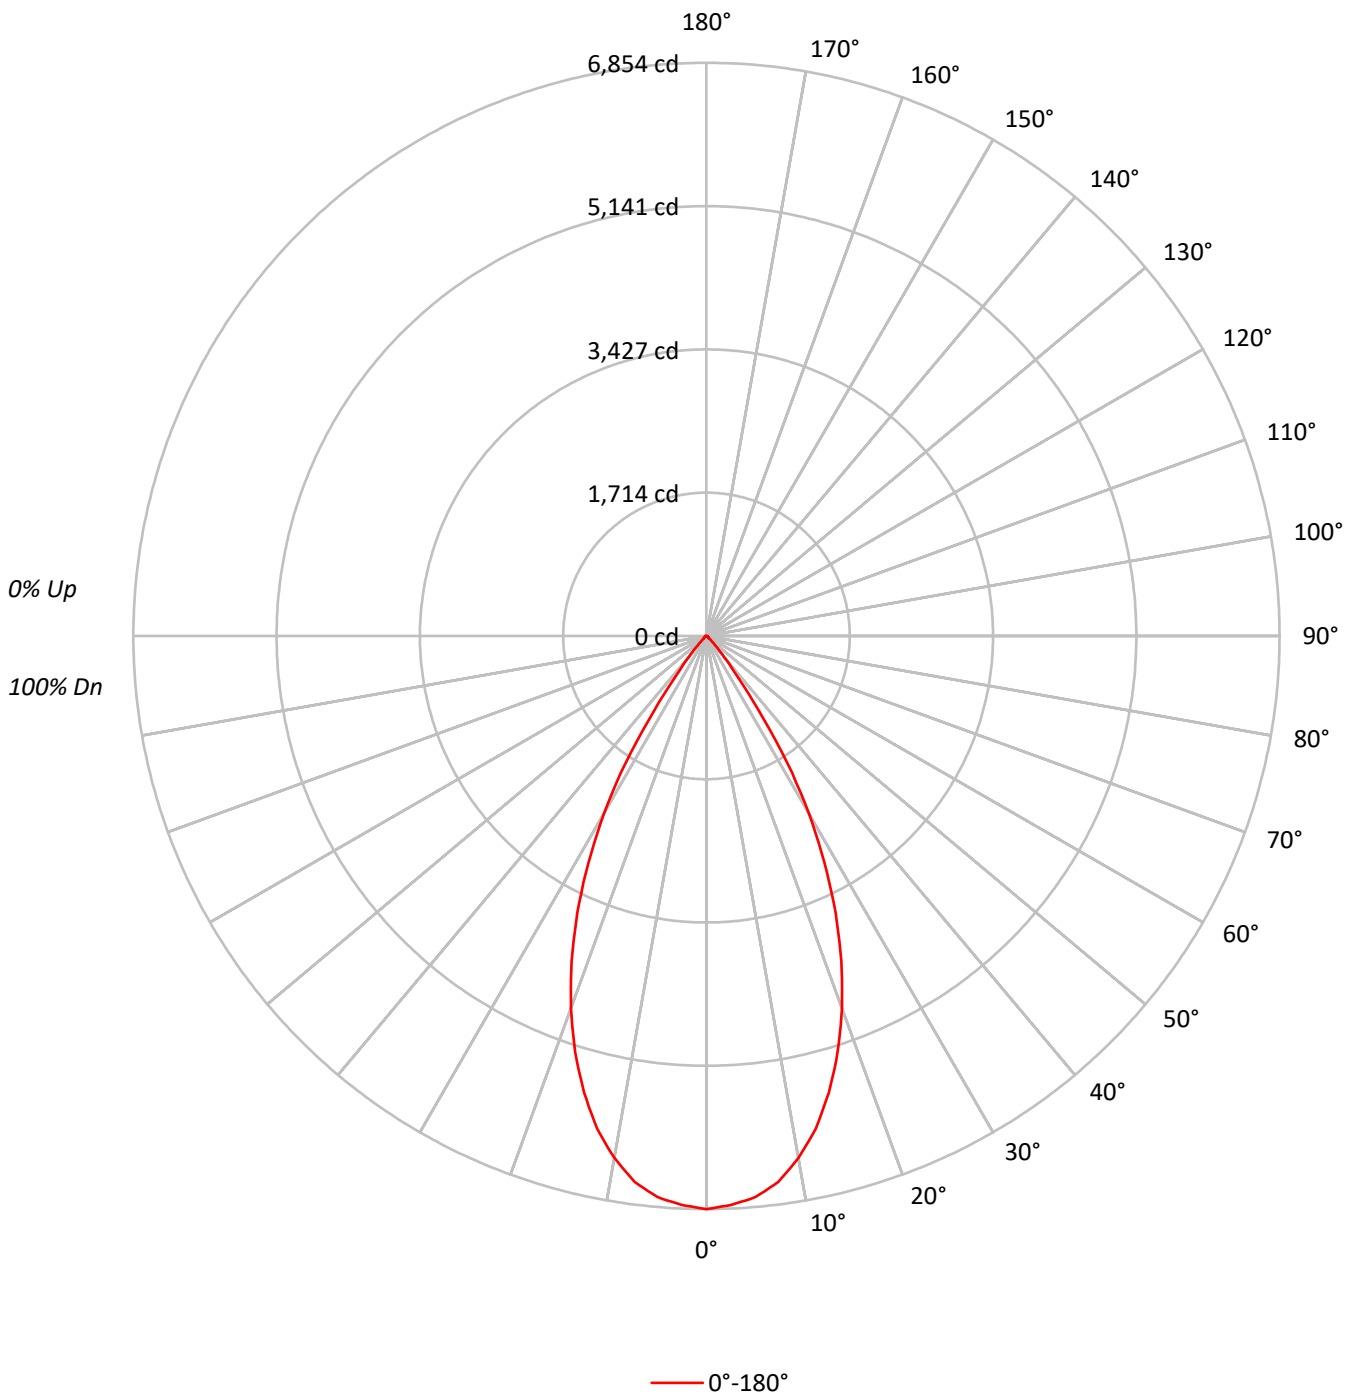



TEST NUMBER: P366470

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR89BV

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	80	78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74
6	90	82	76	72	89	81	76	72	80	75	72	78	74	71	77	74	71	69
7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	74	70	67	66
8	82	74	68	64	81	73	68	64	72	67	64	71	67	64	70	66	63	62
9	79	70	65	61	78	70	64	61	69	64	61	68	63	60	67	63	60	59
10	76	67	61	58	75	66	61	58	65	61	57	65	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	490781
5°	484160
10°	460857
15°	418955
20°	360763
25°	288388
30°	202216
35°	94062
40°	29723
45°	9286
50°	4088
55°	3820
60°	3508
65°	3100
70°	3412
75°	3956
80°	5031
85°	8380



TEST NUMBER: P366470

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR89BV

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	630.5	13.3
10°-20°	1567.1	33.1
20°-30°	1647.5	34.8
30°-40°	730.9	15.4
40°-50°	91.4	1.9
50°-60°	27.3	0.6
60°-70°	19.1	0.4
70°-80°	15.1	0.3
80°-90°	8.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3845.2	81.2
0°-40°	4576.1	96.6
0°-60°	4694.9	99.1
0°-90°	4738.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4738.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6854	
5°	6736	631
15°	5652	1567
25°	3650	1648
35°	1076	731
45°	92	91
55°	31	27
65°	18	19
75°	14	15
85°	10	9
90°	0	



TEST NUMBER: P366470

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8035-F6LBXVM1-WMH-BTR89BV

CANDELA DISTRIBUTION (FULL):

0°	
0°	6854.3
2.5°	6809.4
5°	6736.1
7.5°	6585.2
10°	6338.6
12.5°	6037.0
15°	5651.8
17.5°	5217.6
20°	4734.6
22.5°	4210.8
25°	3650.3
27.5°	3055.2
30°	2445.8
32.5°	1799.7
35°	1076.1
37.5°	572.7
40°	318.0
42.5°	173.2
45°	91.7
47.5°	44.8
50°	36.7
52.5°	32.6
55°	30.6
57.5°	28.5
60°	24.5
62.5°	22.4
65°	18.3
67.5°	16.3
70°	16.3
72.5°	14.3
75°	14.3
77.5°	14.3
80°	12.2
82.5°	10.2
85°	10.2
87.5°	6.1
90°	0.0

(END OF REPORT)