

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365036

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BL87**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365036
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-43)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BL87
Description: VANDAL RESISTANT ENCLOSED BOTTOM LENS, SPECULAR CLEAR REFLECTOR,
BOTTOM LENS POLYCARBONATE, CLEAR 0.375", 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5156.9 lumens
Efficiency: N/A
Efficacy: 88.8 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.82
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365036

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BL87

Luminous Intensity Polar Plot

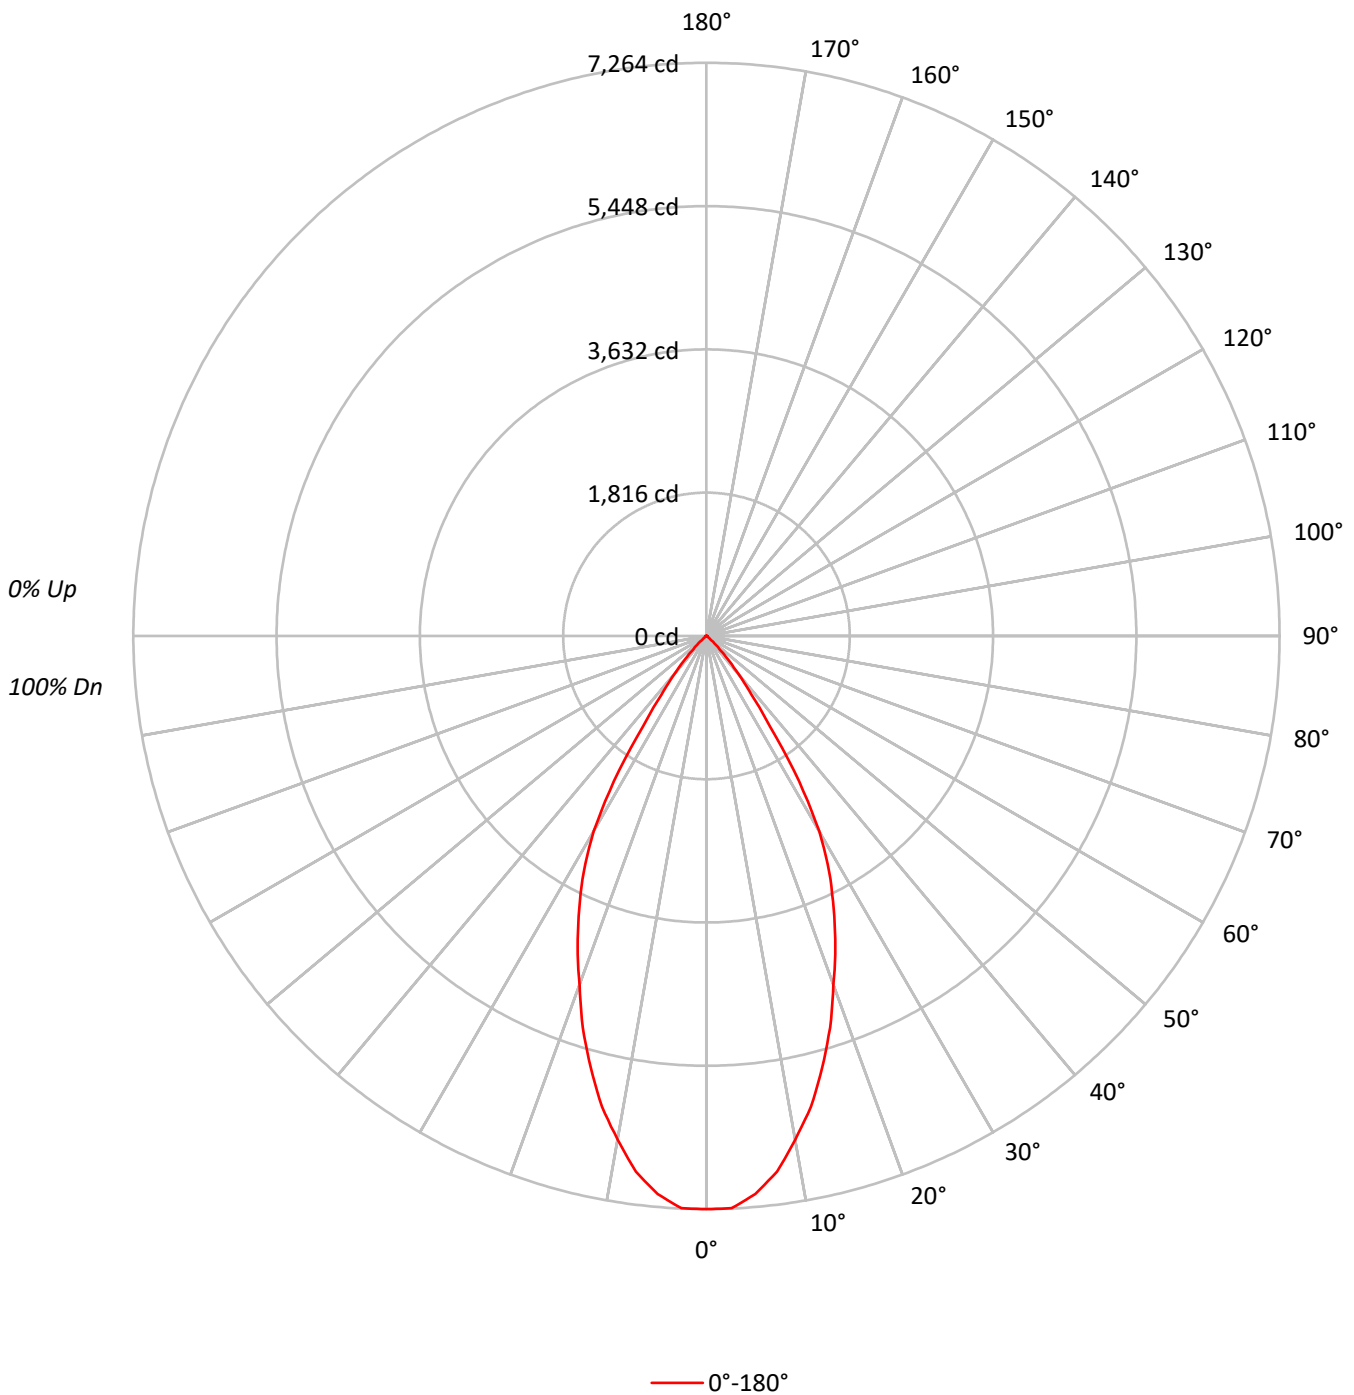



TEST NUMBER: P365036

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BL87

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90	88
3	103	97	93	89	101	96	92	88	93	90	87		91	88	85		89	86	84	83
4	99	91	86	82	97	90	85	82	88	84	81		86	83	80		84	81	79	77
5	94	86	80	76	92	85	80	76	83	79	75		82	78	75		80	77	74	73
6	90	81	75	71	88	80	75	71	79	74	71		77	73	70		76	73	70	68
7	85	77	71	67	84	76	71	67	75	70	66		74	69	66		72	69	66	64
8	82	72	67	63	80	72	67	63	71	66	63		70	65	62		69	65	62	61
9	78	69	63	59	77	68	63	59	67	62	59		66	62	59		66	62	59	57
10	74	65	60	56	74	65	60	56	64	59	56		63	59	56		63	58	56	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	198410
5°	194638
10°	179745
15°	160171
20°	136790
25°	114881
30°	90182
35°	46731
40°	22318
45°	8784
50°	2312
55°	648
60°	426
65°	375
70°	311
75°	412
80°	299
85°	595



TEST NUMBER: P365036

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BL87

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	658.2	12.8
10°-20°	1574.2	30.5
20°-30°	1738.0	33.7
30°-40°	956.4	18.5
40°-50°	202.1	3.9
50°-60°	17.1	0.3
60°-70°	5.3	0.1
70°-80°	3.8	0.1
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3970.4	77.0
0°-40°	4926.8	95.5
0°-60°	5146.0	99.8
0°-90°	5156.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5156.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7264	
5°	7098	658
15°	5664	1574
25°	3812	1738
35°	1401	956
45°	227	202
55°	14	17
65°	6	5
75°	4	4
85°	2	2
90°	0	



TEST NUMBER: P365036

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BL87

CANDELA DISTRIBUTION (FULL):

	0°
0°	7263.7
2.5°	7259.8
5°	7098.5
7.5°	6849.7
10°	6480.4
12.5°	6113.0
15°	5664.0
17.5°	5207.3
20°	4705.8
22.5°	4266.5
25°	3811.7
27.5°	3372.4
30°	2859.2
32.5°	2182.8
35°	1401.4
37.5°	944.7
40°	625.9
42.5°	390.7
45°	227.4
47.5°	116.6
50°	54.4
52.5°	23.3
55°	13.6
57.5°	9.7
60°	7.8
62.5°	5.8
65°	5.8
67.5°	3.9
70°	3.9
72.5°	5.8
75°	3.9
77.5°	1.9
80°	1.9
82.5°	1.9
85°	1.9
87.5°	1.9
90°	0.0

(END OF REPORT)