

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365040

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR80**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365040  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-23)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR80  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, PATTERN 12 0.125", 6000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4768.9 lumens  
Efficiency: N/A  
Efficacy: 82.1 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365040

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR80

### Luminous Intensity Polar Plot

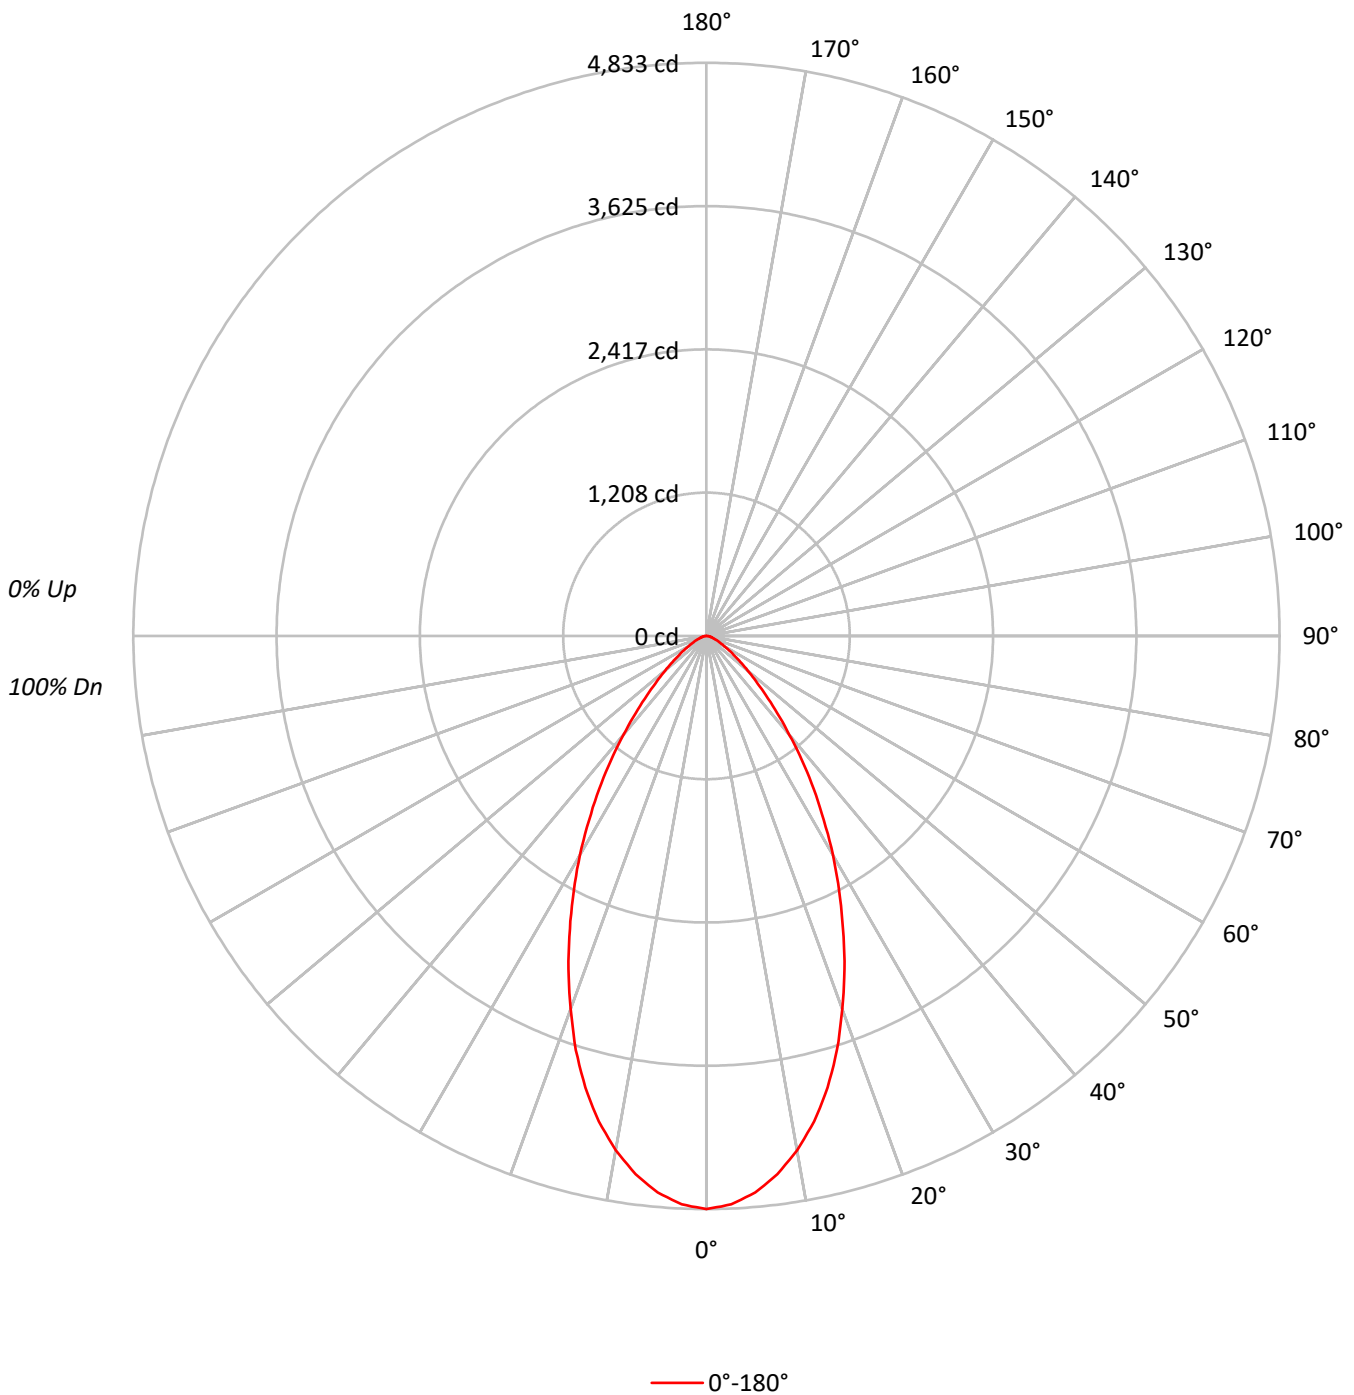



TEST NUMBER: P365040

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR80

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96	95	93	91
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89	87	85	83
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83	80	78	76
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78	74	71	69
5	88	79	72	67	87	78	72	67	76	71	67		74	70	66		73	69	65	64
6	83	73	67	62	82	73	66	62	71	65	61		69	65	61		68	64	60	59
7	79	68	62	57	77	68	61	57	66	61	57		65	60	56		64	59	56	54
8	75	64	57	53	73	63	57	53	62	57	52		61	56	52		60	55	52	50
9	71	60	54	49	69	60	53	49	59	53	49		58	52	49		57	52	49	47
10	67	57	50	46	66	56	50	46	55	50	46		54	49	46		54	49	45	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	346037
5°	338626
10°	320083
15°	292300
20°	254963
25°	215222
30°	176378
35°	137871
40°	101620
45°	71520
50°	50461
55°	35727
60°	25361
65°	18840
70°	14654
75°	11951
80°	11051
85°	11830



TEST NUMBER: P365040

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR80

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	439.9	9.2
10°-20°	1095.3	23.0
20°-30°	1247.8	26.2
30°-40°	984.9	20.7
40°-50°	559.8	11.7
50°-60°	264.1	5.5
60°-70°	114.3	2.4
70°-80°	47.5	1.0
80°-90°	15.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2783.0	58.4
0°-40°	3767.9	79.0
0°-60°	4591.8	96.3
0°-90°	4768.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4768.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4833	
5°	4711	440
15°	3943	1095
25°	2724	1248
35°	1577	985
45°	706	560
55°	286	264
65°	111	114
75°	43	47
85°	14	15
90°	0	



TEST NUMBER: P365040

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR80

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4832.8
2.5°	4797.8
5°	4711.3
7.5°	4577.5
10°	4402.4
12.5°	4192.4
15°	3943.2
17.5°	3661.1
20°	3346.1
22.5°	3041.3
25°	2724.2
27.5°	2421.5
30°	2133.3
32.5°	1840.9
35°	1577.3
37.5°	1324.0
40°	1087.2
42.5°	885.4
45°	706.3
47.5°	564.2
50°	453.0
52.5°	360.3
55°	286.2
57.5°	226.5
60°	177.1
62.5°	140.0
65°	111.2
67.5°	88.5
70°	70.0
72.5°	55.6
75°	43.2
77.5°	32.9
80°	26.8
82.5°	20.6
85°	14.4
87.5°	8.2
90°	0.0

(END OF REPORT)