

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365048

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR89BV**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P365048  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-22)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR89BV  
Description: VANDAL RESISTANT ENCLOSED BOTTOM TRIM RING, SPECULAR CLEAR REFLECTOR, BOTTOM TRIM ACRYLIC, CLEAR 0.125", 6000LM  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4883.1 lumens  
Efficiency: N/A  
Efficacy: 84.0 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.77  
Luminous Opening: Circular (Dia: 0.44' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P365048

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR89BV

### Luminous Intensity Polar Plot

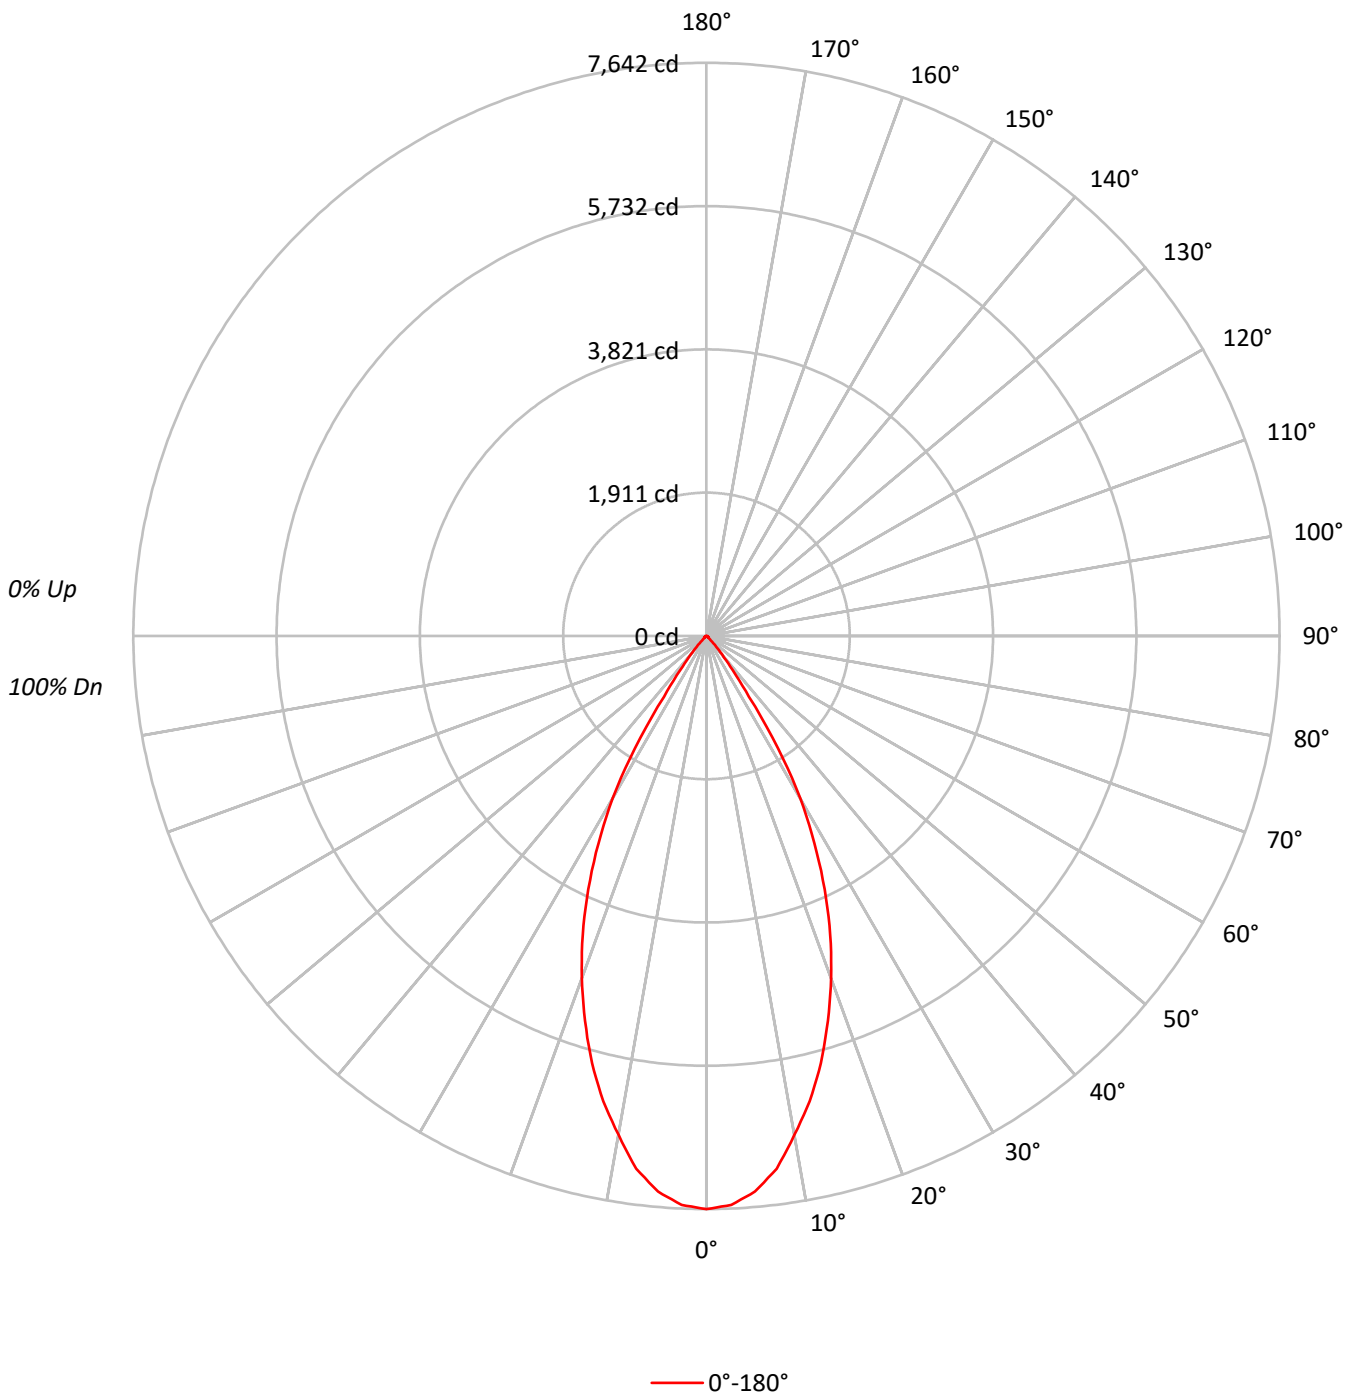



TEST NUMBER: P365048

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR89BV

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	89
3	104	98	93	90	102	97	92	89	94	90	87	92	89	86	89	87	85	83
4	99	92	87	83	97	91	86	83	89	85	82	87	84	81	85	82	80	79
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70
7	87	78	73	69	85	77	72	69	76	72	68	75	71	68	74	70	68	66
8	83	74	69	65	82	74	68	65	73	68	65	72	67	64	71	67	64	63
9	79	71	65	62	78	70	65	61	69	65	61	68	64	61	68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	547146
5°	534436
10°	491212
15°	437161
20°	370287
25°	294455
30°	207019
35°	86396
40°	29835
45°	7716
50°	3899
55°	3595
60°	3537
65°	3490
70°	3454
75°	4565
80°	5113
85°	8462



TEST NUMBER: P365048

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR89BV

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	688.4	14.1
10°-20°	1633.6	33.5
20°-30°	1685.7	34.5
30°-40°	717.0	14.7
40°-50°	86.0	1.8
50°-60°	26.0	0.5
60°-70°	20.4	0.4
70°-80°	16.3	0.3
80°-90°	9.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4007.7	82.1
0°-40°	4724.7	96.8
0°-60°	4836.8	99.1
0°-90°	4883.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4883.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7642	
5°	7436	688
15°	5897	1634
25°	3727	1686
35°	988	717
45°	76	86
55°	29	26
65°	21	20
75°	16	16
85°	10	10
90°	0	



TEST NUMBER: P365048

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI-BTR89BV

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7641.5
2.5°	7592.1
5°	7435.6
7.5°	7163.8
10°	6756.1
12.5°	6354.5
15°	5897.4
17.5°	5382.6
20°	4859.6
22.5°	4313.9
25°	3727.1
27.5°	3121.7
30°	2503.9
32.5°	1775.0
35°	988.4
37.5°	568.3
40°	319.2
42.5°	164.7
45°	76.2
47.5°	41.2
50°	35.0
52.5°	30.9
55°	28.8
57.5°	26.8
60°	24.7
62.5°	22.7
65°	20.6
67.5°	18.5
70°	16.5
72.5°	16.5
75°	16.5
77.5°	14.4
80°	12.4
82.5°	12.4
85°	10.3
87.5°	6.2
90°	0.0

(END OF REPORT)