

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P365050

Luminaire Tested: **FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P365050
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1910-544-10)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI
Description: VANDAL RESISTANT OPEN, SPECULAR CLEAR REFLECTOR, 6000LM
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6036.0 lumens
Efficiency: N/A
Efficacy: 103.9 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.81
Luminous Opening: Circular (Dia: 0.71' x H: 0')
CIE Type: Direct


Input Watts (W): 58.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P365050

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI

Luminous Intensity Polar Plot

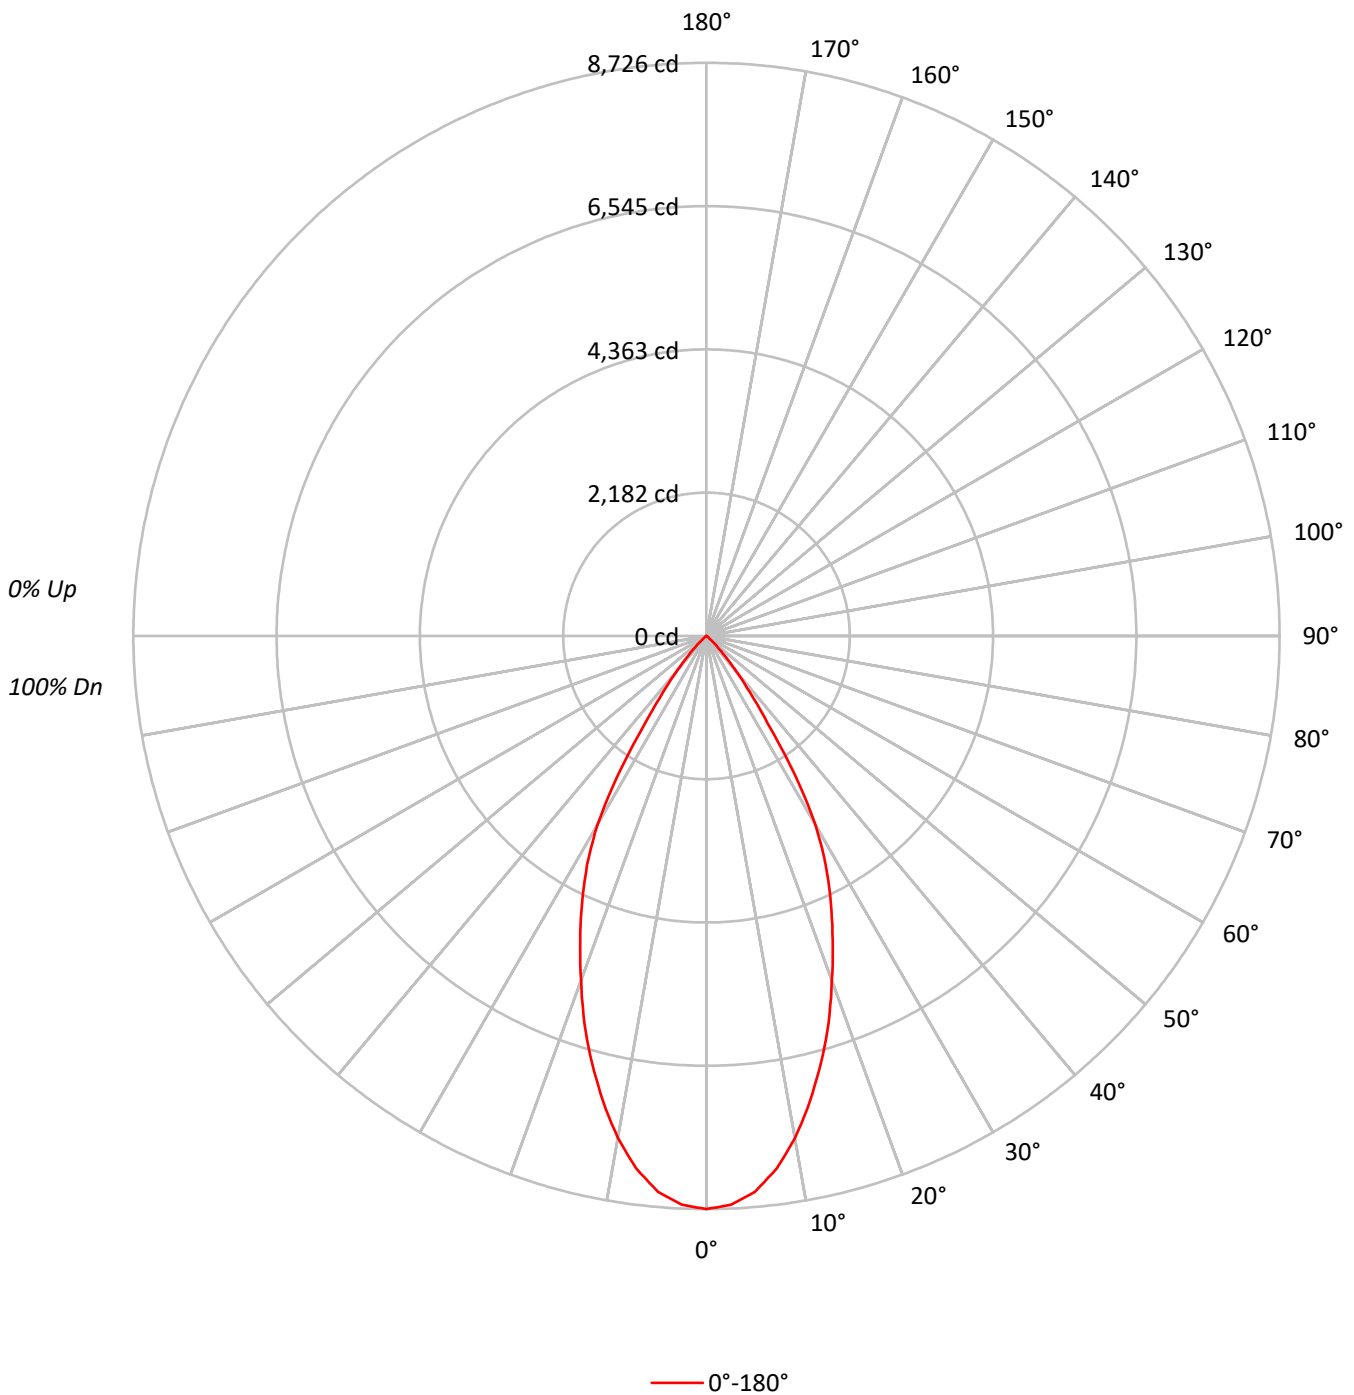



TEST NUMBER: P365050

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88
3	104	98	93	89	102	96	92	88	94	90	87	91	88	86	89	87	84	83
4	99	92	87	83	97	91	86	82	88	84	81	87	83	80	85	82	79	78
5	94	86	81	77	93	85	80	76	84	79	76	82	78	75	81	77	75	73
6	90	81	76	72	88	81	75	72	79	75	71	78	74	71	77	73	70	69
7	86	77	71	67	84	76	71	67	75	70	67	74	70	66	73	69	66	65
8	82	73	67	63	81	72	67	63	71	66	63	70	66	63	69	65	62	61
9	78	69	64	60	77	69	63	60	68	63	60	67	62	59	66	62	59	58
10	75	66	60	57	74	65	60	56	64	60	56	64	59	56	63	59	56	55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	238342
5°	232872
10°	215286
15°	190376
20°	162288
25°	134999
30°	104706
35°	54387
40°	25260
45°	9545
50°	2099
55°	295
60°	115
65°	136
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P365050

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	787.0	13.0
10°-20°	1871.4	31.0
20°-30°	2039.7	33.8
30°-40°	1102.8	18.3
40°-50°	222.8	3.7
50°-60°	10.6	0.2
60°-70°	1.8	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4698.0	77.8
0°-40°	5800.8	96.1
0°-60°	6034.2	100.0
0°-90°	6036.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6036.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8726	
5°	8493	787
15°	6732	1871
25°	4479	2040
35°	1631	1103
45°	247	223
55°	6	11
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P365050

CATALOG NUMBER: FLD6BX60D010TE-FEU6B67-8040-F6LBXVM1-LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	8725.6
2.5°	8667.9
5°	8492.9
7.5°	8177.8
10°	7761.8
12.5°	7265.5
15°	6732.1
17.5°	6180.2
20°	5583.0
22.5°	5020.8
25°	4479.2
27.5°	3935.5
30°	3319.7
32.5°	2498.0
35°	1631.0
37.5°	1089.4
40°	708.4
42.5°	436.6
45°	247.1
47.5°	123.6
50°	49.4
52.5°	12.4
55°	6.2
57.5°	4.1
60°	2.1
62.5°	2.1
65°	2.1
67.5°	2.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)